
		C	





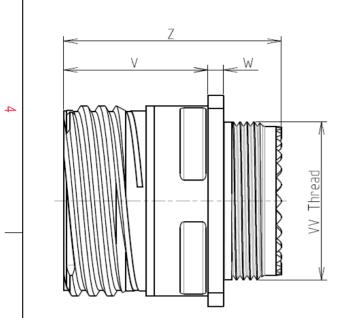

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.44 g ± 10%

8D 0

G

11

Κ

99

А

F

Е

Connector dimension			
Nominal			
3.25±0.2			
4.93±0.2			
20.62			
18.26			
26.2±0.3			
20.83+0/-1.25			
2.1/2.5			
31.5 Max			
M15x1-6g			


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-99

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

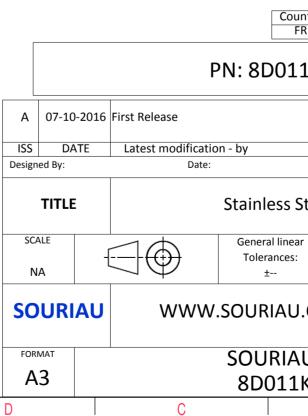

	Φ		A			
					4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or b n, technical n Jurisd	mply with by a third par			2	
				MOD N°		
CUSTOMER DRAWING Steel Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
	9AE-C		•	1/2	J	
	В	1	A			

		۵	н п	m		0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positi ID A A B C C D E F G Shell Arrangement Numb size no.	(mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) 000 (0.00) 006 (0.00) +.000 (0.00)]		2	
ω	11 -99 7]			Dim ØA ØAA R1 ØT
	9					SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
0						Country FR
						PN: 8D011K
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Stainless Ste
_					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011K9
	Н	G	F	E	D	C

