



| HDMI AOC P/N | OVERALL LENGTH, L (m) |
|--------------|-----------------------|
| 1064134001 | 1 |
| 1064134003 | 3 |
| 1064134005 | 5 |
| 1064134010 | 10 |
| 1064134020 | 20 |
| 1064134030 | 30 |
| 1064134040 | 40 |
| 1064134045 | 45 |
| 1064134050 | 50 |

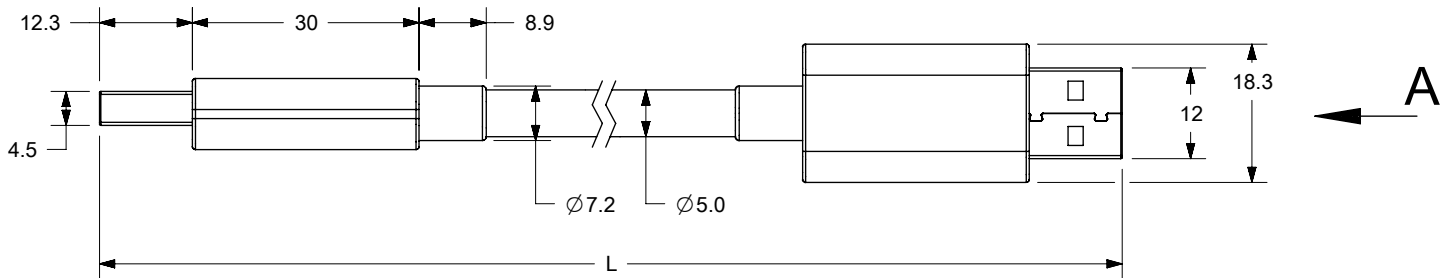

VIEW A
ROTATED 90° CW

NOTES:

- SUPPORTS USB3.1 GEN2 (BANDWIDTH 10Gbps).
BACKWARDS COMPATIBLE WITH USB2.0
POWER DELIVERY: 5V / 2A (<5M), 5V1A (5M - 10M)
- MATERIAL:
BACKSHELL - AL ALLOY, ANODIC OXIDATION, COLOR - NATURAL
CABLE - BLACK, FIRE RETARDANT PVC, INCLUDE 5X COPPER WIRES
AND 2X MULTIMODE FIBERS (50/125 μm, OM2),
KEVLAR FILLS AND THE TENSION CAN REACH 100 N
- STANDARD USB TYPE-A MALE CONNECTOR.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| | | | | | | |
|--|------------------------|---|--------|--------------------------|----------|--------------|
| DIMENSION UNITS mm | SCALE 1:1 | CURRENT REV DESC: Obsoleted part number as per PCN#511465 | | molex | | |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | | EC NO: 691224 | | | | |
| ANGULAR TOL ± ° | | DRWN: SUGEEB 2022/01/06 | | PRODUCT CUSTOMER DRAWING | | |
| 4 PLACES ± | | CHK'D: GGA 2022/01/19 | | DOCUMENT NUMBER | | |
| 3 PLACES ± | | APPR: GGA 2022/01/19 | | 1064134001 | | DOC TYPE |
| 2 PLACES ± | | INITIAL REVISION: | | PSD | | DOC PART |
| 1 PLACE ± | | DRWN: IGUMIN 2018/04/06 | | 000 | | REVISION |
| 0 PLACES ± | | APPR: IGUMIN 2018/04/24 | | A3 | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
| | | A-SIZE | 106413 | SEE TABLE | | 1 OF 1 |

| | | | | |
|-----------------|----|--------------|------------|----------|
| DOCUMENT STATUS | P1 | RELEASE DATE | 2022/01/19 | 08:50:10 |
|-----------------|----|--------------|------------|----------|