
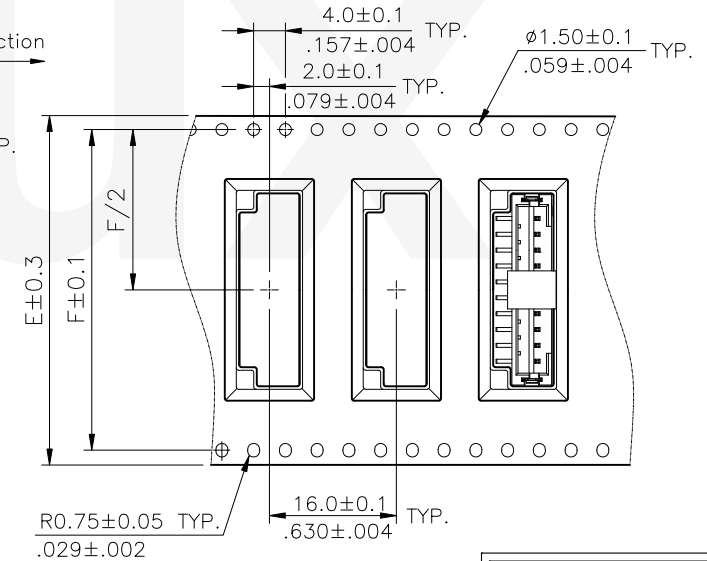
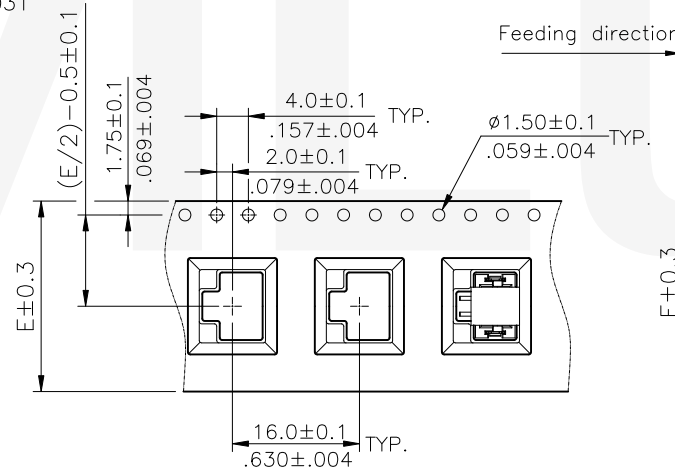


NOTE :

- ⚠ * Reel Material : HIPS
- * Carrier Material : Transparent Anti-static Polysyrene.
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481 requirements.
- * Quantity : 500 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2~4	24.0(.945)	-	24.5(.965)	30.5(1.200)	24.5(.965)	9
5~7	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
8~14	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	5
15	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

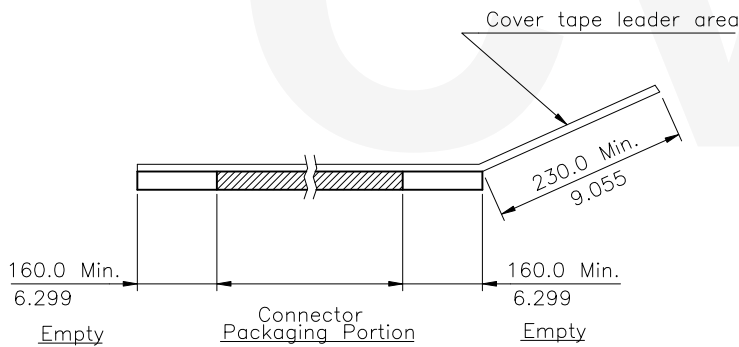

WIDTH : 24 mm Carrier

WIDTH : 32.44,56 mm Carrier

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 2.00mm PITCH TOP ENTRY SMT HEADER	MATERIAL: ACL1348		DRAWING NO. CIO123AG PART NO. CIO1**M*V*O-NH	
6	Sun	6/10-21'	ECRH121018/ECNT121139								
5	Sun	1/06-21'	ECRT120085/ECNT120316	DRAWN BY: Sun	6/11-21'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
4	Ken	4/11-18'	ECNT118070/ECRH118010	ENGINEER: Sun	6/11-21'	.X ±	X' ± I'				
3	Enya	3/5-13'	ECN13056-0/ECR13007-1	CHECKED BY: David	6/11-21'	.XX ±	.X' ±				
				APPROVED BY: David	6/11-21'	.XXX ±	.XX' ±			SCALE SHEET 2 OF 2	

CIVILUX
 2021.06.17
 ISSUED

瀚荃股份有限公司
 CviLux Corporation