




Power Chip Shielded Inductors PCS124

Dimensions: $\frac{\text{Inches}}{\text{(mm)}}$

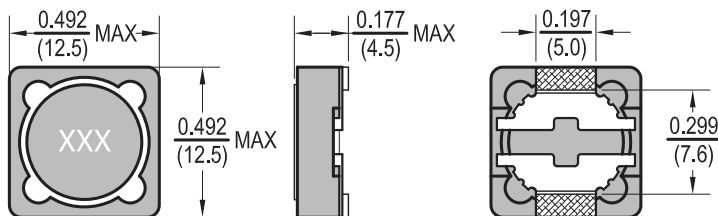

Allied Part Number	Inductance (±h)	Tolerance (%)	Test Freq. KHz, 1V	DCR Max. (Ω)	IDC (A)
PCS124-3R3M-RC	3.3	20	100	0.015	6.5
PCS124-3R9M-RC	3.9	20	100	0.015	6.5
PCS124-4R7M-RC	4.7	20	100	0.018	5.7
PCS124-6R8M-RC	6.8	20	100	0.023	4.9
PCS124-100M-RC	10	20	100	0.028	4.5
PCS124-120M-RC	12	20	100	0.038	4.0
PCS124-150M-RC	15	20	100	0.050	3.2
PCS124-180M-RC	18	20	100	0.057	3.1
PCS124-220M-RC	22	20	100	0.066	2.9
PCS124-270M-RC	27	20	100	0.080	2.8
PCS124-330M-RC	33	20	100	0.097	2.7
PCS124-390M-RC	39	20	100	0.132	2.1
PCS124-470M-RC	47	20	100	0.150	1.9
PCS124-560M-RC	56	20	100	0.190	1.8
PCS124-680M-RC	68	20	100	0.220	1.5
PCS124-820M-RC	82	20	100	0.260	1.3
PCS124-101M-RC	100	20	100	0.308	1.2
PCS124-121M-RC	120	20	100	0.380	1.1
PCS124-151M-RC	150	20	100	0.530	.95
PCS124-181M-RC	180	20	100	0.650	.85
PCS124-221M-RC	220	20	100	0.700	.80
PCS124-271M-RC	270	20	100	0.876	.60
PCS124-331M-RC	330	20	100	0.990	.50

All specifications subject to change without notice.

Features

- Magnetically Shielded
- Low DCR Resistance
- High Energy Storage
- Low Energy Loss
- Suitable for pick and place

Electrical

Inductance Range: 3.3μh to 330μh

Tolerance: 20% Across entire range

Test Frequency: 100Khz, 1V

Operating Temp: -40°C ~ +100°C

Rated Current: Inductance drop 35% Typical

Resistance to Soldering Heat

Pre-Heat 150°C, 1 min.

Solder Temp: 260°C ± 5°C

Solder Composition: Sn/Ag3.0/Cu0.5

Immersion Time: 10 sec. ± 1 sec.

Test Equipment

(L): HP 4192A LF Impedance Analyzer

(RDC): Chen Hwa 502

(IDA): Chen Hwa 1061 + Chen Hwa 301A or HP4284A + HP42841A

Physical

Packaging: 500 pieces per 13 inch reel

Marking: EIA Inductance Code