


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		N1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
2 AWG SOLID OR STRANDED	2 AWG STRANDED	2 AWG SOLID OR STRANDED

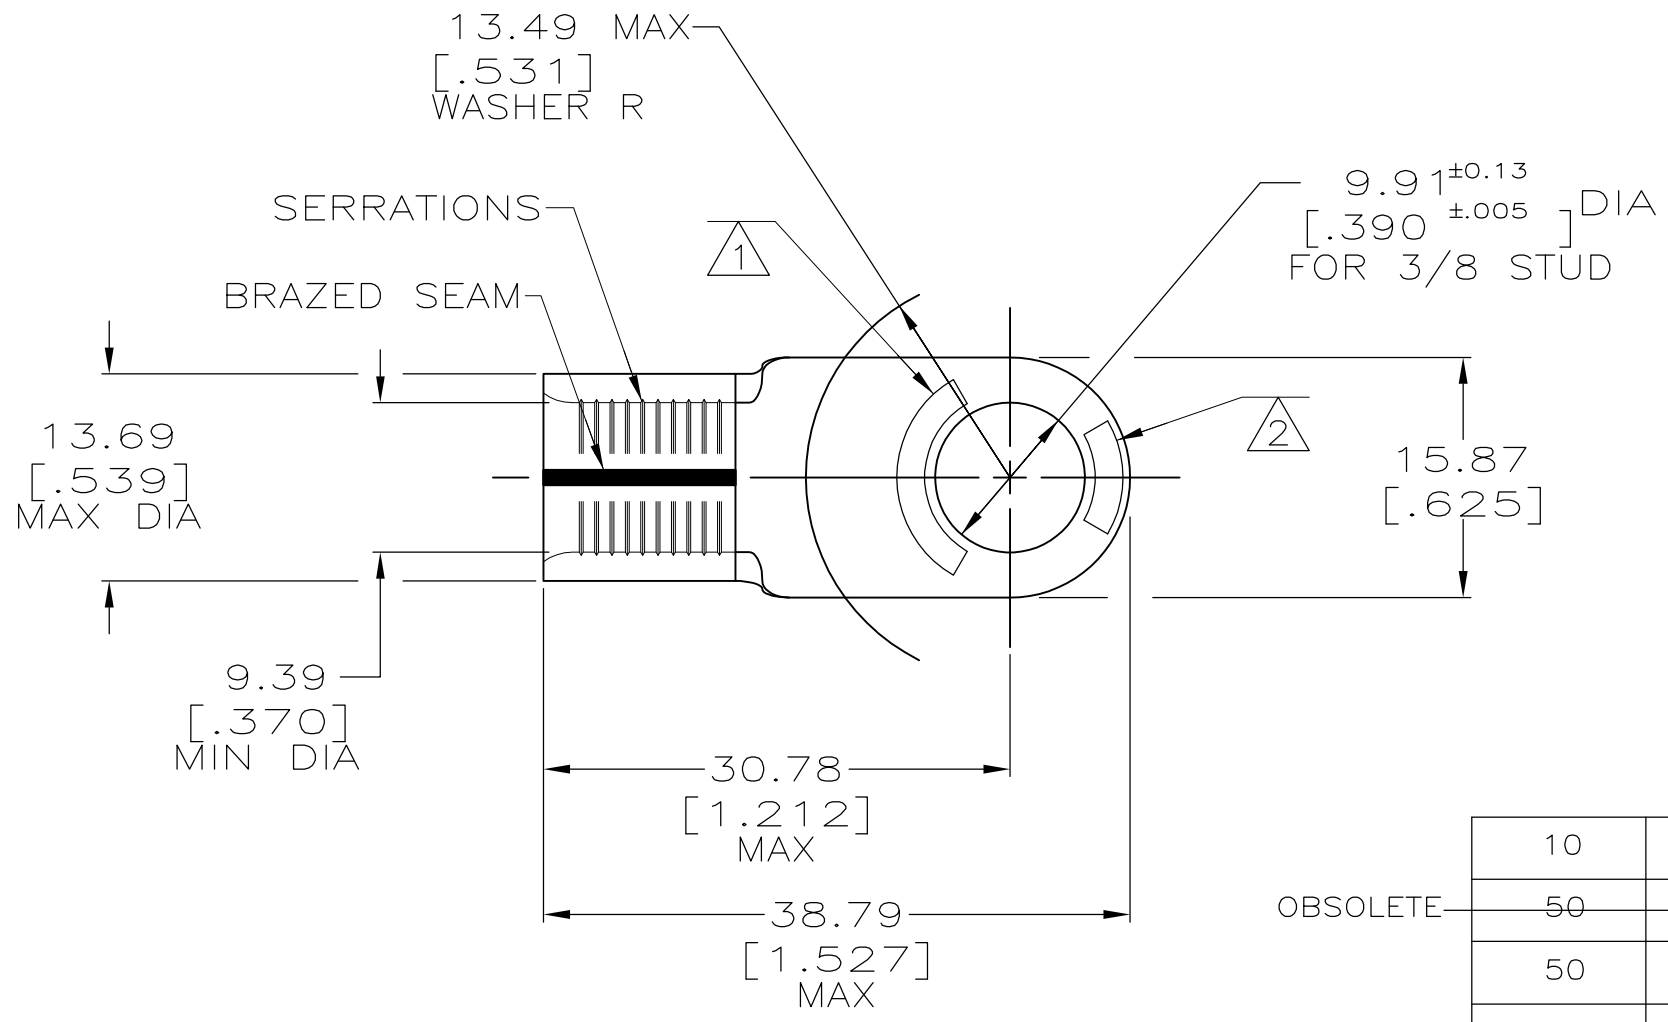

- 1 STAMP AMP 2W* APPROX AS SHOWN
- 2 STAMP 60-75 APPROX AS SHOWN
- 3 MATERIAL THK: 1.78 ± 0.08 [.070 ± 0.003]
- 4 TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B-545
- 5 GOLD PLATE 0.00127 [.000050] MIN THK PER ASTM B-488, TYPE 2, GRADE C, OVER NICKEL PL. 0.00076 [.000030] MIN THK PER QQ-N-290
- 6 MEETS MS20659-114, CLASS 2
- 7 SUPERSEDED BY P/N 321600

OBSOLETE

QTY	PACKAGE TYPE	MILITARY	FINISH	PART NO
10	LOOSE PIECE, BAG	--	4	8-321600-5
50	LOOSE PIECE, BOX	--	4	8-321600-2
50	LOOSE PIECE	--	5	2-321600-1
50	LOOSE PIECE	6	4	321600

CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170° C
VOLTAGE RATING: N/A
CIRCULAR MIL AREA: 26.7-42.4mm² [52,600-83,700] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± 0.20[.008]
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL COPPER ASTM B-152	FINISH SEE TABLE

DWN DK SCHRUM	5/25/93
CHK RD HEIM	1/27/94
APVD J MECKLEY	1/27/94
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	-

TE Connectivity			
NAME TERMINAL, RING TONGUE, SOLISTRAND			
SIZE A3	CAGE CODE 00779	DRAWING NO C-321600	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1
		REV N1	