


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POST PLATING: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST.
- 5 HOUSING: LCP, COLOR-BLACK.
- 6 POST MATERIAL: COPPER ALLOY.
- 7 PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATION.

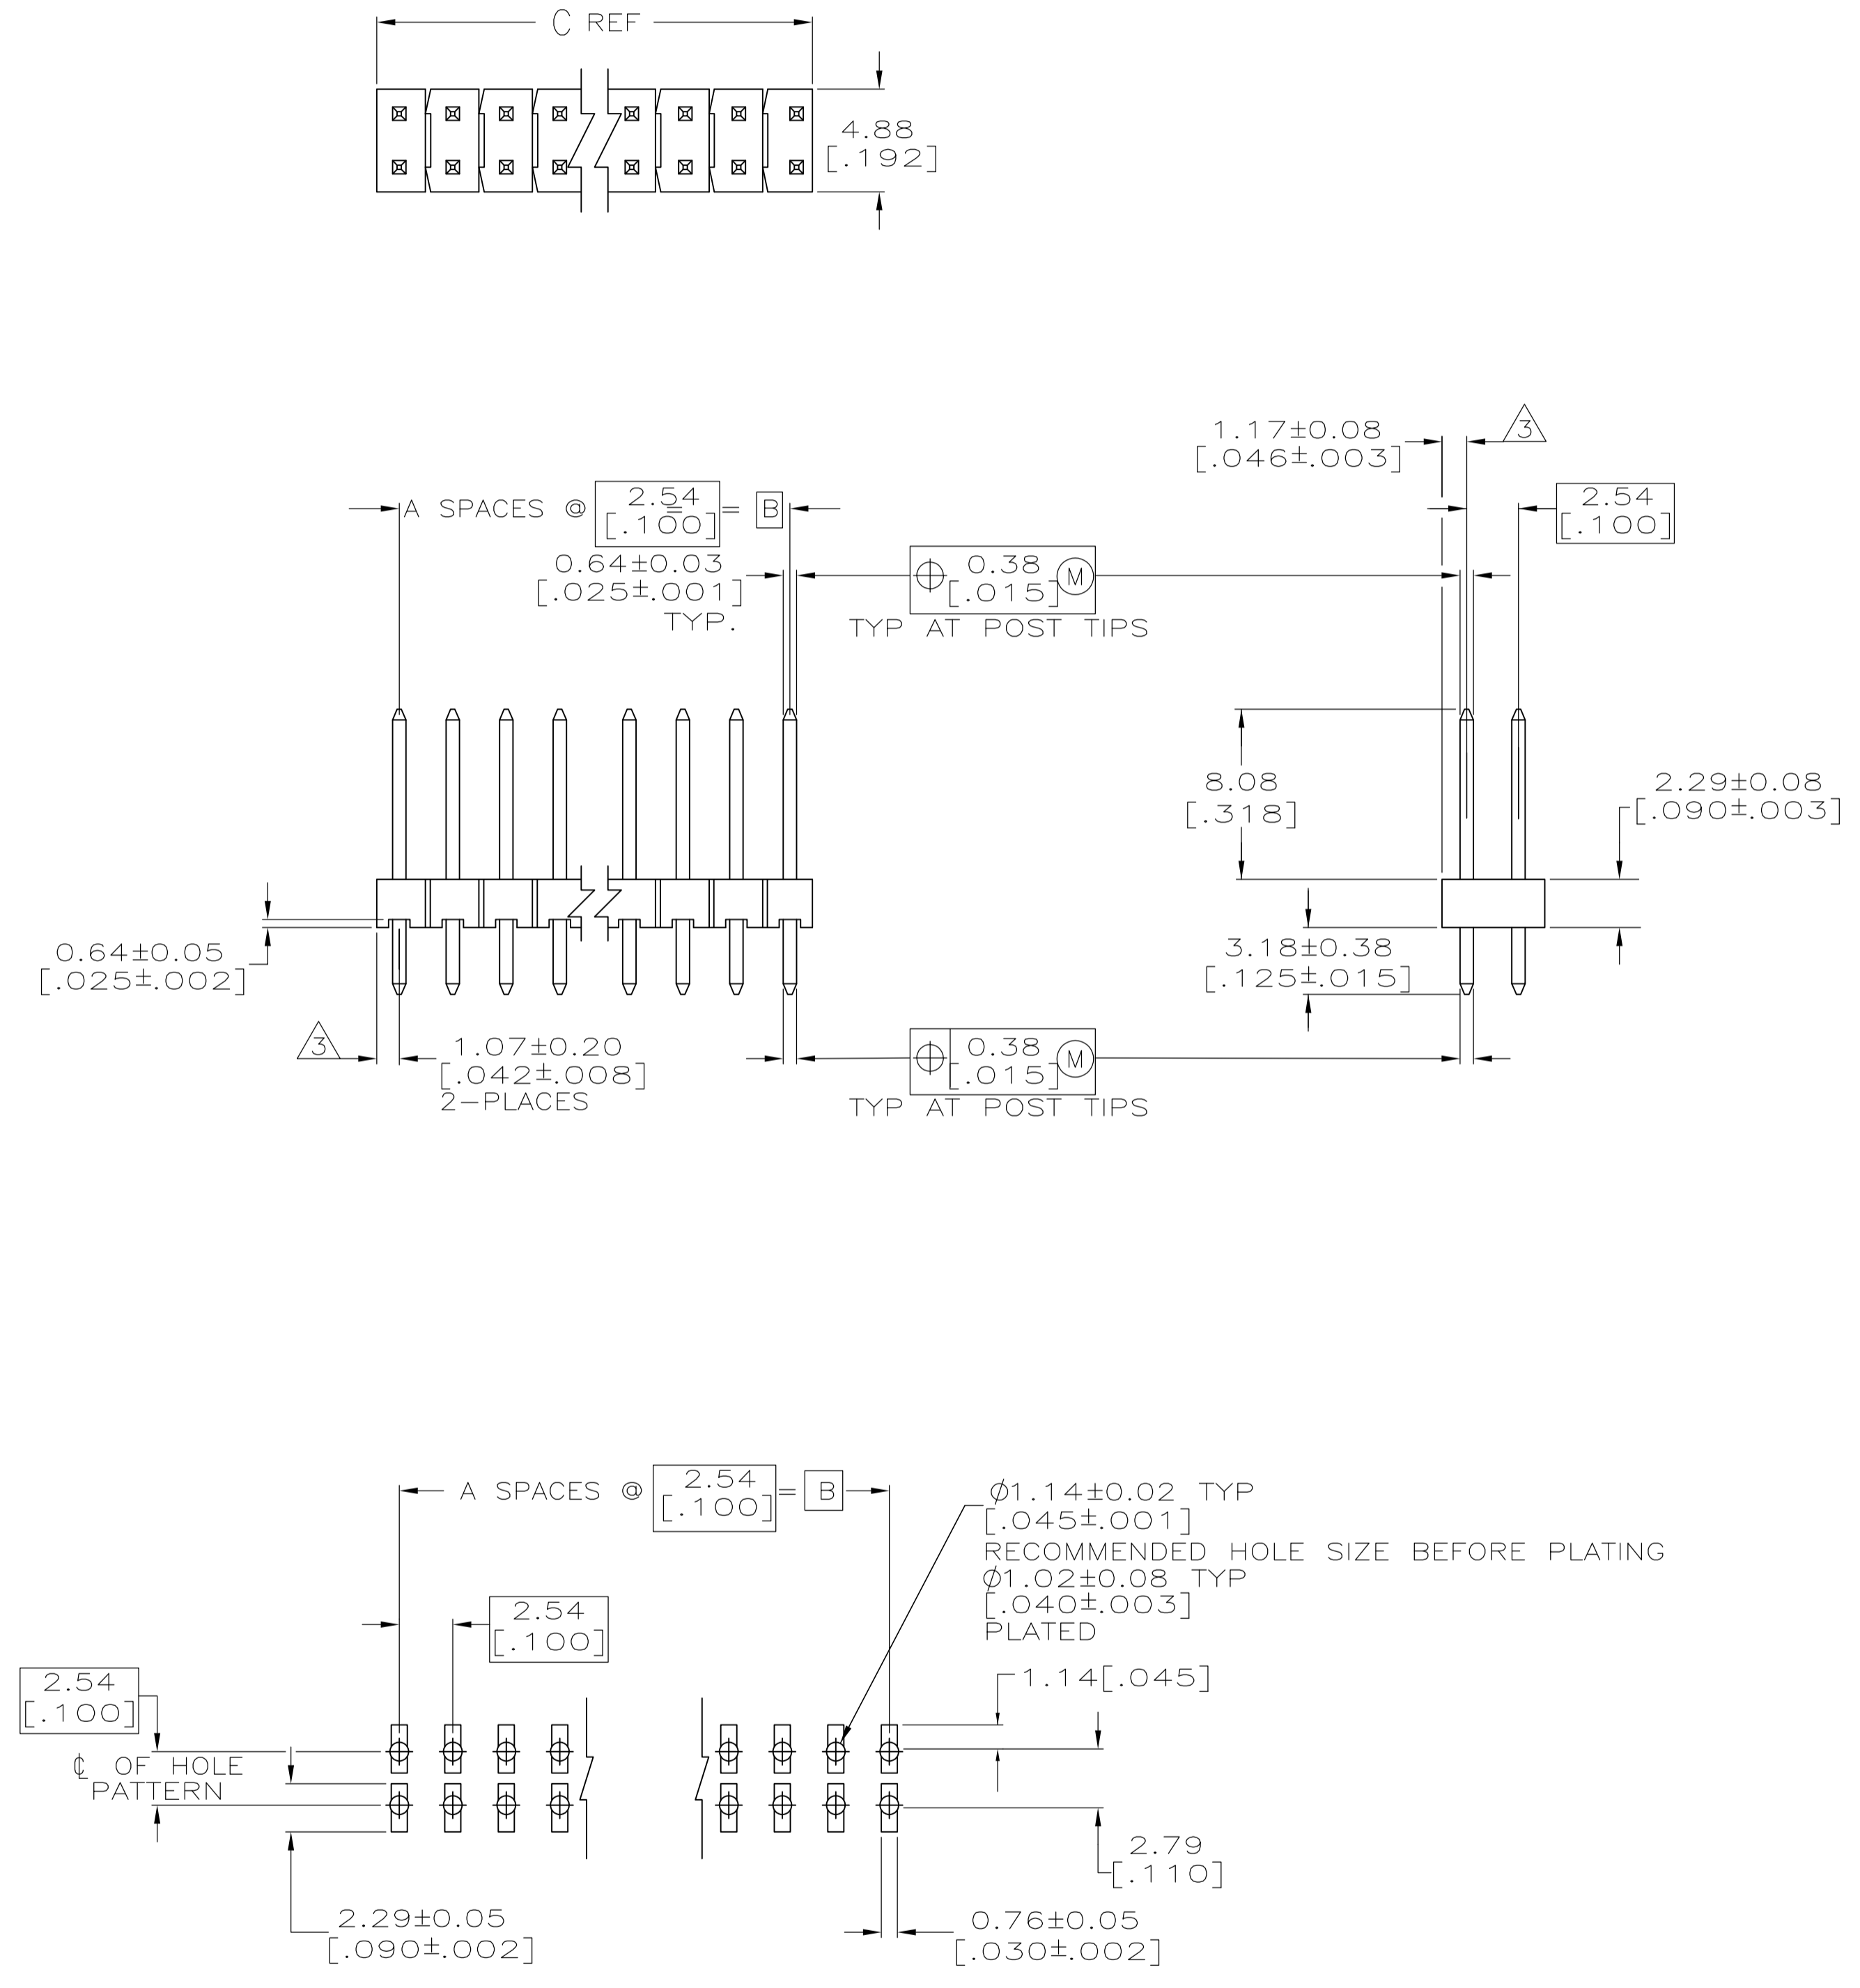

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

44mm	9.75 [.384]	7.62 [.300]	3	8	1571229-1
TAPE WIDTH	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN R BROWN 01FEB02	 TE Connectivity	
DIMENSIONS: mm		CHK J GESFORD 01FEB02		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J GESFORD 01FEB02	NAME	
0 PLC ± -		PRODUCT SPEC	HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE PACKAGED IN TAPE AND REEL	
1 PLC ± -		APPLICATION SPEC	SIZE	
2 PLC ± 0.51[.02]			CAGE CODE	
3 PLC ± 0.12[.005]			DRAWING NO	
4 PLC ± 0.012[.0005]			RESTRICTED TO	
ANGLES ± -			WEIGHT	
FINISH			A1 00779 C=1571229	
			CUSTOMER DRAWING	
			SCALE	SHEET
			4:1	1 OF 1
				REV C