
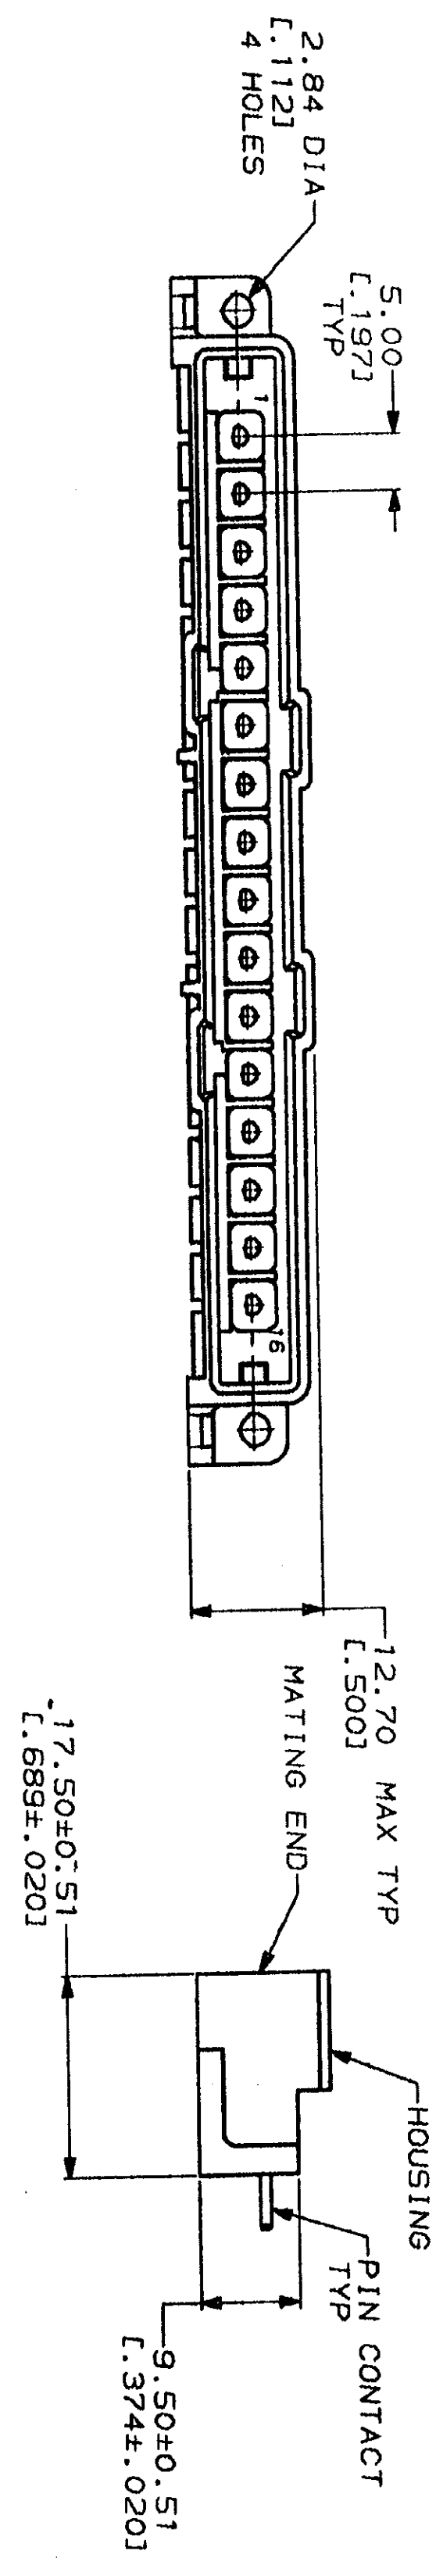
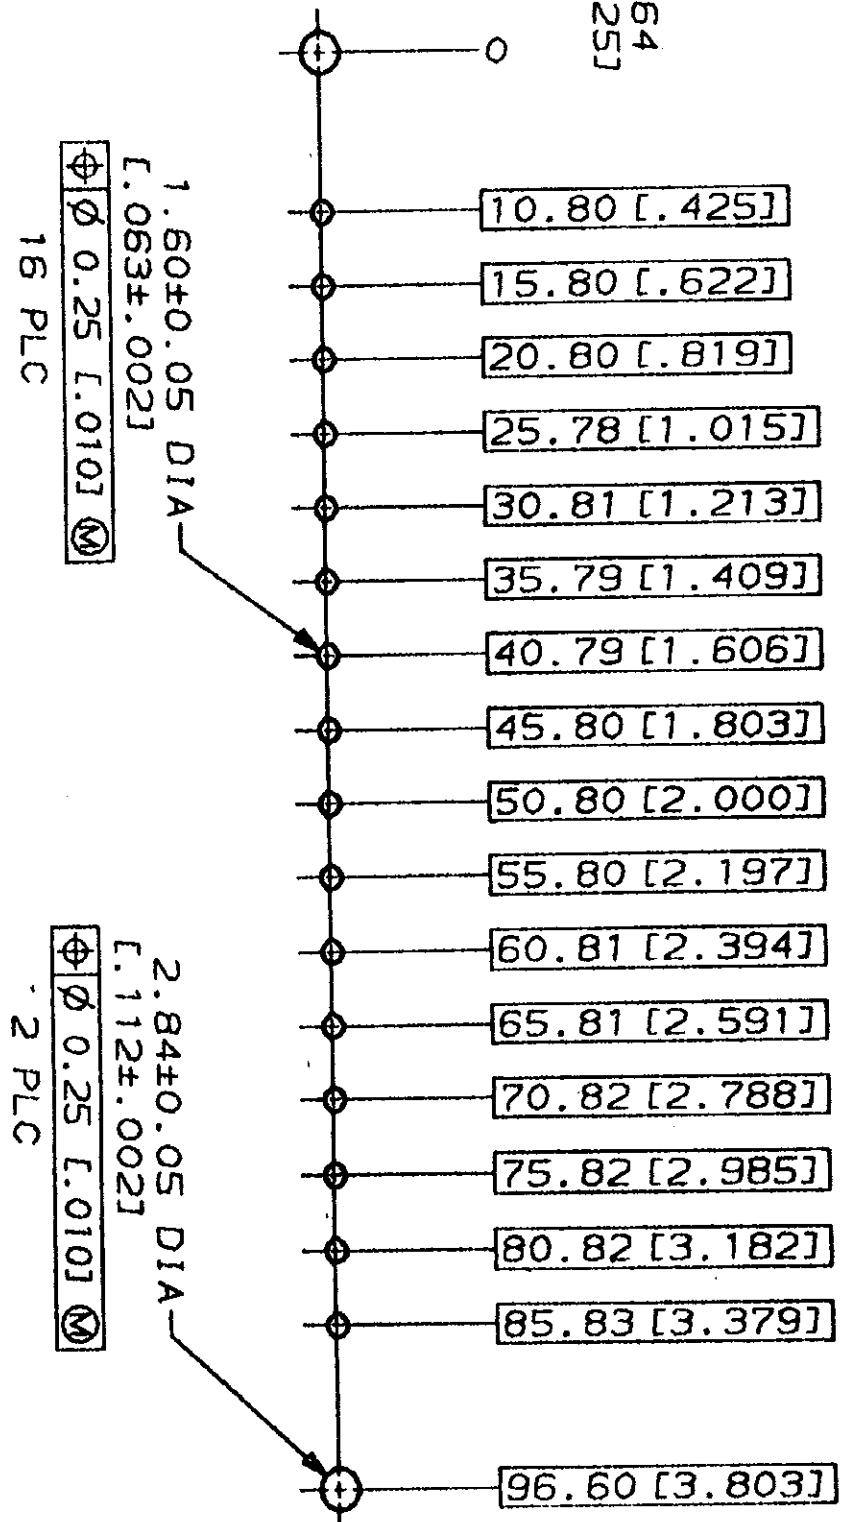


NO.	REV.	DATE	DESCRIPTION
1	BD 37	07/21/92	REDRAWN WITHOUT CHANGE

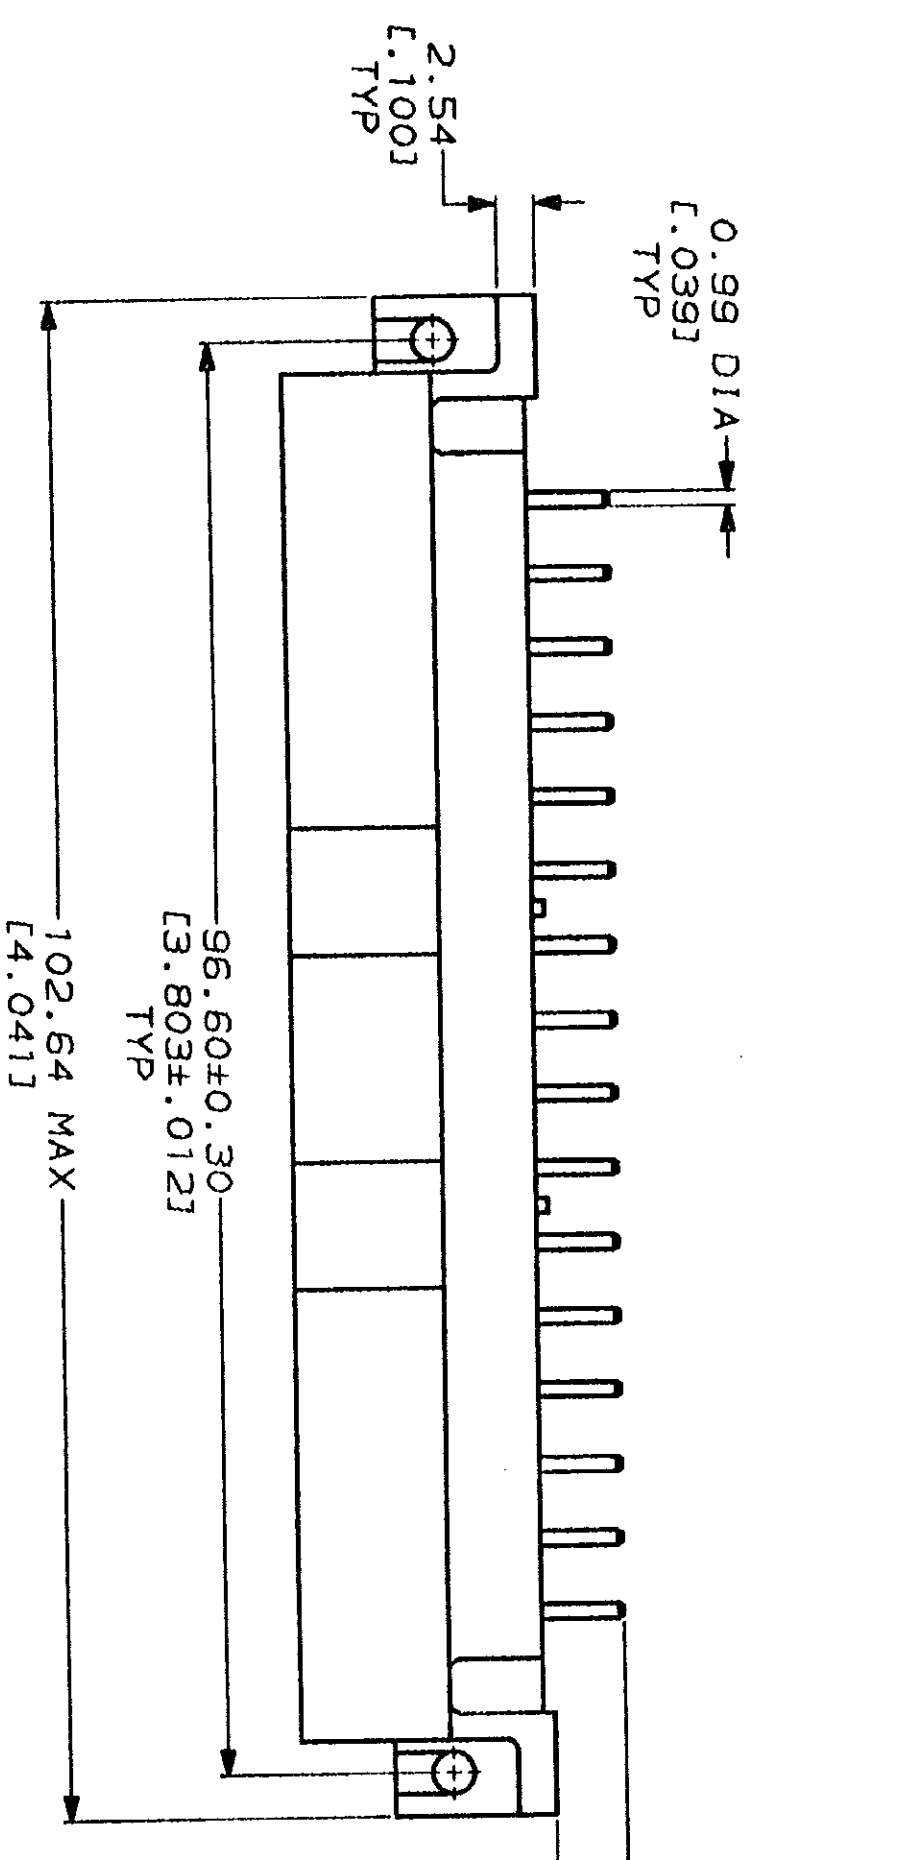

- 1 NYLON, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81µm [0.000150] MIN TIN-LEAD OVER 2.54µm [0.000100] MIN COPPER OR 1.27µm [0.000050] MIN NICKEL.
- 4 0.76µm [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] MIN FROM MATING END, 3.81µm [0.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [0.211] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.

DO NOT SCALE PRINT.		DR 07/21/92	
DIMENSIONS SPECIFIED IN mm (INCHES)		L. SIPE	
TOLERANCES IN mm (INCHES)		CHK 7-24-92	
1 FRACTIONAL DECIMAL ± 0.25 (0.010)		R. STONE	
2 DECIMAL ± 0.25 (0.010)		APPD 7-24-92	
3 DECIMAL ± 0.25 (0.010)		A. TRAVIS	
MATERIAL		APPD 7-24-92	
HOUSING: Δ		C. RONDE	
CONTACTS: Δ		PRODUCT SPEC	
FINISH		APPLICATION SPEC	
CONTACTS: SEE TABLE		WEIGHT	
AMP INCORPORATED		SCALE 4:1	
Harrisburg, PA 17106-3606		SIZE CASE CODE	
AMP		00779	
PIN HEADER ASSEMBLY, 16 POSN, IN-LINE, SMALL METRIC CONNECTOR, METRIMATE		DRAWING NO	
		C-207599	
		SHEET 1 OF 1	
		CUSTOMER DRAWING	

FINISH	207599-3
PART NO	207599-1