

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Emergency stop switch in IP65 housing, in conjunction with appropriate evaluation unit suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061), surface installation, 5-pos. M12 connection

Product description

Phoenix Contact emergency stop switches are electromechanical switching devices with a safety function. They are used to safely shut down or stop machines and systems in order to prevent or minimize personal injury and property damage. The portfolio includes a modular system as well as a preconfigured solution. The preconfigured emergency stop switch is ready for immediate use and is connected via a 5-position M12 male connector. Thanks to the robust design, the emergency stop switches can be used flexibly and can be integrated directly into the machine.

Your advantages

- IP65 degree of protection allows mounting directly in the machine
- Reduction of wiring errors with uniform 5-position M12 connection
- Rapid on-site diagnostics with color-coded switching position indicator
- In applications with appropriate evaluation device suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Commercial data

Item number	1221735
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN04
Product key	DNA622
GTIN	4063151311100
Weight per piece (including packing)	223.3 g
Weight per piece (excluding packing)	180.3 g
Customs tariff number	85365080
Country of origin	DE

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Technical data

Product properties

Product type	Emergency stop switch
--------------	-----------------------


Insulation characteristics

Overvoltage category	III (applies to the installed contact module)
Pollution degree	3 (applies to the installed contact module)

Electrical properties

Rated surge voltage	1.5 kV
---------------------	--------

Dimensions

Dimensional drawing	
Width	72 mm
Height	72 mm
Depth	110 mm

Material specifications

Flammability rating according to UL 94	V2 (Actuator)
	V0 (Contact element)
	V2 (Housing)
	UR (M12 plug UR-approved)
Housing material	PA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Maximum altitude	max. 2000 m (Above sea level)
Shock	15g / 11 ms, in accordance with IEC 60068-2-27
Vibration (operation)	10 Hz ... 500 Hz, 0.35 mm amplitude, 5g, in accordance with IEC 60068-2-6

Mounting

Mounting type	Surface installation
---------------	----------------------

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Assembly instructions	Mounting hole: Ø 4.2 mm
Mounting position	any
Connection method	M12 connector (A-coded)

PSR-ESS-M2-H110-2000-A - Emergency stop switch




1221735

<https://www.phoenixcontact.com/us/products/1221735>

Drawings

Dimensional drawing

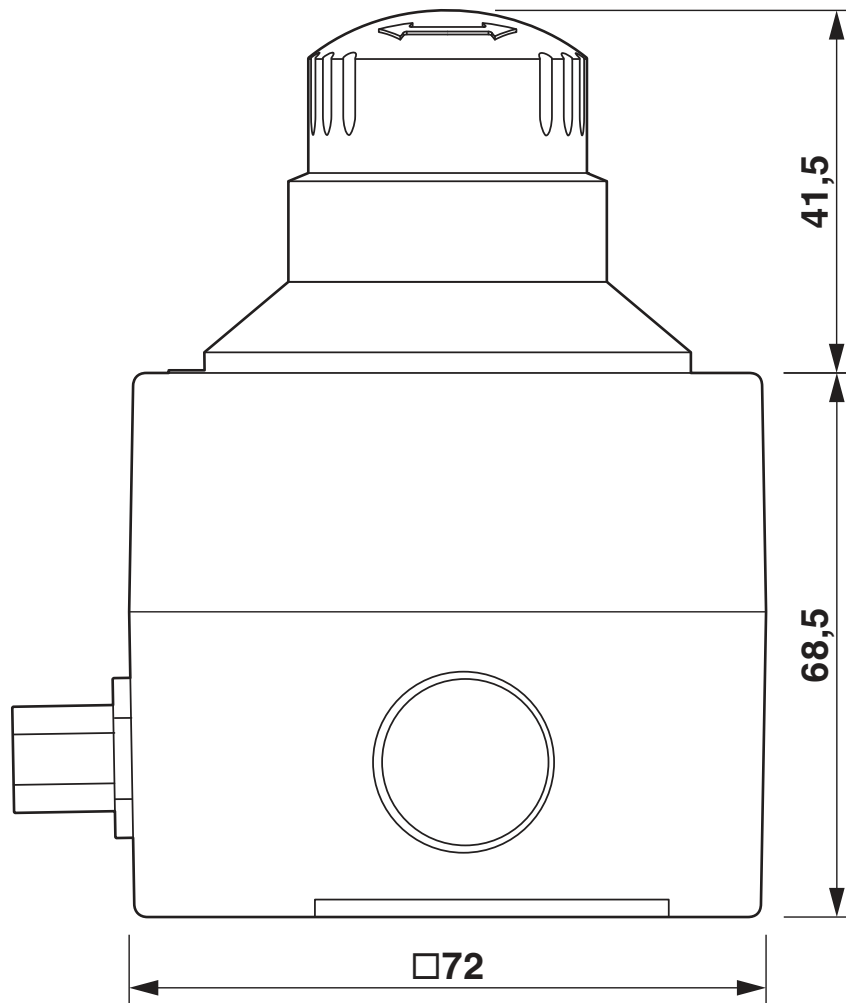

Dimensions (in mm)

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Classifications

ECLASS

ECLASS-11.0	27371216
ECLASS-13.0	27371216
ECLASS-12.0	27371216

ETIM

ETIM 8.0	EC000225
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com