


PACKAGE: INDIVIDUAL PE BAG.
4P4C 50U"

500g Weight

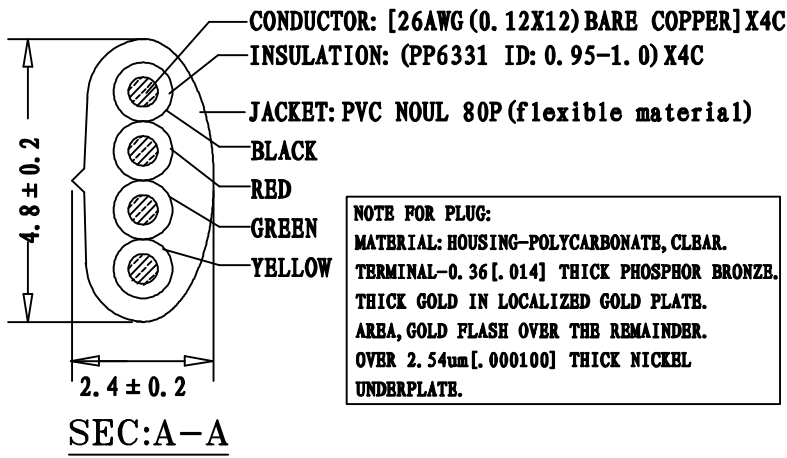

CONDUCTOR: [26AWG (0.12X12) BARE COPPER] X4C

INSULATION: (PP6331 ID: 0.95-1.0) X4C

JACKET: PVC NOUL 80P (flexible material)

BLACK

RED

GREEN

YELLOW

NOTE FOR PLUG:

MATERIAL: HOUSING-POLYCARBONATE, CLEAR.

TERMINAL-0.36 [0.014] THICK PHOSPHOR BRONZE.

THICK GOLD IN LOCALIZED GOLD PLATE.

AREA, GOLD FLASH OVER THE REMAINDER.

OVER 2.54um [0.000100] THICK NICKEL

UNDERPLATE.

TERMINATION:

P1	COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

PART NO	DRAWING NO	BUYER COLOR	VENDOR COLOR	RETRACTED LENGTH ("L3")	CUSTOMER Accepted ("L2")	CUT LENGTH "L1"
523-26-4400-BL-0005F	A	Black	BLACK LIGHT	330 ± 30	5.0FT-5.75FT	2300-2400
523-26-4400-BL-0007F	B	Black	BLACK LIGHT	470 ± 30	7.0FT-8.05FT	3000-3200
523-26-4400-BL-0010F	C	Black	BLACK LIGHT	630 ± 50	10.0FT-11.5FT	4300-4500
523-26-4400-BL-0012F	D	Black	BLACK LIGHT	800 ± 50	12.0FT-13.8FT	5200-5400
523-26-4400-BL-0014F	E	Black	BLACK LIGHT	850 ± 50	14.0FT-16.1FT	5800-6000
523-26-4400-BL-0025F	F	Black	BLACK LIGHT	1900 ± 50	25.0FT-28.75FT	10800-11000

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC	
Industrial Cable and Connector Technology	
IDRAWING NO: 671-335	CUSTOMER: L-671
ITEM NO: 4C COILD CORD P+0 PLUG	UNIT: mm
DATE: 2012-02-20	ISSUE: (A/0)
DRAWN: _____	QA: _____
SALES DEPT: _____	SALES MANAGER: _____