
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION										
REV	DESCRIPTION	DATE	APPROVED							
A	INITIAL RELEASE	06/09/03	BS							
В	REDRAW DRW, RFS. 9770, GC	11/16/06	BS							
C	REDRAW DRW, RFS. 14633, SO	09/23/08	BS							

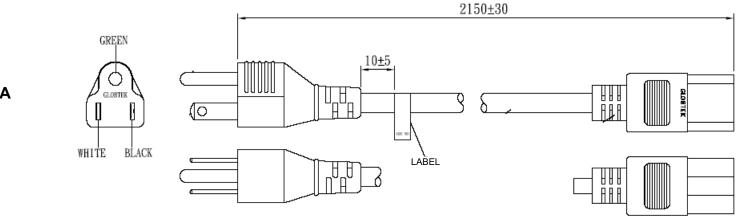

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC CABLE TYPE / SIZE: **SVT. 18 AWG X 3**

TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

2150 ± 30 mm OVERALL LENGTH (L): CABLE OUTER DIAMETER: $6.3 \pm 0.1 \, \text{mm}$ END 'A' TERMINATION: **NEMA 5-15P** IEC 320 / C13 END 'B' TERMINATION: APPROVALS PLUG: UL. CSA or cUL APPROVALS CABLE: UL, CSA or cUL APPROVALS CONNECTOR: UL. CSA or cUL

NOTES:

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Contents of this document are subject to change withou prior notice

Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Globtek product are not authorized for use as


mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

PACKING:

HANKING

L = 150 <u>+</u> 10 mm

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.





В

DASH NO.	P	ART NO	REV.	DESCRIPTION						NOTES		
TABULATION BLOCK												
			.xx +/- 0.1 +/- 1° .xxx +/005		ANGULAR +/- 1°	(lobTek [®] , Inc. ww.globtek.com	186 Veterans Dr. No Tel. 201-784-1000			
INIT.BY:	DIMIK .	DATE: 06/09/03	.xx +/=	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1* .xxx +/013			DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET					
DRAWN:	INF	DATE: 06/09/03	FSCN I G, CC	No.:	SIZE A	MODEL:		N / A		REV. C		
APRVD:	DO .	DATE: 06/09/03	SCALE: NONE		PART N	Э:	3021457F701-Y(R)	SHEET 1/1			