
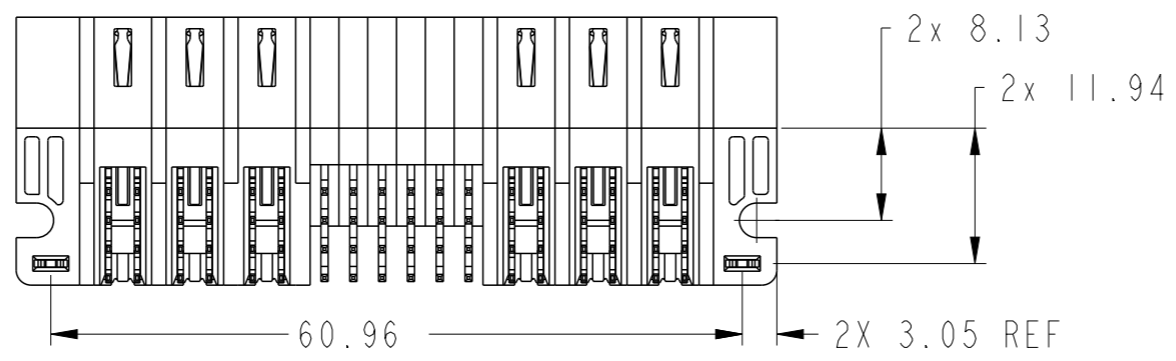
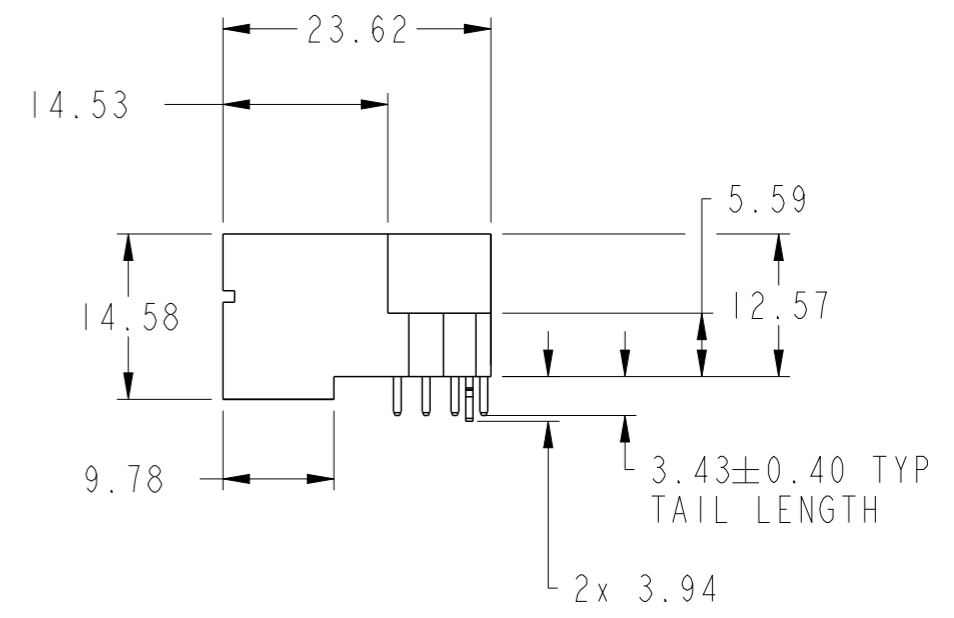
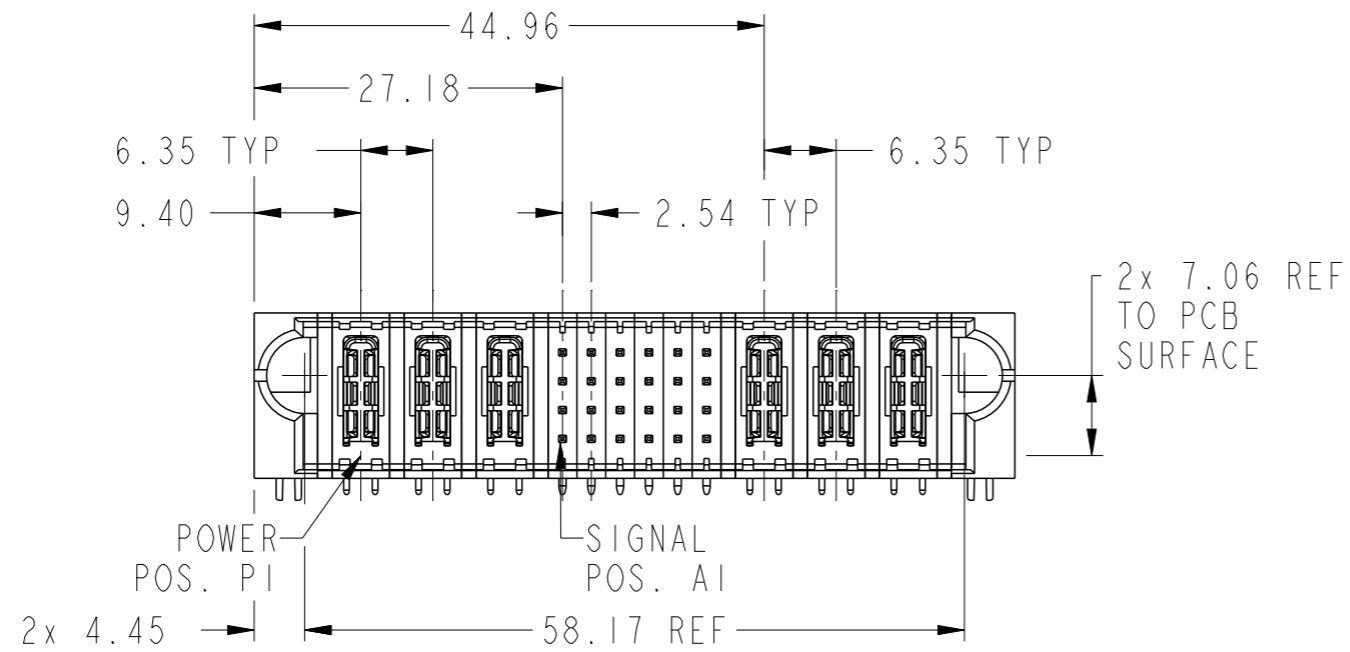



PRODUCT NUMBER SEE SHEET 2

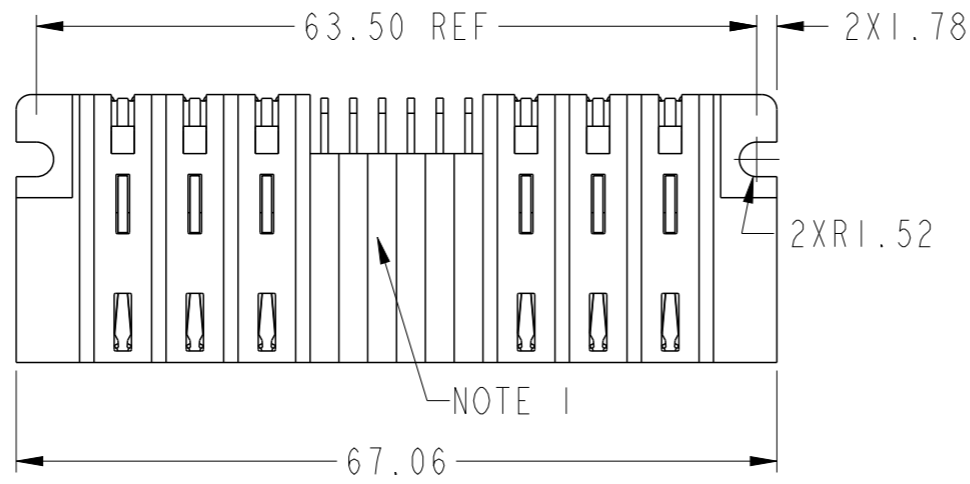

Copyright FCI.

spec ref	*	dr	Rainbow Zhan	2015/06/30	projection	MM	size	A3	scale	3:2															
tolerance std	ASME Y14.5	eng	Zhen-Hua Liu	2015/07/02			ecn no	-	rel level	Released															
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/07/02			product family	PwrBlade+	rel level	Released															
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2015/07/02	product family	PwrBlade+	rel level	Released					
linear	0.X	±0.5																							
	0.XX	±0.25																							
	0.XXX	±0.10																							
angular	0°	±2°																							
ASME Y14.5	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°			<table border="1"> <tr> <td>part no</td> <td>3HP + 24S + 3HP</td> </tr> <tr> <td>cat. no.</td> <td>RA STB HEADER</td> </tr> </table>	part no	3HP + 24S + 3HP	cat. no.	RA STB HEADER	<table border="1"> <tr> <td>dwg no</td> <td>10106132-6006003</td> </tr> <tr> <td>rev</td> <td>A</td> </tr> </table>	dwg no	10106132-6006003	rev	A
linear	0.X	±0.5																							
	0.XX	±0.25																							
	0.XXX	±0.10																							
angular	0°	±2°																							
part no	3HP + 24S + 3HP																								
cat. no.	RA STB HEADER																								
dwg no	10106132-6006003																								
rev	A																								
www.fci.com						Product - Customer Drw		sheet 1 of 3																	

PRODUCT NO.	ROWS	HIGH POWER			SIGNAL						HIGH POWER			E2	
		E1	P1	P2	P3	1	2	3	4	5	6	P4	P5		P6
10106132-6006003LF	DCBA	HA	H1	H1	H1	UUUUUUUU	UUUUUUUU	UUUUUUUU	UUUUUUUU	UUUUUUUU	UUUUUUUU	H1	H1	H1	HA

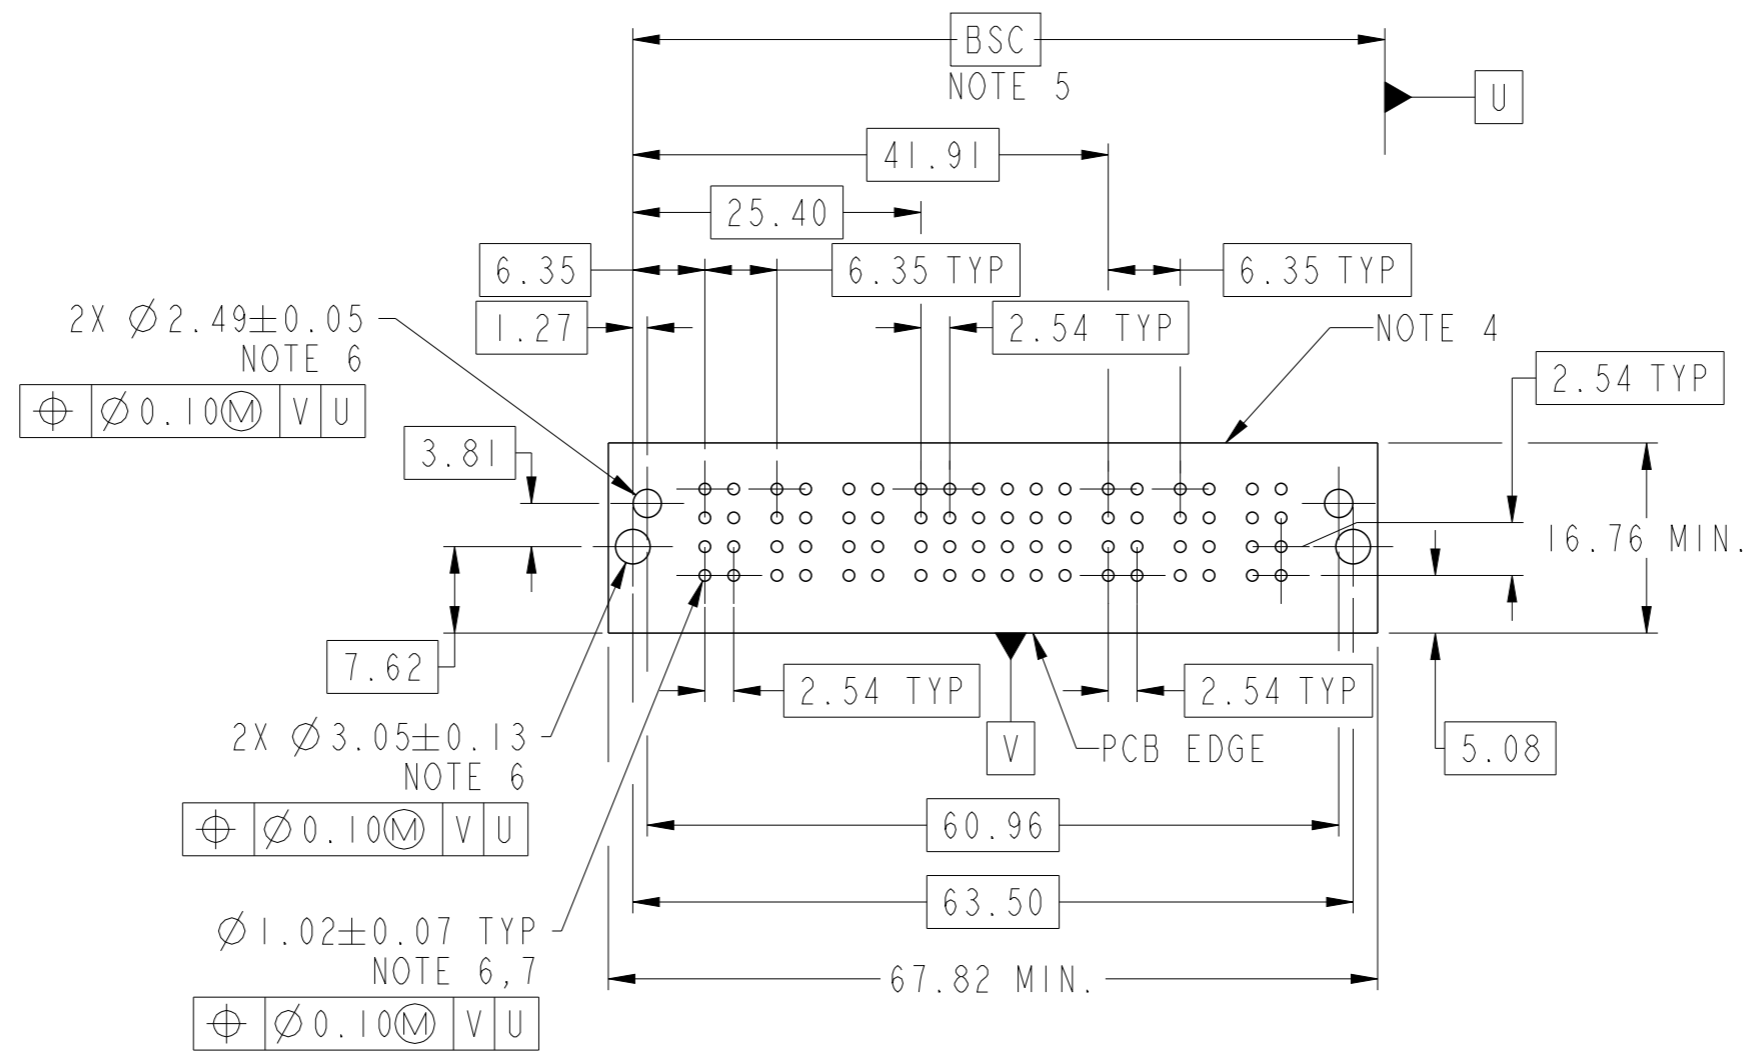

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
RL	MFBL SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Rainbow Zhan	2015/06/30	projection	MM	size	A3	scale	3:2			
eng	Zhen-Hua Liu	2015/07/02			ecn no	-	rel level	Released			
chr	Fancy Zhang	2015/07/02									
appr	Pei-Ming Zheng	2015/07/02	product family	PwrBlade+							
			3HP + 24S + 3HP			dwg no		10106132-6006003		rev	A
www.fci.com			cat. no.			Product - Customer Drw			sheet 2 of 3		




Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION : GS-12-658.  
APPLICATION SPECIFICATION : GS-20-141.  
PRODUCT PACKAGE SPECIFICATION : GS-14-1502.



Copyright FCI.

dr	Rainbow Zhan	2015/06/30	projection 	MM 	size	A3	scale	3:2
eng	Zhen-Hua Liu	2015/07/02			ecn no	-		
chr	Fancy Zhang	2015/07/02			product family	PwrBlade+	rel level	Released
appr	Pei-Ming Zheng	2015/07/02			3HP + 24S + 3HP RA STB HEADER	dwg no 10106132-6006003	rev A	
www.fci.com			cat. no.	Product - Customer Drw		sheet 3 of 3		