

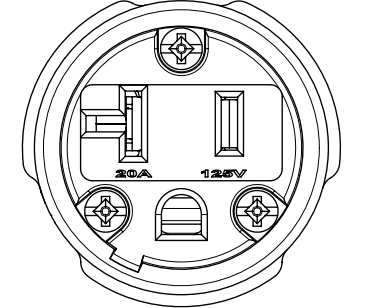


1433 AS SHOWN

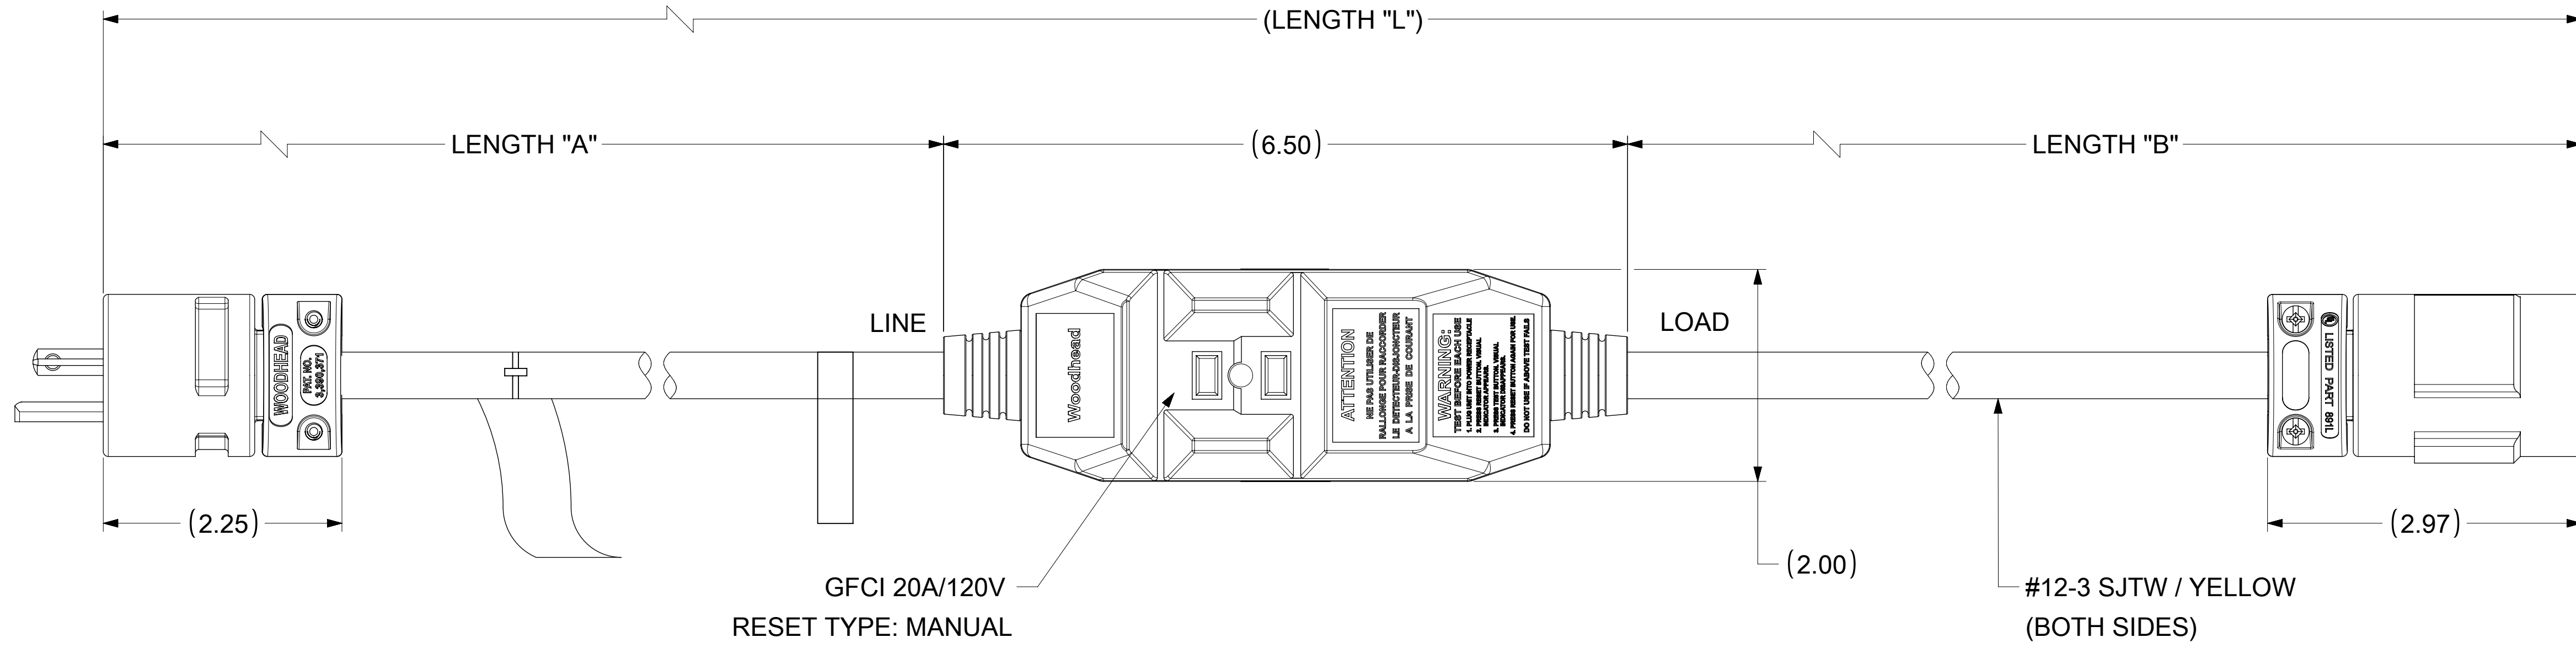

1533 AS SHOWN

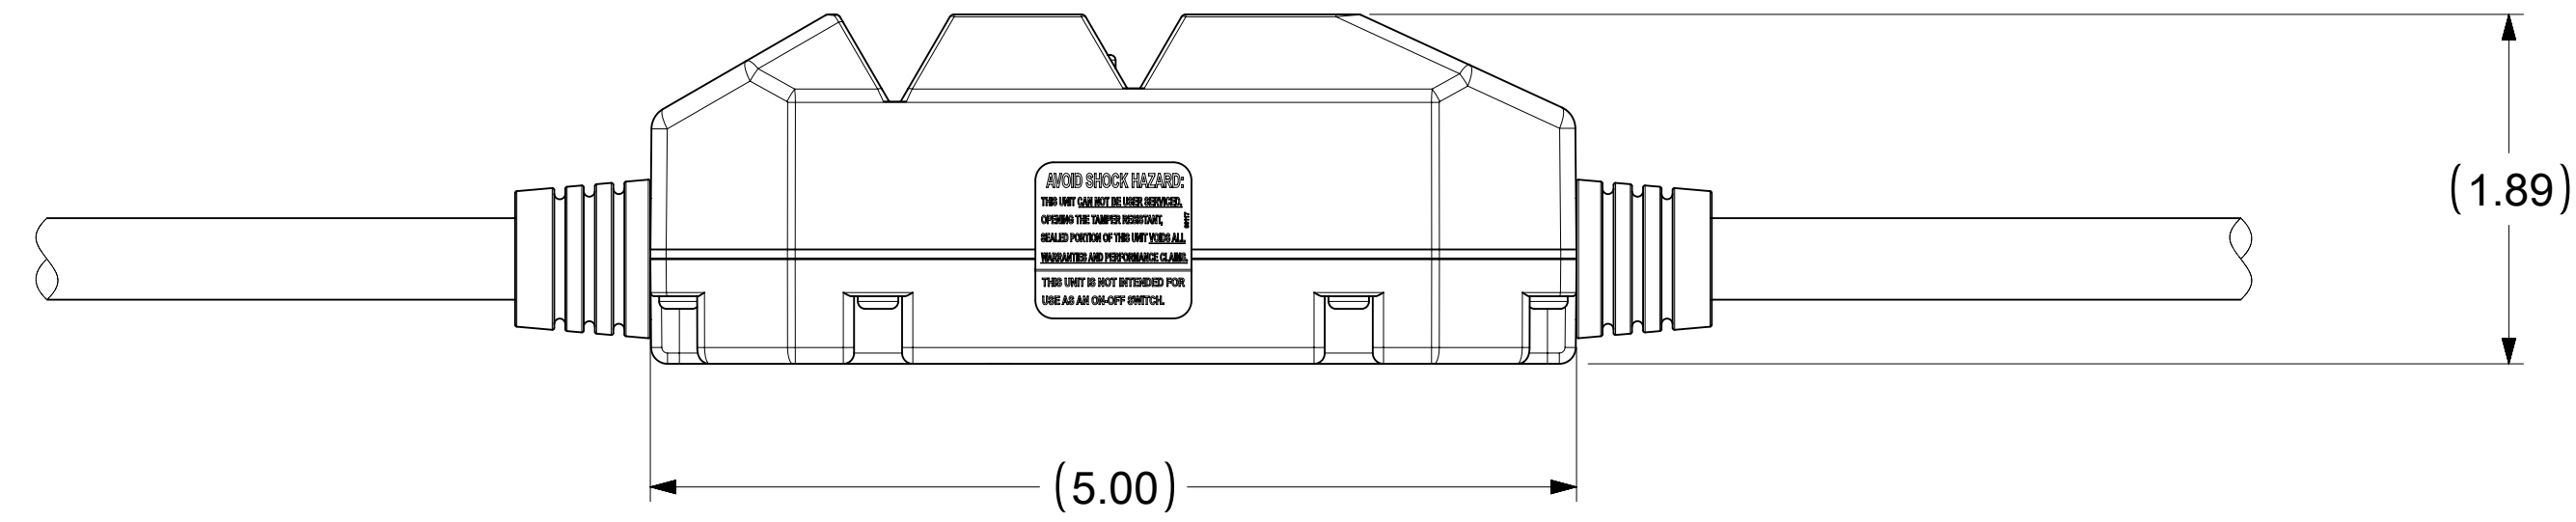

TECHNICAL

LISTED: UL & CSA
 RATED SUPPLY VOLTAGE: 120VAC
 RATED CURRENT: UP TO 20 AMPS
 RESET TYPE: MANUAL
 OPERATING FREQUENCY: 60 Hz
 TYPE: CLASS A
 GROUND TRIP CURRENT: 4-6 mA
 OVERLOAD CURRENT: 120 AMP 125 VAC
 INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
 ENDURANCE OPERATIONS: 3000 OPERATIONS
 GFCI ENCLOSURE: NEMA 3R

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH "A"	LENGTH "B"	LENGTH "L"	PLUG	CONNECTOR
1301530259	20051-50	1 FT ± .5 IN.	49 FT ± 4 IN.	50 FT 6.5 IN ± 4.5 IN.	1433	1533

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: $F_A = 0$, $F_C = 0$, $F_D = 0$

DIMENSION UNITS: INCH
 SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED):
 ANGULAR TOL: ± °
 4 PLACES ±
 3 PLACES ±
 2 PLACES ±
 1 PLACE ±
 0 PLACES ±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING: D-SIZE
 SERIES: 130153

CURRENT REV DESC: NEW SALES DRAWINGS CREATED

EC NO: 679759
 DRWN: PPURSUTANDEL 2021/09/20
 CHK'D: PPURSUTANDEL 2021/11/22
 APPR: HKNEELAND 2021/12/06

INITIAL REVISION:
 DRWN: PPURSUTANDEL 2021/09/20
 APPR: HKNEELAND 2021/12/06

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: 1301530259
 DOC TYPE: PSD
 DOC PART: 000
 REVISION: A

MATERIAL NUMBER: SEE TABLE
 CUSTOMER: GENERAL MARKET
 SHEET NUMBER: 1 OF 1