





PRODUCT NUMBER
10126113-XYHLLF

LEAD FREE OPTION
NOTE 1, 2, 7

NO. OF POS.
SEE TABLE

PIN PLATING

BASE P/N

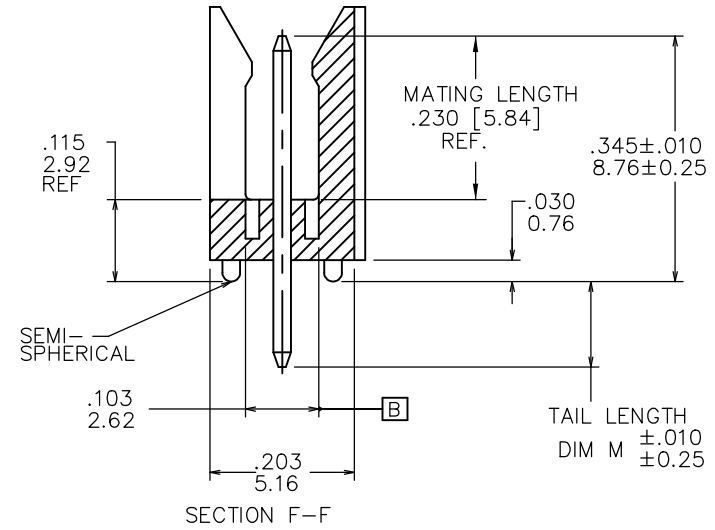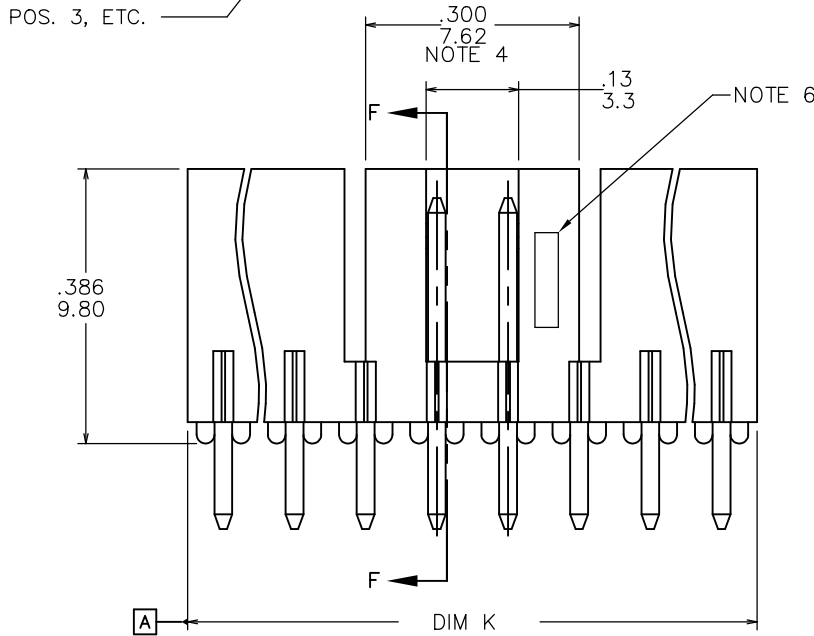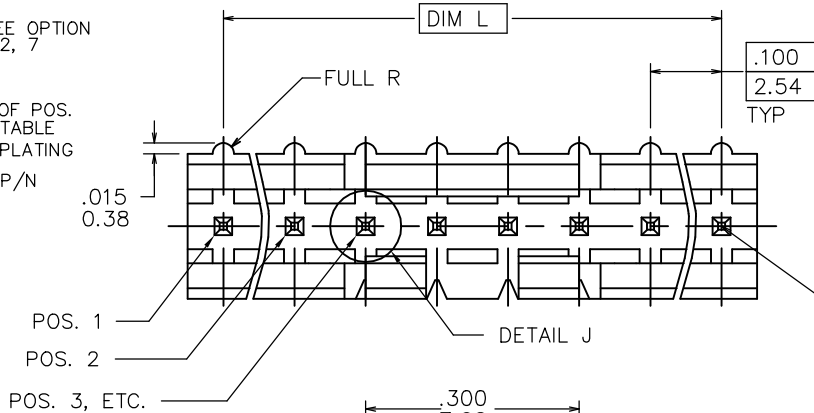

Amphenol
FCI

© 2016 AFCI

Mat'l. code NOTES 1 & 2		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family	
ltr ecn no dr date		tolerances unless otherwise specified		title		FRICION LATCH HEADER SINGLE ROW VERTICAL			
A	NEW	ZK	06/14/13	angles	linear	inch/mm			
B	ELX-N-37212	M.Z	05/29/20	0°±2°	linear	scale 1:1			
dr		ZK	HU	06/14/13	Amphenol FCI		dwg no		sheet 1 of 2
enr		ZK	HU	06/14/13			10126113		A3
chr		RICK	BIAN	06/14/13			type Product Customer Drawing		
appd		RICK	BIAN	06/14/13					
sheet	revision	B	B						
index	sheet	1	2						

PRODUCT NUMBER	NO OF POS	DIM K	DIM L	TAIL LENGTH DIM M
10126113-X03	1 X 3	.300/7.62	.200/5.08	.120/3.05
10126113-X04	1 X 4	.400/10.16	.300/7.62	.120/3.05
10126113-X05	1 X 5	.500/12.70	.400/10.16	.120/3.05
10126113-X06	1 X 6	.600/15.24	.500/12.70	.120/3.05
10126113-X07	1 X 7	.700/17.78	.600/15.24	.120/3.05
10126113-X08	1 X 8	.800/20.32	.700/17.78	.120/3.05
10126113-X09	1 X 9	.900/22.86	.800/20.32	.120/3.05
10126113-X10	1 X 10	1.000/25.40	.900/22.86	.120/3.05
10126113-X11	1 X 11	1.100/27.94	1.000/25.40	.120/3.05
10126113-X12	1 X 12	1.200/30.48	1.100/27.94	.120/3.05
10126113-X13	1 X 13	1.300/33.02	1.200/30.48	.120/3.05
10126113-X14	1 X 14	1.400/35.56	1.300/33.02	.120/3.05
10126113-X15	1 X 15	1.500/38.10	1.400/35.56	.120/3.05
10126113-X43	1 X 3	.300/7.62	.200/5.08	.190/4.83

PIN PLATING CODES	
XXXX-1YY	30u"/0.76u Au MIN. OVER 50u"/1.27u MIN Ni
XXXX-2YY	15u"/0.38u Au MIN. OVER 50u"/1.27u MIN Ni

NOTES:

1. PART NUMBER OPTIONS:

PIN PLATING CODES (SEE ABOVE)

LEAD FREE:

ADD "HLF" AT THE END OF PART NUMBER FOR LEAD FREE

2. BODY MATERIAL:

GLASS REINFORCED HTN COLOR: BLACK
 FLAME RETARDANT PER UL 94 V-0
 MAXIMUM OPERATING TEMPERATURE: 130° C
 OR
 MINERAL FILLED LCP, COLOR BLACK
 FLAME RETARDANT PER UL 94 V-0

PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.

3. PIN MATERIAL: 3/4 HARD PHOS-BRONZE.

4. NO SLOTS ON 1 X 5 POSITION OR SMALLER PRODUCT. THE CENTER KEY SLOT WILL BE ON ALL HEADERS REGARDLESS OF SIZE.

5. TWO NON-CRITICAL SIDES OF PIN TIP NOT PLATED, BOTH ENDS

6. COMPANY LOGO MAY APPEAR IN THIS AREA.

7. THESE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.



© 2016 AFCI

Mat'l. code		surface		tolerance		projection		product family	
NOTES 1 & 2		ISO 1302 ✓		ISO 1101					
ltr	ecn no	dr	date	tolerances unless otherwise specified		title			
B				angles	linear	inch/mm		FRICION LATCH HEADER SINGLE ROW VERTICAL	
				0°±2°		scale 1:1			
		dr	ZK HU	06/14/13		Amphenol FCI		dwg no sheet 2 of 2 size	
		enr	ZK HU	06/14/13				10126113 A3	
		chr	RICK BIAN	06/14/13				type Product Customer Drawing	
		appd	RICK BIAN	06/14/13					
sheet	revision								
index	sheet								