


**ENERGIZER 391/381**

**SILVER OXIDE**



**Industry Standard Dimensions**

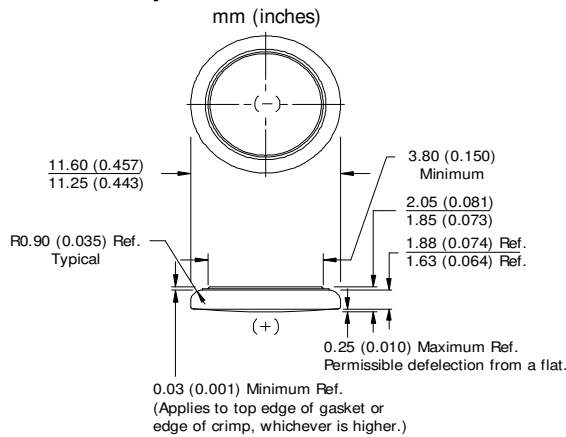


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

**Specifications**

Chemical System: Silver Oxide (Zn/Ag<sub>2</sub>O)  
Designation: IEC-SR55  
Nominal Voltage: 1.55 Volts  
Typical Capacity: 47 mAh\* (to 1.2 volts)  
Capacity Test: 15K ohm continuous drain at 21°C  
Typical Weight: 0.93 grams  
Typical Volume: 0.22 cubic centimeters  
Impedance (40 Hz): 5 to 7 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.


**Cross Section**

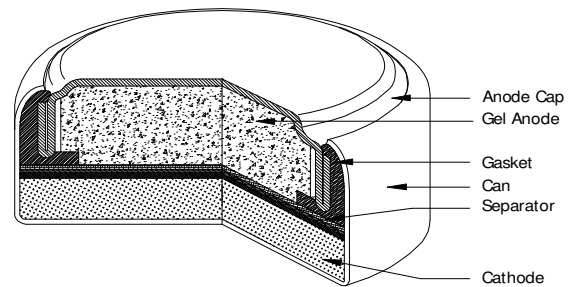

**Typical Discharge Characteristics**

Typical Performance at 21°C (70°F)

Schedule: Continuous  
Typical Drain @1.55V:  
0.103 milliamperes  
Load: 15K ohm

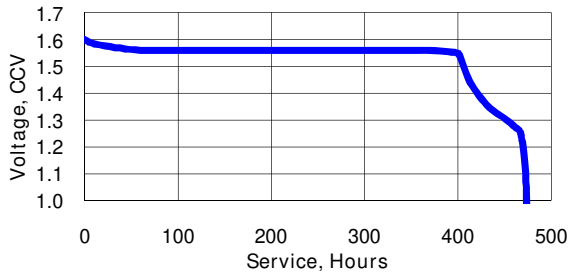


Schedule	Typical Drains at 1.55V (milliamperes)	Load (ohm)	Cutoff (hours)
Continuous	0.103	15K	456


**Temperature Characteristics**

Typical Performance at Low Discharge Rates

**Service Effects**

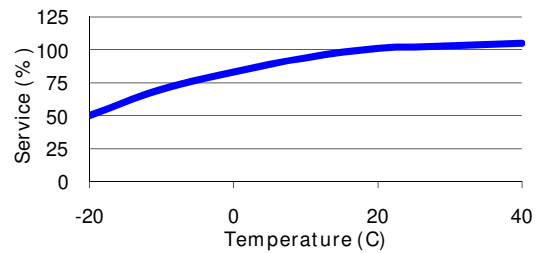

**Storage Effects**

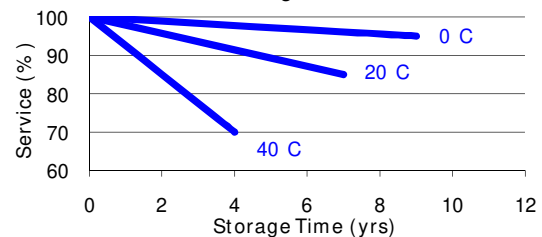

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.