


HC-B 24-TMZ-76/O1STM32G

Order No.: 1584596

The illustration shows a product version with lateral conductor exit

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1584596>HEAVYCON sleeve housing B24, with main latch, height 76 mm, with
1 x M32 thread, straight conductor outlet

Commercial data

GTIN (EAN)	 4 046356 145848
sales group	D002
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 502 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
08/02/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data

Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	76 mm
Width	43 mm
Length	120 mm

Housing type	Sleeve housings
Locking type	With main latch
Cable exit	Straight
Type of the screw connection	1x M32
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Material lock	Steel, galvanized

Diagrams/Drawings

Dimensioned drawing

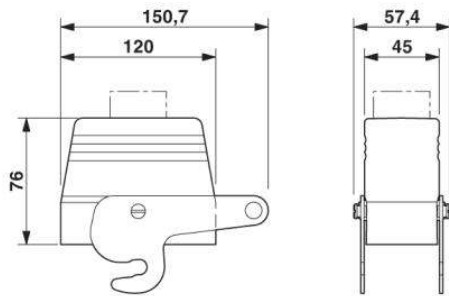

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;