

1

2





3

4

5

6

7

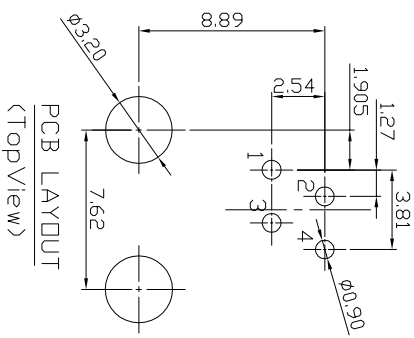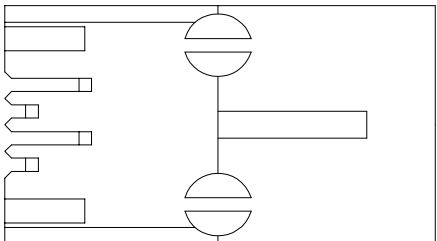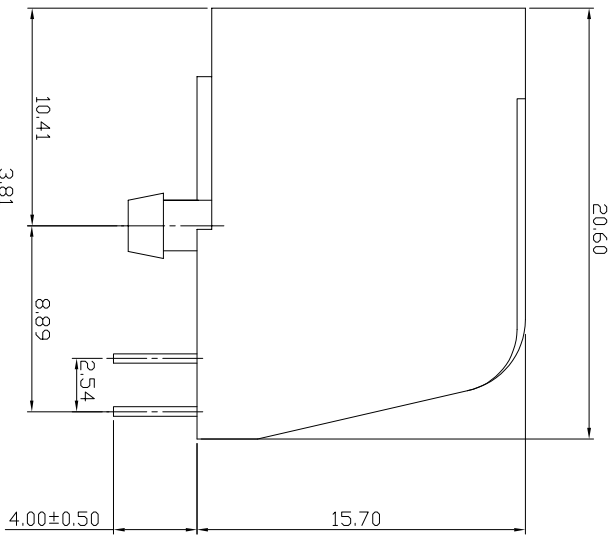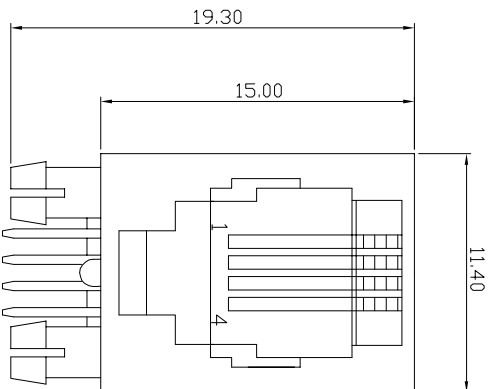

**RoHS compliant**  
Unit:mm

- Specification:
- Electrical Char  
Insulation Resistance: 500MΩ min. 500V DC for 1 minute  
Contact Resistance: 30mΩ max.  
Rating Current: 1.5A max.  
Rating Voltage: 150V AC  
Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.
  - Physical Char  
Housing: PBT Glass filled (UL 94V-0) Color: Black  
Soldering Temperature: 235°C for 5 sec.  
Spring Wire: 0.35mm Dia Phosphor Bronze  
6u" Gold plating over Nickel  
Temperature Range: -40°C to +85°C  
Durability: 750 mating cycles min.
  - Packing: Tray

Scale	Free
TOLERANCE	
.XX	±0.20
.XXX	±0.13
.XXXX	±0.05
DIM	TOL
Angle	+0°30'

Id.	Modification	Date	Name
①	Drawn	04.08.2016	Winnie

Date	Name
04.08.2016	Winnie
04.08.2016	Winnie

Customer-No.	ASSMANN WSW-No.	Drawing-No.	ASS 7325 CO	rev00
	A-2004-3-4-N-R	Replace		SHEET



1

2

3

4

5

6

7

H

G

F

E

D

C

B

A