



**VLED-150W-HV Series**  
**347-480V Input, Fixed & Dimmable Output**  
 Switch Mode LED Drivers  
 Constant Current with Isolation  
 Aluminum Housing

**Electrical Specifications**

Input Voltage Range: 347-480 Nom. Vac (312-512 V Min/Max)  
 Frequency: 50/60 Hz Nom. (47-63 Hz Min/Max)  
 Power Factor: >0.90 @ 75-100% load, 347-480V  
 Inrush Current: 20 Amps max @ 480Vac, cold start 25°C  
 Input Current: 0.70A max @ 347Vac, 0.42A max @ 480Vac  
 Maximum Power: 150W  
 Line Regulation: ± 1%  
 Load Regulation: ± 3%  
 THD: ≤ 20% @ 75-100% load, 347-480V  
 Leakage Current: 1 mA @ 480VAC, 60Hz  
 Typical Efficiency 89-91% at 347VAC  
 Turn-on Delay: 1S max  
 Protection: Over-Voltage, Over-Temperature (105°C), and Short Circuit Protection

**Environmental Specifications**

Minimum Starting Temp: -40°C  
 Storage Temperature: -40°C to +85°C  
 Humidity: 5% to 100%  
 Cooling: Convection  
 Sound Rating: Class A  
 MTBF: 250,000 Hours @ 480VAC input, 80% load and 25°C ambient conditions per MIL-HDBK-217F  
 Lifetime: 145,700 Hours @ 480Vac, 80% load and 45°C ambient  
 Weight: 2.87 lbs. (1300g)



- Total Power: 150 Watts
- Input Voltage: 347-480 Vac Nom.
- UL Dry & Damp Location Rated
- IP67
- High Power Factor
- UL8750, EN61347
- UL Type HL, for use in a Class 1, Division 2 hazardous locations

**Ordering Options:**

-D: 0-10V dimmable version comes with an extra three wires Purple/Gray/Blk-Wht on the output side. Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for additional specifications.

**Constant Current - Product Specifications**

Model Number	Output Current (mA ±5%)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency
VLED150W-258-C0580-X-HV	580	129-258	150	91%
VLED150W-214-C0700-X-HV	700	107-214	150	91%
VLED150W-142-C1050-X-HV	1050	71-142	150	90%
VLED150W-107-C1400-X-HV	1400	53-107	150	90%
VLED150W-071-C2100-X-HV	2100	36-71	150	90%
VLED150W-054-C2800-X-HV	2800	27-54	150	90%
VLED150W-043-C3500-X-HV	3500	21-43	150	89%
VLED150W-036-C4200-X-HV	4200	18-36	150	89%

-X indicates dimming options are available. See options at left. Blank = fixed current output





**Note:**  
 LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.  
 Specifications subject to change without notice.

Rev 10-13-16



**Dimensions - Inches (mm)**

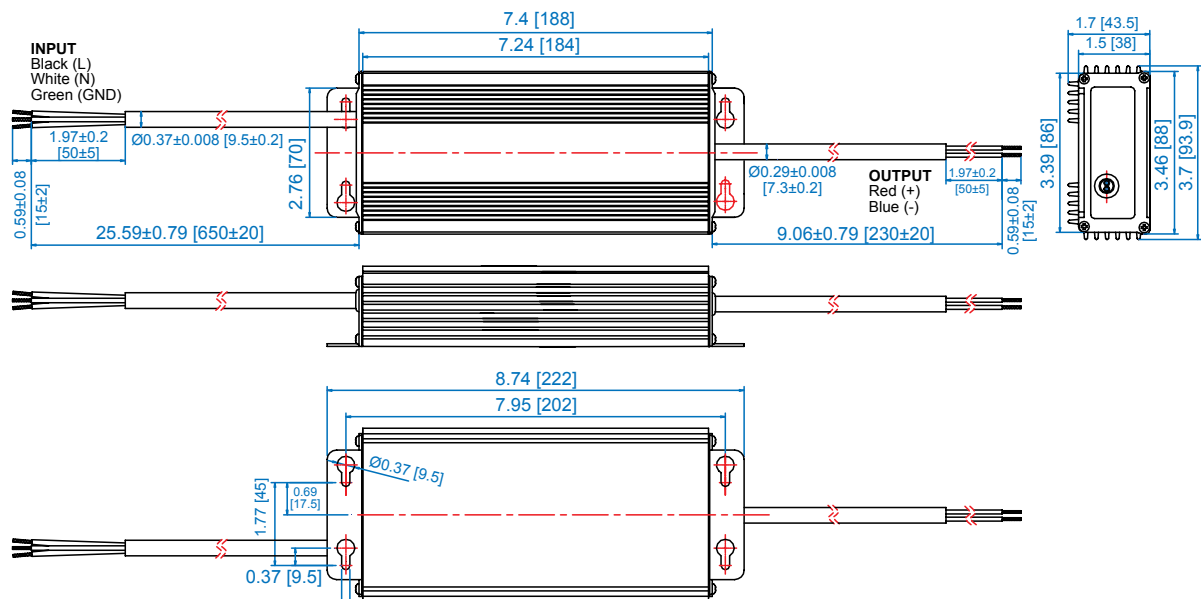
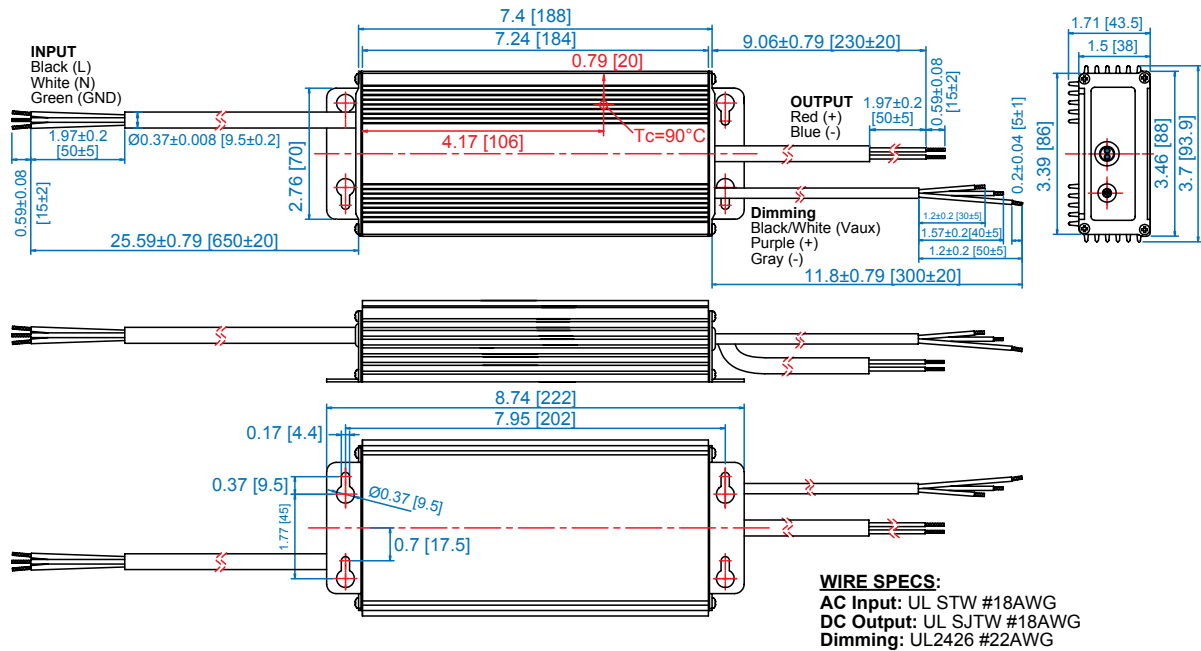


Safety Cert.	Standard
UL/CUL	UL8750, UL1012, UL935
CSA	C22.2 No. 107.1-01
EMC Standard	Notes
FCC, 47CFR Part 15	Class B



**“-D” Option: - 0-10Vdc Dimming**

Parameters	Minimum	Typical	Maximum
12V output voltage (Vaux)	10.8 V	12 V	13.2 V
12V output source current	0 mA	—	20 mA
Absolute maximum voltage on the 0-10V input pin	-20 V	—	20 V
Source current on 0-10V input pin	100 $\mu$ A	140 $\mu$ A	250 $\mu$ A

**DC Input**

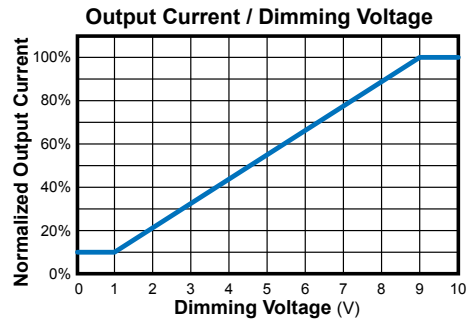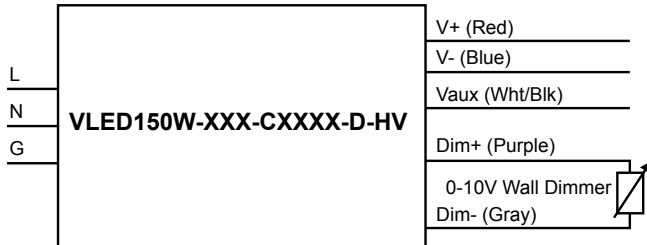


**External Resistor**

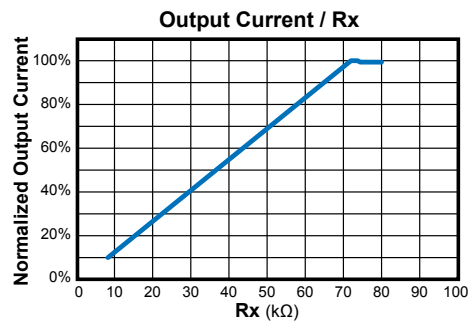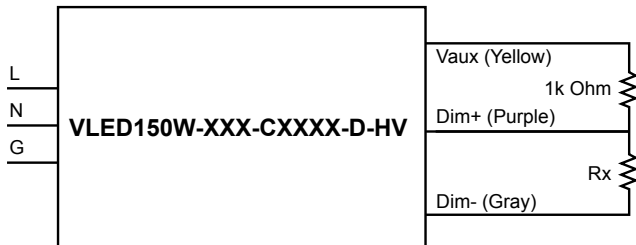


**Notes:**



1. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like resistors and zener.
2. The dimming signal is allowed to be less than 1V, when it is between 0 and 1V, the output level is 10%.
3. Do NOT connect the Gray Wire (Vdim-) to Blue Wire (V-) together.
4. The dimming section is not isolated with output.
5. If 0-10V dimming is not used, Dim + can be either open or connected to Vaux.

**Derating Curve**

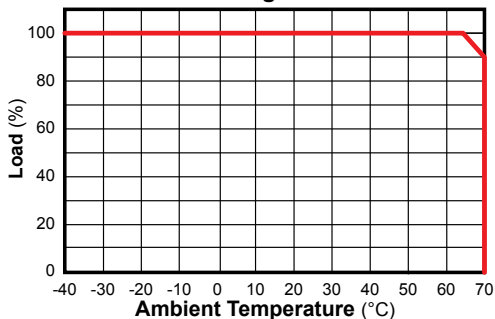

**Lifetime / Case Temperature**

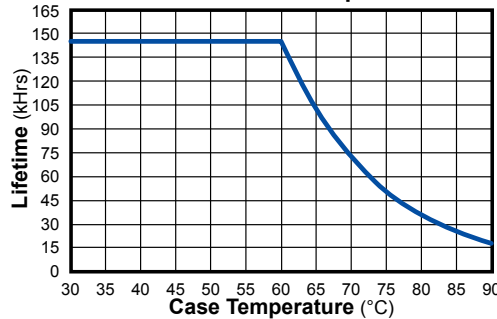

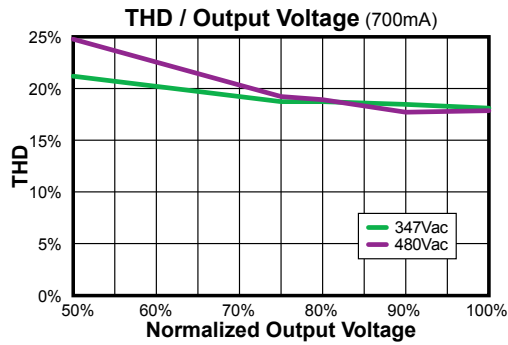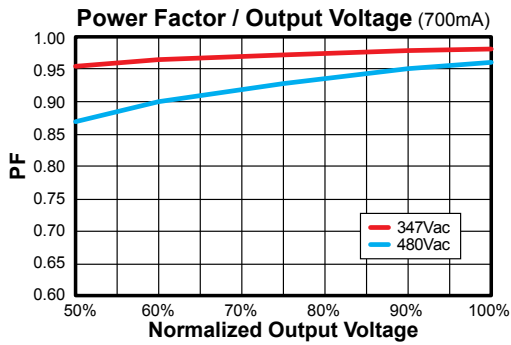

**Efficiency / Load**

