



**Electrical specifications**

**Center frequency:** 1360 MHz  
**Bandwidth:** 50 MHz Min  
**Insertion loss (BW):** 2.8 dB typ (3.0 dB max)  
**Ripple in BW:** 1.0 dB typ (1.2 dB max)  
**VSWR:** 1.5:1  
**Attenuation 1:** 30 dB min@1315 MHz  
**Attenuation 2:** 7 dB min@1400 MHz  
**In/Out Impedance:** 50 Ohm  
**Input Power:** 5 Watts max

**Mechanical**


**Mounting Method:** 2-56 Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 1.77 x 1.65 x 0.51 Inches

**Environmental**

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

**This product is RoHS Compliant**

**Outline Drawing:**

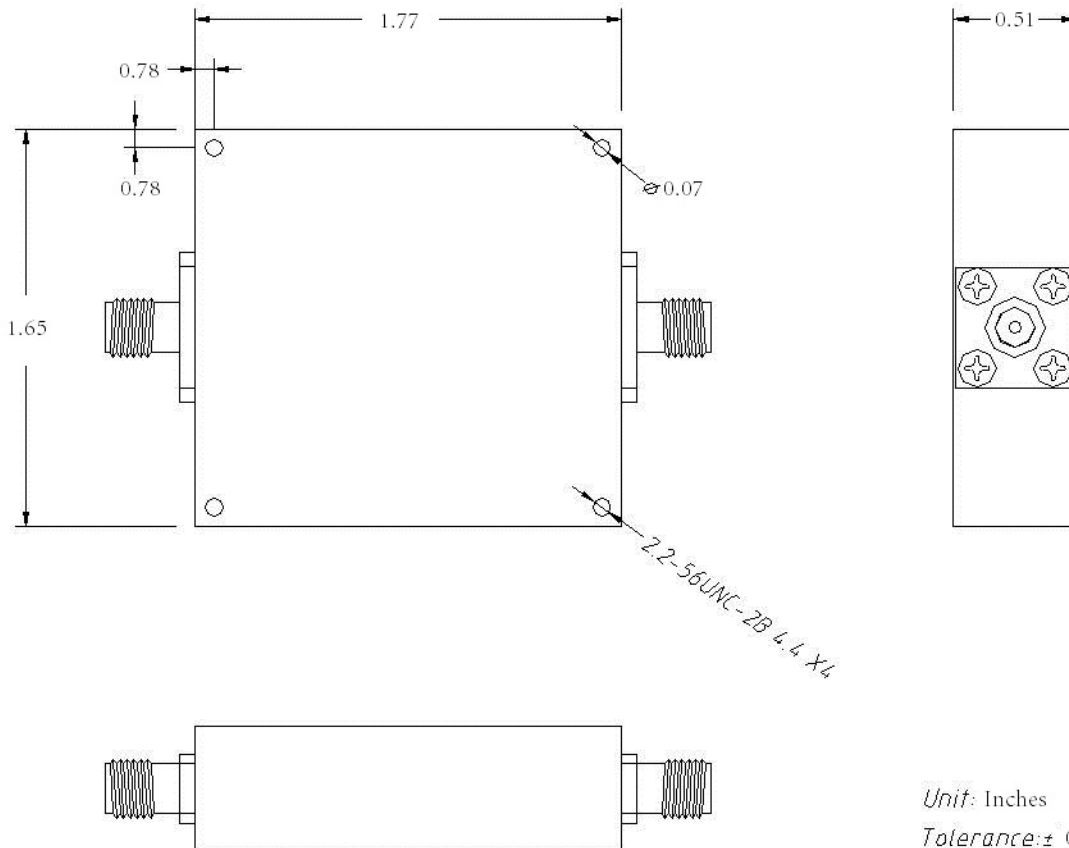

Unit: Inches  
Tolerance: ± 0.01