


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.



| REVISION | | | |
|----------|------------------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| B | Updated Specifications | 01-25-11 | LY |
| | | | |

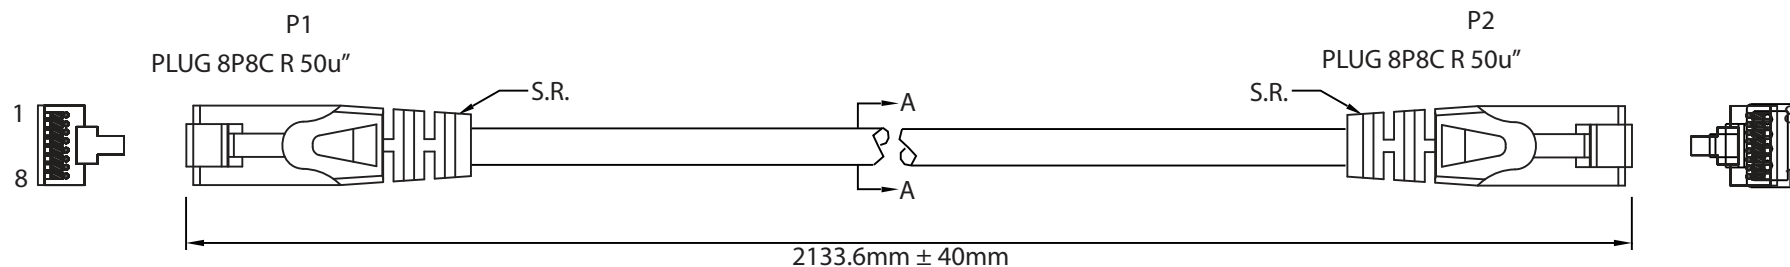

WIRING:568B

| P1 | COLOR | P2 |
|----|--------------|----|
| 1 | white/orange | 1 |
| 2 | orange | 2 |
| 3 | white/green | 3 |
| 6 | green | 6 |
| 4 | blue | 4 |
| 5 | white/blue | 5 |
| 7 | white/brown | 7 |
| 8 | brown | 8 |

NOTE: ∞ TWISTED PAIR

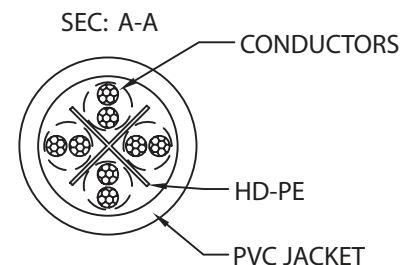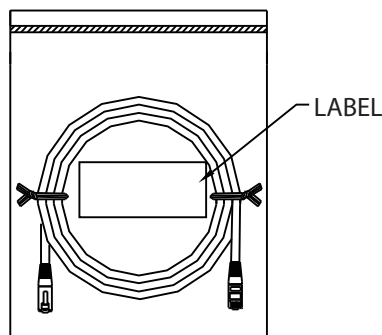

CONTROLLED

NOTES:

- CABLE: CAT.6 UTP
26AWG COPPER STRANDED WIRE. 4 TWISTED PAIRS, 30V, 60°C
OUTER JACKET: COLOR: YELLOW, O.D.: 6.0 ± 0.2mm
JACKET MATERIAL: PVC
- PLUG TYPE: MODULAR U.S. 8P8C GOLD PLATING 50u"
MATERIAL: PC UL 94V-2
S.R.: PVC 75P MOLD, COLOR: YELLOW
- PACKING: 1PC/POLYBAG
- RoHS COMPLIANT

| Dim range (mm) | | Tolerance +/- (mm) | Qualtek Electronics Corp. WCI DIVISION | | |
|----------------|------|-------------------------|---|-----------------|--|
| 0-1 | 0.15 | Part Number: 1226011-07 | RoHS Compliant | | |
| 1-6 | 0.20 | | Description: CAT.6 UTP 8P8C - 8P8C | | |
| 6-18 | 0.30 | Drawn / Date | UNIT: mm | REV.B | |
| 18-50 | 0.50 | | Checked / Date | Approved / Date | |
| 50-120 | 0.70 | R.Nuti 09-16-10 | 09-16-10 | LY / 09-16-10 | |
| 120-250 | 0.90 | | | | |
| 250-500 | 1.20 | | | | |