




QUAD  
MULTIPLEXER/LATCH


SY100S355

- Max. propagation delay of 1100ps
- Max. enable to output delay of 1400ps
- IEE min. of -80mA
- Industry standard 100K ECL levels
- Extended supply voltage option:  
VEE = -4.2V to -5.5V
- Voltage and temperature compensation for improved noise immunity
- Internal 75kΩ input pull-down resistors
- 50% faster than Fairchild
- Function and pinout compatible with Fairchild F100K
- Available in 28-pin PLCC package

The SY100S355 offers four transparent latches with differential outputs and is designed for use in high-performance ECL systems. The Select inputs ( $\bar{S}_0$ ,  $S_1$ ) select one of the two sources of input data ( $D_0$  or  $D_1$ ) to the latch. The Select inputs can also force the outputs to a logic LOW when the latch is in the transparent mode. The latches are in the transparent mode when both Enables ( $\bar{E}_1$ ,  $\bar{E}_2$ ) are at a logic LOW state. In the transparent mode, the Select inputs can pass an input logic HIGH from  $D_0$  or  $D_1$  to the output.

If the Select inputs are tied together, then input data from either  $D_0$  or  $D_1$  is always passed through. A rising edge on either Enable input will latch the outputs with the most recent data at the latch inputs being stored. The Master Reset (MR) input overrides all other inputs and takes the Q outputs to a logic LOW. The inputs on this device have 75kΩ pull-down resistors.

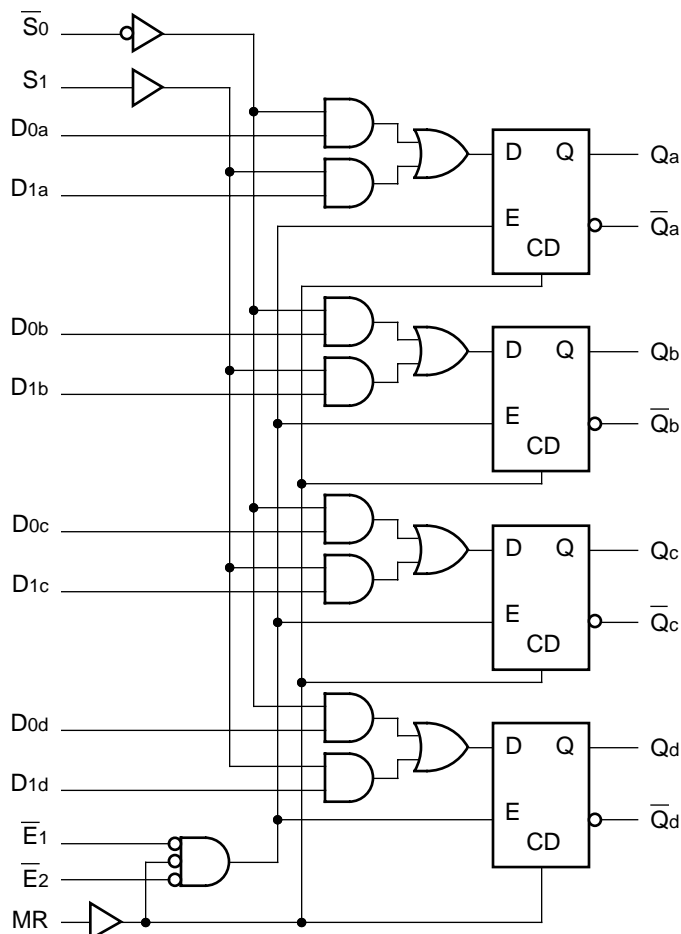

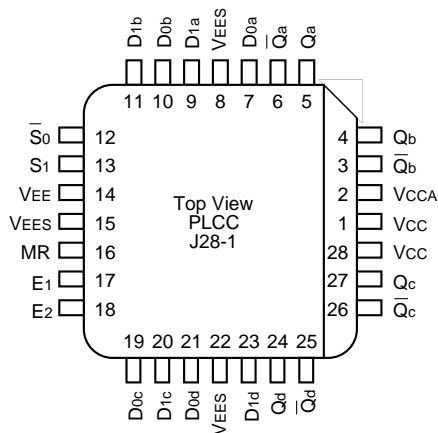

28-Pin PLCC (J28-1)

### Ordering Information

| Part Number                     | Package Type | Operating Range | Package Marking                             | Lead Finish |
|---------------------------------|--------------|-----------------|---|-------------|
| SY100S355JC                     | J28-1        | Commercial      | SY100S355JC                                 | Sn-Pb       |
| SY100S355JCTR <sup>(1)</sup>    | J28-1        | Commercial      | SY100S355JC                                 | Sn-Pb       |
| SY100S355JZ <sup>(2)</sup>      | J28-1        | Commercial      | SY100S355JZ with Pb-Free bar-line indicator | Matte-Sn    |
| SY100S355JZTR <sup>(1, 2)</sup> | J28-1        | Commercial      | SY100S355JZ with Pb-Free bar-line indicator | Matte-Sn    |

**Notes:**

1. Tape and Reel.
2. Pb-Free package is recommended for new designs.

| Pin                     | Function                   |
|-------------------------|----------------------------|
| $\bar{E}_1 - \bar{E}_2$ | Enable Inputs (Active LOW) |
| $\bar{S}_0, S_1$        | Select Inputs              |
| MR                      | Master Reset               |
| $D_{na} - D_{nd}$       | Data Inputs                |
| $Q_a - Q_d$             | Data Outputs               |
| $\bar{Q}_a - \bar{Q}_d$ | Complementary Data Outputs |
| VEES                    | VEE Substrate              |
| VCCA                    | VCCO for ECL Outputs       |

| MR | Inputs      |             |       |       |          |          | Outputs     |         |
|----|-------------|-------------|-------|-------|----------|----------|-------------|---------|
|    | $\bar{E}_1$ | $\bar{E}_2$ | $S_1$ | $S_0$ | $D_{1x}$ | $D_{0x}$ | $\bar{Q}_x$ | $Q_x$   |
| H  | X           | X           | X     | X     | X        | X        | H           | L       |
| L  | L           | L           | H     | H     | H        | X        | L           | H       |
| L  | L           | L           | H     | H     | L        | X        | H           | L       |
| L  | L           | L           | L     | L     | X        | H        | L           | H       |
| L  | L           | L           | L     | H     | X        | L        | H           | L       |
| L  | L           | L           | H     | L     | L        | X        | L           | H       |
| L  | H           | X           | X     | X     | X        | X        | Latched     | Latched |
| L  | X           | H           | X     | X     | X        | X        | Latched     | Latched |

**NOTE:**


1. H = High Voltage Level  
L = Low Voltage Level  
X = Don't Care

$V_{EE} = -4.2V$  to  $-5.5V$  unless otherwise specified;  $V_{CC} = V_{CCA} = GND$


| Symbol          | Parameter                         | Min. | Typ. | Max. | Unit | Condition                                |
|-----------------|-----------------------------------|------|------|------|------|--|
| I <sub>IH</sub> | Input HIGH Current                | —    | —    | 220  | μA   | V <sub>IN</sub> = V <sub>IH</sub> (Max.) |
|                 | S <sub>0</sub> , S <sub>1</sub>   | —    | —    | 350  |      |  |
|                 | $\bar{E}1$ , $\bar{E}2$           | —    | —    | 340  |      |  |
|                 | D <sub>na</sub> , D <sub>nd</sub> | —    | —    | 430  |      |  |
| MR              | —                                 | —    | 430  |      |      |  |
| I <sub>EE</sub> | Power Supply Current              | -80  | -57  | -40  | mA   | Inputs Open                              |

$V_{EE} = -4.2V$  to  $-5.5V$  unless otherwise specified;  $V_{CC} = V_{CCA} = GND$


| Symbol                               | Parameter  | T <sub>A</sub> = 0°C |      | T <sub>A</sub> = +25°C |      | T <sub>A</sub> = +85°C |      | Unit | Condition |
|--------------------------------------|--|----------------------|------|------------------------|------|------------------------|------|------|-----------|
|                                      |  | Min.                 | Max. | Min.                   | Max. | Min.                   | Max. |      |           |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>D <sub>na</sub> – D <sub>nd</sub> to Output<br>(Transparent Mode) | 300                  | 1100 | 300                    | 1100 | 300                    | 1100 | ps   |           |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>$\bar{S}0$ , S <sub>1</sub> to Output<br>(Transparent Mode)       | 300                  | 1400 | 300                    | 1400 | 300                    | 1400 | ps   |           |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>$\bar{E}1$ , $\bar{E}2$ to Output                                 | 300                  | 1400 | 300                    | 1400 | 300                    | 1400 | ps   |           |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>MR to Output  | 300                  | 1100 | 300                    | 1100 | 300                    | 1100 | ps   |           |
| t <sub>TLH</sub><br>t <sub>THL</sub> | Transition Time<br>20% to 80%, 80% to 20%  | 300                  | 900  | 300                    | 900  | 300                    | 900  | ps   |           |
| t <sub>S</sub>                       | Set-up Time<br>D <sub>na</sub> – D <sub>nd</sub>                                       | 700                  | —    | 700                    | —    | 700                    | —    | ps   |           |
|                                      | S <sub>0</sub> , S <sub>1</sub>  | 1200                 | —    | 1200                   | —    | 1200                   | —    |      |           |
|                                      | MR (Release Time)  | 1000                 | —    | 1000                   | —    | 1000                   | —    |      |           |
| t <sub>H</sub>                       | Hold Time<br>D <sub>na</sub> – D <sub>nd</sub>   | 300                  | —    | 300                    | —    | 300                    | —    | ps   |           |
|                                      | S <sub>0</sub> , S <sub>1</sub>  | 300                  | —    | 300                    | —    | 300                    | —    |      |           |
| t <sub>PW</sub> (L)                  | Pulse Width LOW, $\bar{E}1$ , $\bar{E}2$   | 1000                 | —    | 1000                   | —    | 1000                   | —    | ps   |           |
| t <sub>PW</sub> (H)                  | Pulse Width HIGH, MR   | 1000                 | —    | 1000                   | —    | 1000                   | —    | ps   |           |

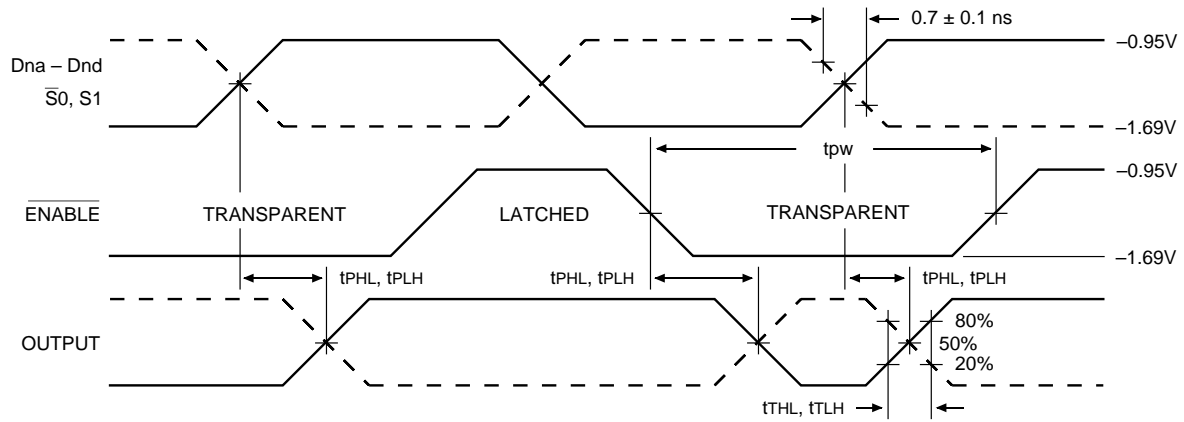

Enable Timing

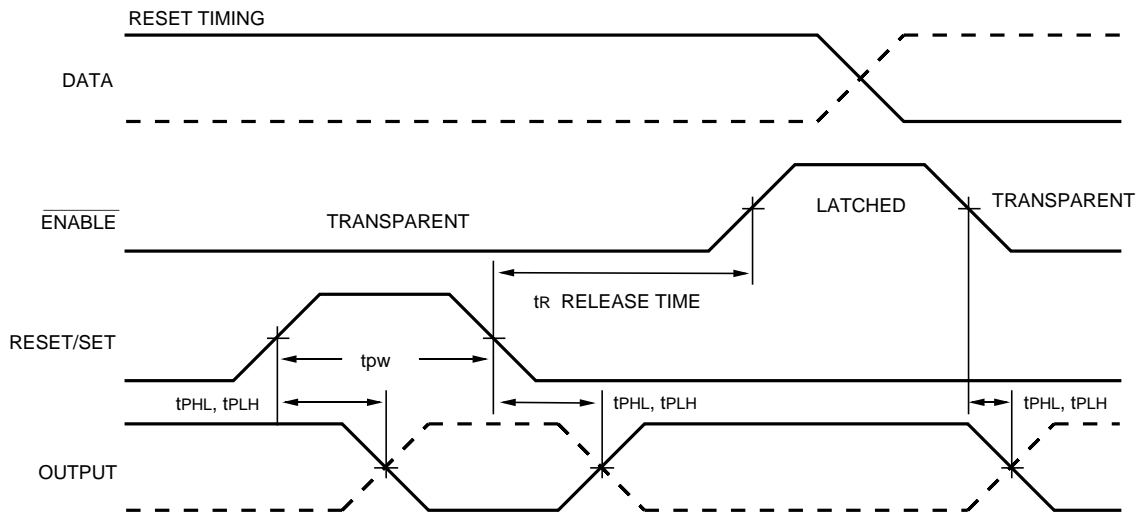


Reset Timing

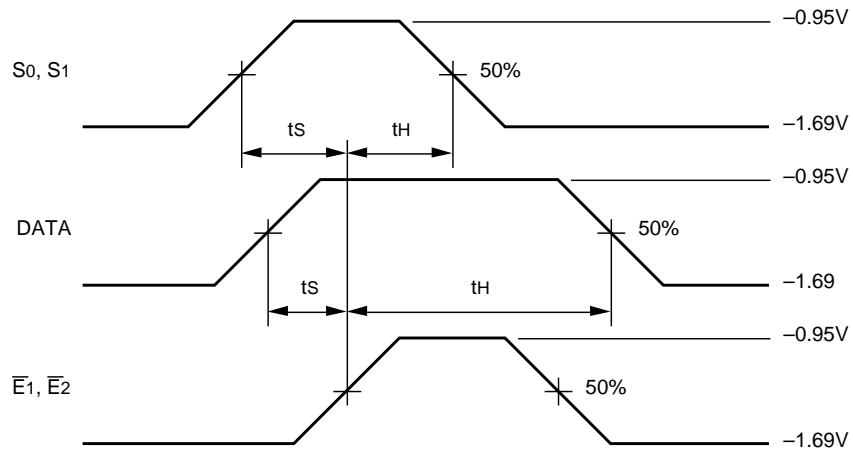


**Data Set-up and Hold Times**

**Notes:**


1.  $V_{EE} = -4.2V$  to  $-5.5V$  unless otherwise specified;  $V_{CC} = V_{CCA} = GND$
2.  $t_s$  is the minimum time before the transition of the clock that information must be present at the data input.
3.  $t_H$  is the minimum time after the transition of the clock that information must remain unchanged at the data input.

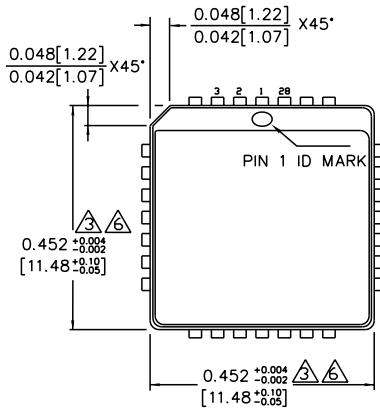


TOP VIEW

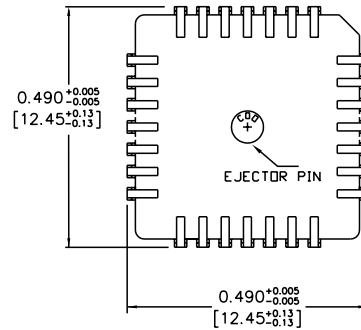

BOTTOM VIEW

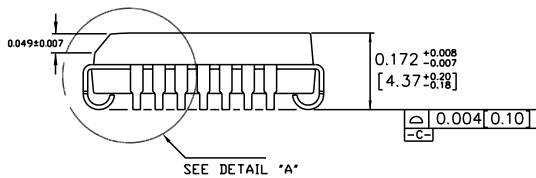

SIDE VIEW

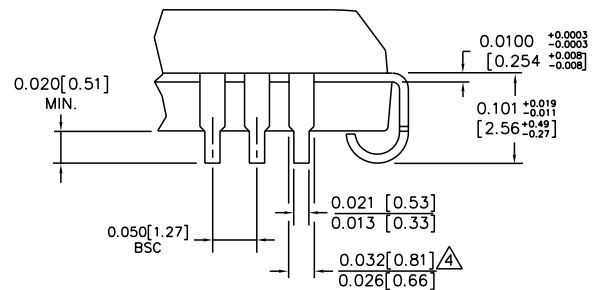

DETAIL "A"

NOTES:

1. DIMENSIONS ARE IN INCHES [MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008 [0.203].
4. LEAD DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.
5. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX/MIN
6. PACKAGE TOP DIMENSION MAY BE SLIGHTLY SMALLER THAN BOTTOM DIMENSION.

Rev. A

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.