2098198-5 - ACTIVE

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 2098198-5 Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 1 Position, Sealable, Black, Signal, Cable Mount (Free-Hanging), -40 – 155 °C, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP MCP, SEALED CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 1

Sealable: Yes

All AMP MCP, SEALED CONNECTOR HOUSING (164)

Features

Product Type Features

Connector Shape

Circular

Connector & Housing Type

Housing for Female Terminals

Connector System	Wire-to-Board, Wire-to-Device
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	1
Number of Rows	1
Body Features	
Primary Product Color	Black
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	

& For support call+1 800 522 6752

ig remp erature na 19 Έ

Yes

Without

Polarized

Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Dimensions	
Connector Height	33 mm[1.299 in]
Product Width	24 mm[.945 in]
Product Length	22.6 mm[.89 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 ° C, 145 °C, 150 °C, 155 °C[158 °F][167 °F] [176 °F][185 °F][194 °F][212 °F][221 °F][230 ° F][248 °F][257 °F][266 °F][284 °F][293 °F][302 °F][311 °F]
Operating Temperature Range	-40 – 155 °C

2098198-5

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 1 Position, Sealable, Black, Signal, Cable Mount (Free-Hanging), -40 – 155 °C, Hybrid

Terminal Position Assurance

Mating Alignment Type

Strain Relief



Operation/Application

Circuit Application	Signal
Industry Standards	
Degree of Protection	IP69K
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

2098198-5

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 1 Position, Sealable, Black, Signal, Cable Mount (Free-Hanging), -40 – 155 °C, Hybrid



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series AMP MCP 2.8

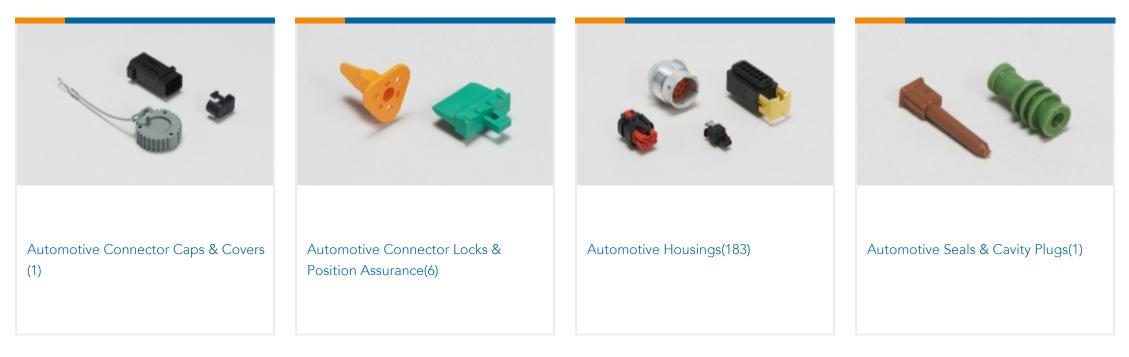

2098198-5

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 1 Position, Sealable, Black, Signal, Cable Mount (Free-Hanging), -40 – 155 °C, Hybrid



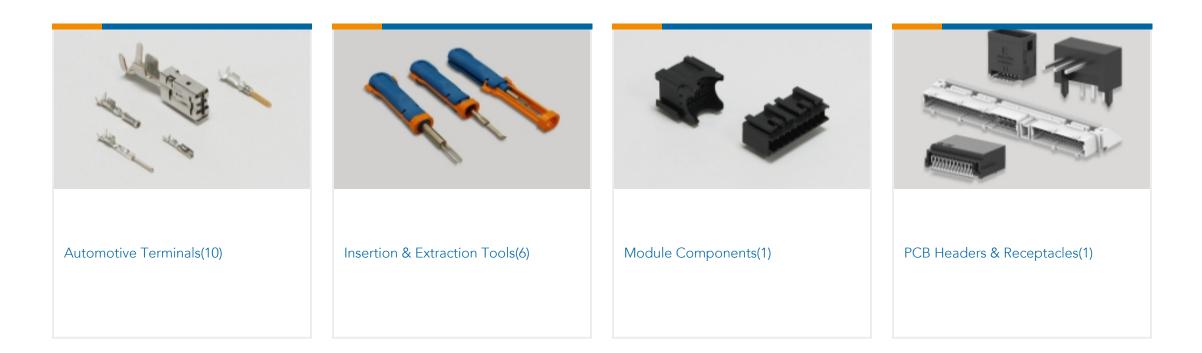

Also in the Series AMP MCP Connector System


Automotive Connector Caps & Covers (25)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(360)	Automotive Seals & Cavity Plugs(6)
And the second s			

Automotive	Terminals	(135))
/ 10/01/10/11/0	1 CTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTT	100	/

Insertion & Extraction Tools(13)

Other Automotive Connector Accessories(2) PCB Headers & Receptacles(30)

Customers Also Bought

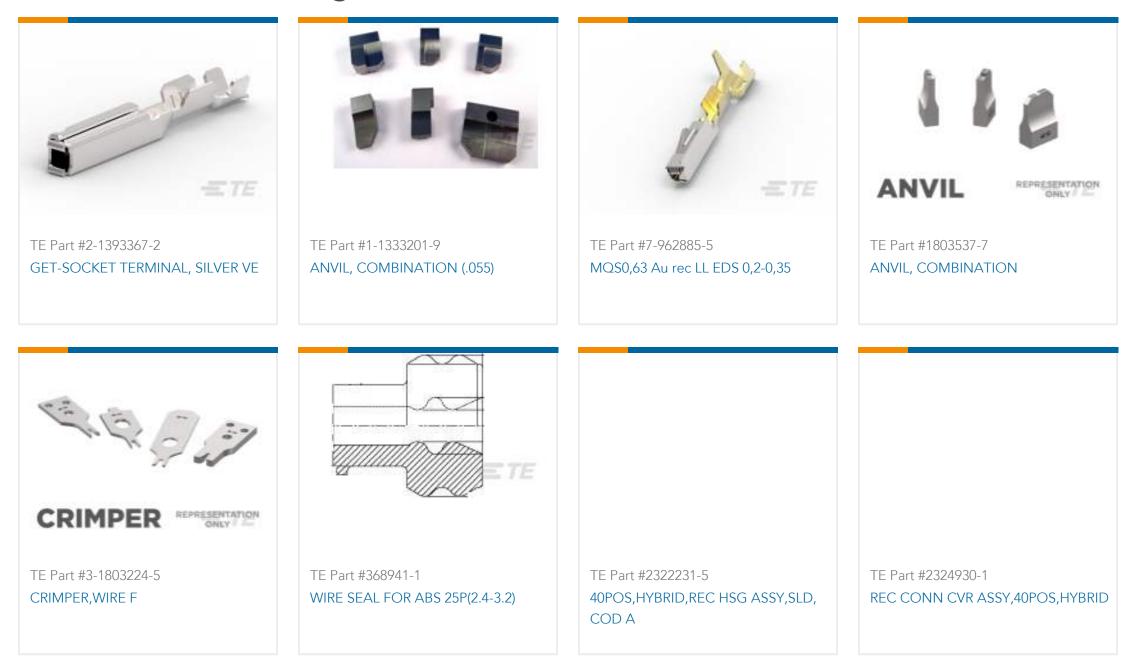

C For support call+1 800 522 6752

2098198-5

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 1 Position, Sealable, Black, Signal, Cable Mount (Free-Hanging), -40 – 155 °C, Hybrid



TE Part #5-1924513-3 TE Part #3-1438103-8 GET 24 WAY ARM PLUG NSB, KEY A GET 40 WAY HARNESS ASSY, KEY J

Documents

Product Drawings

Plug Assembly, Sealed, 1 Posn,

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2098198-5_C_c-2098198-5-c.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2098198-5_C_c-2098198-5-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2098198-5_C_c-2098198-5-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English