

т	۵	г т	<u> </u>	0
	_			



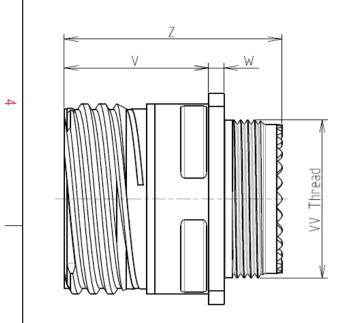

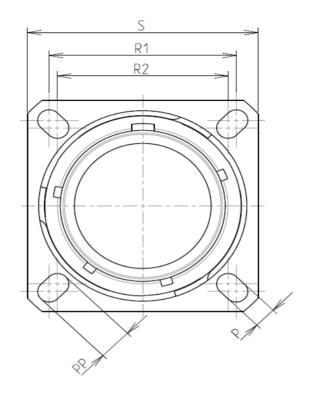

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: −65°C to +175°C				
-Salt Spray	: 500 hours				

: 11.64 g ± 10%

8D 0

G

11

Ζ

02

Ρ

F

D


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-02





	σ	I	Þ				
]		
					4		
1	10/2	D TONO D TONO D TONO D TONO					
9							
	0						
	(
		1					
		1					
S FY/	AMPLE				3		
.J L <i>NF</i>	1711 LL						
r any i	non-conformit	ty or dam	age				
s whic	which does not comply with of the Parties or by a third party						
	on, technical n		Party				
untry	lurice	liction & 1	Control List] ¬			
FR	Julisu	Not Lis			2		
17(02PD						
				MOD N°			
		CUSTO	MER DRAWING	1			
um	Receptacl	e 8D s	eries				
ar :		NPR	DS / PROJECT				
		Th	859	nerty of	1		
J.CC	COM This document is the property of SOURIAU it must not be reproduced or						
	it must not be reproduced or communicated without permission						
U I	DRG N°	<u> </u>		SHEET			
.Z0	2PD-C			1/2			
	В		А	•	-		

r	т	۵		П	m	D		0	
		Contact Layout							Panel Cutou
4	.x .0 (2.	+Y B A +Y +X +X 95 4(mm) (2.4(mm))					2 -	SOUARE FLANGE RECEPTACLE (T REAR MOUNTING	
	Shell Arrangement no.	X-axis Y-axis (mm) (mm) 4 +.095 (2.41) +.000 (.00) 5 095 (2.41) +.000 (.00)	Contact location All				¥ (Dim
ယ									ØA ØAA R1 ØT
								the Specifications i	of the Products wh
N							1	P	Countr FR N: 8D0112
						A ISS Design	DATE ned By:	6 First Release Latest modification Date:	
_							TITLE		General linear Tolerances: ±
						FOF			SOURIAU.C
	Н	G		F	E		\3	С	8D011Z0
						V			

