

RQRA-0200-LPH

1.0 ELECTRICAL SPECIFICATIONS


PARAMETER	CONDITION	SYMBOL	VALUE			UNIT
			Min.	Typ.	Max.	
Frequency Range	Vt=0~5.0V	fo(Vt)		200		MHz
Power Supply Voltage		Vcc	4.75	5.0	5.25	V
Tuning Voltage		Vt	0		5.0	V
Supply Current		Icc		18	35	mA
Tuning Sensitivity	Over Tuning Range	Kvo		0.8		MHz/V
Tuning Port Capacitance		Vt _{cap}		330		pF
Modulation Bandwidth	@3dB BW	M _{BW}		1000		kHz
Pushing	Over ±5 % Supply Variation	df/dVcc		0.1	0.2	MHz/V
Pulling ^{1,2}	@12dBr, all phases	df/dZL		0.5	1.0	MHz/p-p
Operating Temperature		Ta	-40		85	°C
Storage Temperature		Tstor	-45		90	°C
Maximum Limits Voltage	For V _{cc(abs)}		-0.4		8.0	V
Moisture Sensitivity Level	MSL	JEDEC J-STD-2	1			
Termination Finish			Glass-reinforced laminate base and nickel-silver cover			
ESD Sensitivity	HBM	Human body model JESD22-A114		3		kV

2.0 OUTPUT CHARACTERISTICS

SINE-WAVE	PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
				Min	Typ.	Max	
	Output Power	Pw	Output termination 50Ω Vt=0~5.0V, Vcc=5.0V	7.0	9.0	11.0	dBm
	2 nd Harmonic Suppression	a(n*fo)			-30	-15	dBc
	3 rd Harmonic Suppression				-35	-15	
	Output Load	O _{CL}		50		Ω	

RQRA-0200-LPH

3.0 MECHANICAL DIMENSIONS AND PIN FUNCTIONING

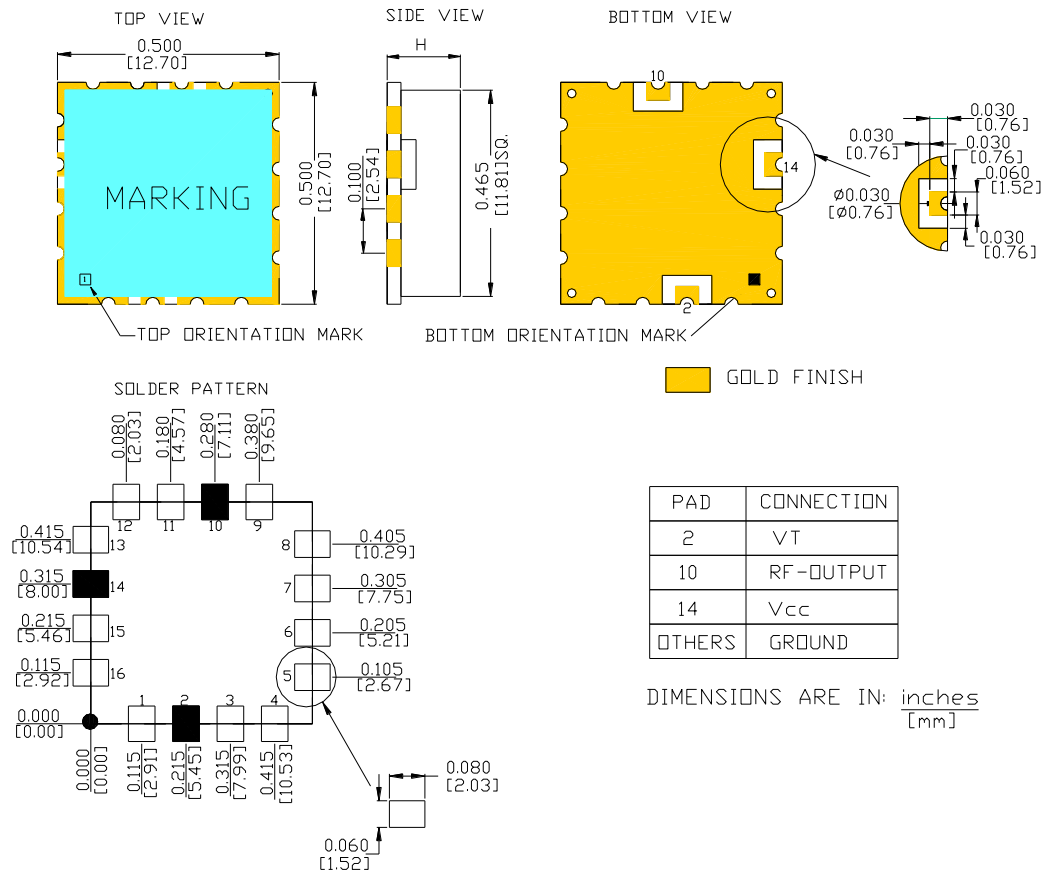

$$H = \frac{0.236}{6.0} \text{ Max.}$$

■ Marking:

RQRA 0200-LPH 1 Date code

RQRA-0200-LPH

4.0 PHASE NOISE

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min	Typ	Max	
SSB Phase noise	$\Sigma(\Delta f)$	$\Delta f=1.0\text{kHz}$		-110	-105	dBc/Hz
		$\Delta f=10\text{kHz}$		-135	-130	
		$\Delta f=100\text{kHz}$		-155	-150	
		$\Delta f=1000\text{kHz}$		-160	-155	
		$\Delta f=10\text{MHz}$		-160	-155	

Typical Phase Noise Graph:



RQRA-0200-LPH

5.0 COMMON SPECIFICATIONS

- 5.1 Load impedance is 50 Ohms.
- 5.2 Pulling is measured with 12dB return loss, all phases.
- 5.3 Package outline tolerances are typ. $\pm 0.30\text{mm}$ / ± 0.012 inch if not stated differently on the drawing.
- 5.4 It is recommended to provide two bypass-capacitors (ceramic), from Vcc to Gnd, $1\text{nF} \parallel 100\text{pF}$.
- 5.5 Solder temperature (peak) is 260°C for 10-20 sec.

6.0 ENVIRONMENTAL SPECIFICATIONS


- 6.1. Storage Temperature Range: -45 to $+90^{\circ}\text{C}$ ambient
- 6.2. Operating Temperature Range: -40 to $+85^{\circ}\text{C}$ ambient
- 6.3. Operating Humidity: 15 to 100% relative humidity, non-condensing
- 6.4. Storage Humidity: 0 to 100% relative humidity, non-condensing
- 6.5. Operating Altitude: Up to 10,000 feet above sea level
- 6.6. Storage and Transport Altitude: Up to 50,000 feet above sea level

7.0 MECHANICAL- ELECTRICAL-ASSEMBLY PROCESS REQUIREMENTS

- 7.1. Mechanical and electrical performance specified in tables 1.0; 2.0; 3.0 and 4.0 should be met and exceeded the call out specification.
- 7.2. Module assembly process should be cleaned via an aqueous based system for normal SMT assembly processes.
- 7.3. The module internally and externally should be free off solder flux and residue from assembly processes.
- 7.4. High temperature solder such as SN95 or SN96 or equivalent should be used for internal construction of part.
- 7.5. When measuring the electrical performance, part must be completely dry, as any entrapped moisture will cause erroneous results.

RQRA-0200-LPH

8.0 REFLOW PROFILE

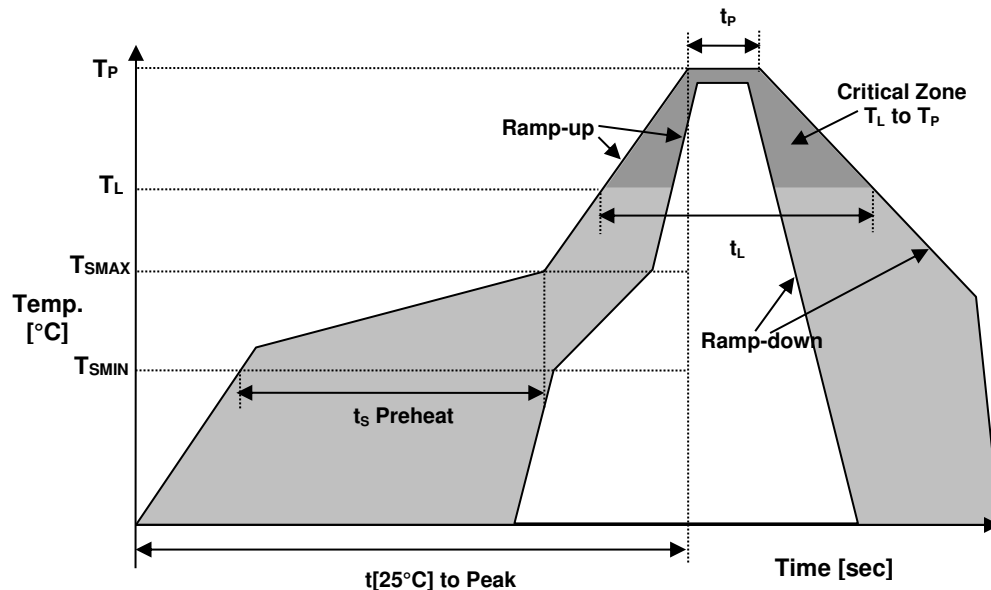

		Recommended Solder Reflow Profile	
Temperature Min Preheat		T_{SMIN}	150°C
Temperature Max Preheat		T_{SMAX}	175°C
Time (T_{SMIN} to T_{SMAX})		t_s	60-180 sec.
Temperature		T_L	217°C
Peak Temperature		T_P	260°C
Ramp-up rate		R_{UP}	3°C/sec max.
Ramp-down rate		R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature		t_p	10-20 sec max.
Time $t[25^\circ\text{C}]$ to Peak Temperature		$t[25^\circ\text{C}]$ to Peak	480 sec.
Time		t_L	60-150 sec.

9.0 APPROVALS		
Eng. approval, date:	IM	11/20/2017
Created by, date:	MH	11/20/2017
Revision: A		

