



PUIaudio



Data Sheet

HD-EMB1205-SC-R


Features:

- Designed to be driven with a 3V DC signal
- Convenient spring contacts for easy implementation
- Generates 12,000 rpm with less than 50dB mechanical noise

Specifications

Parameters	Values	Units
Input Voltage (DC)	3	V _{DC}
Starting Voltage (DC)	2.4	V _{DC}
Operating Voltage Range	2.4 ~ 3.6	V _{DC}
Direction of Rotation	CW/CCW	-
Rated Speed	12,000 ± 3,000	RPM
Rated Current (Max at 3.0 V _{DC})	90	mA
Starting Current (Max at 2.4 V _{DC})	120	mA
Terminal Resistance	30 ± 20%	Ohms
Shaft Pull Strength (Min)	3	Kg
Shaft End Play (Max)	0.3	mm
Mechanical Noise (Max)	50	dBA
Housing Material	SPC	-
Environmental Compliances	RoHS/REACH	-
Weight	1	Grams
Storage Temperature	-40 ~ +85	°C
Operating Temperature	-20 ~ +60	°C

Measurement Methods

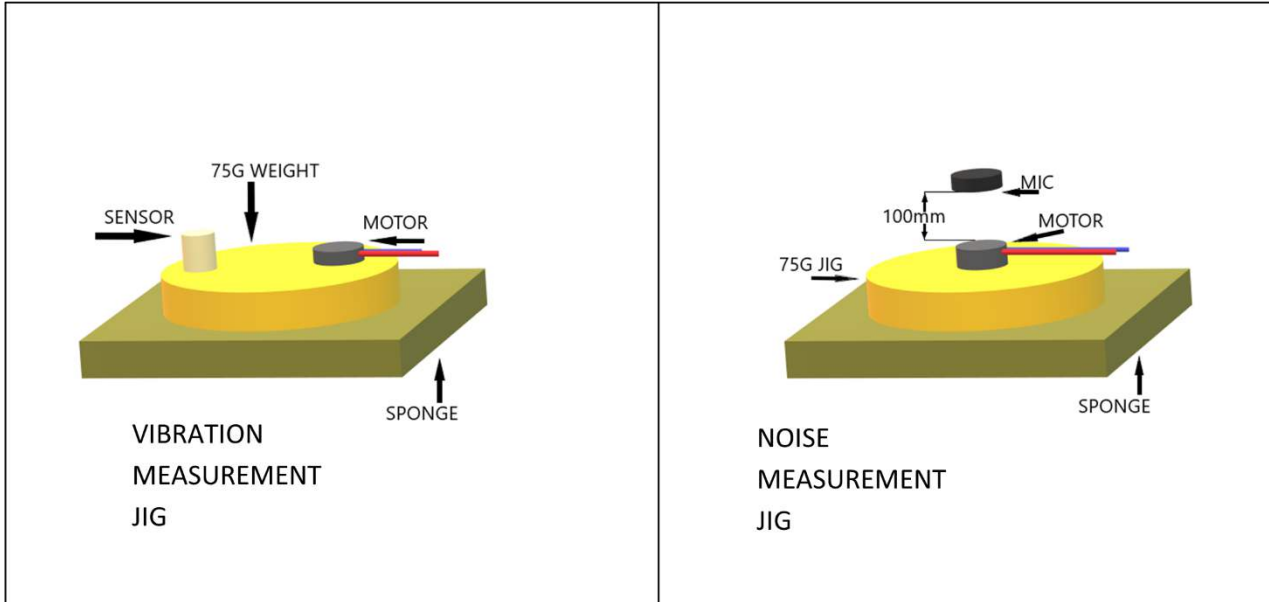


Reliability Testing

Type of Test	Test Specifications
High Temperature Test	Temperature: $+85\pm 2^{\circ}\text{C}$ Test Duration Time: 96 hours
Low Temperature Test	Temperature: $-40\pm 2^{\circ}\text{C}$ Test Duration Time: 96 hours
Humidity Test	Temperature: 70°C Relative Humidity: 90% Test Duration Time: 96 hours
Temperature Cycle Testing	Drive motor for 2 seconds on, 2 seconds off Repeat cycle shown 2 times
Vibration Test	Vibration: 3mm, 1000cpm Test Axis: XYZ Test Repetition: 10 minutes per axis (30 minutes total)
Drop Test	Drop Condition: 1.5m onto iron plate at weight 150g Test Repetition: 6 times per side (36 total)
Load Test	1,000,000 operating cycles at room temperature Test Cycle: 2 seconds on, 1 second off

Rated current, speed, starting voltage, and mechanical noise must meet specifications after allowing the device to rest for 12 hours after test.

Dimensions

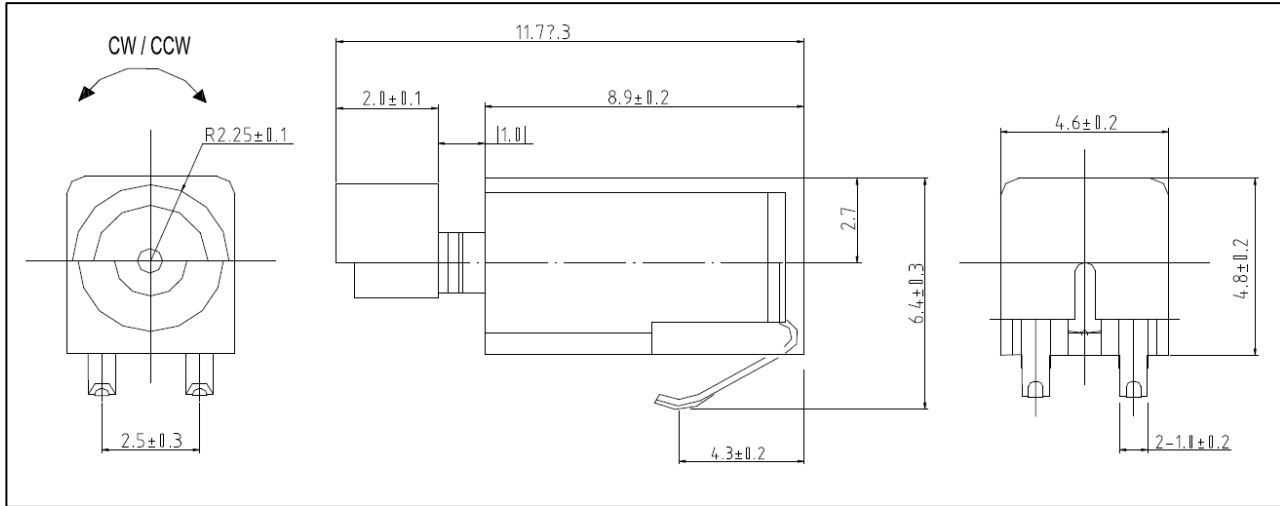

Packaging

Item	Tray	Inner Box	Outer Box
DIV.	PET	Carton box	Carton box
Dimension	141(L) x 150(W) x 11(H)	150(L) x 160(W) x 115(H)	330(L) x 330(W) x 270(H)
Quantity	50ea	1,000ea	8,000ea

Specifications Revisions

Revision	Description	Date
A	RELEASED FROM ENGINEERING	04/08/2022

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.