



Electrical specifications

Center Frequency: 922.75 MHz
Bandwidth: (917.5~928 MHz) 10.5 MHz
Insertion loss @ Fo: 4.4 dB max
VSWR: 1.5:1 Max
Ripple in Bw: 1.3 dB max
Attenuation: >19.2 dB @ 912.5 MHz
In/Out Impedance: 50 Ohm
Input power: 5 Watt


Mechanical

Mounting Method: Threaded Mounting Holes
Connectors: SMA Female
Dimensions: 63.5 x 22.23 x 15.88 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

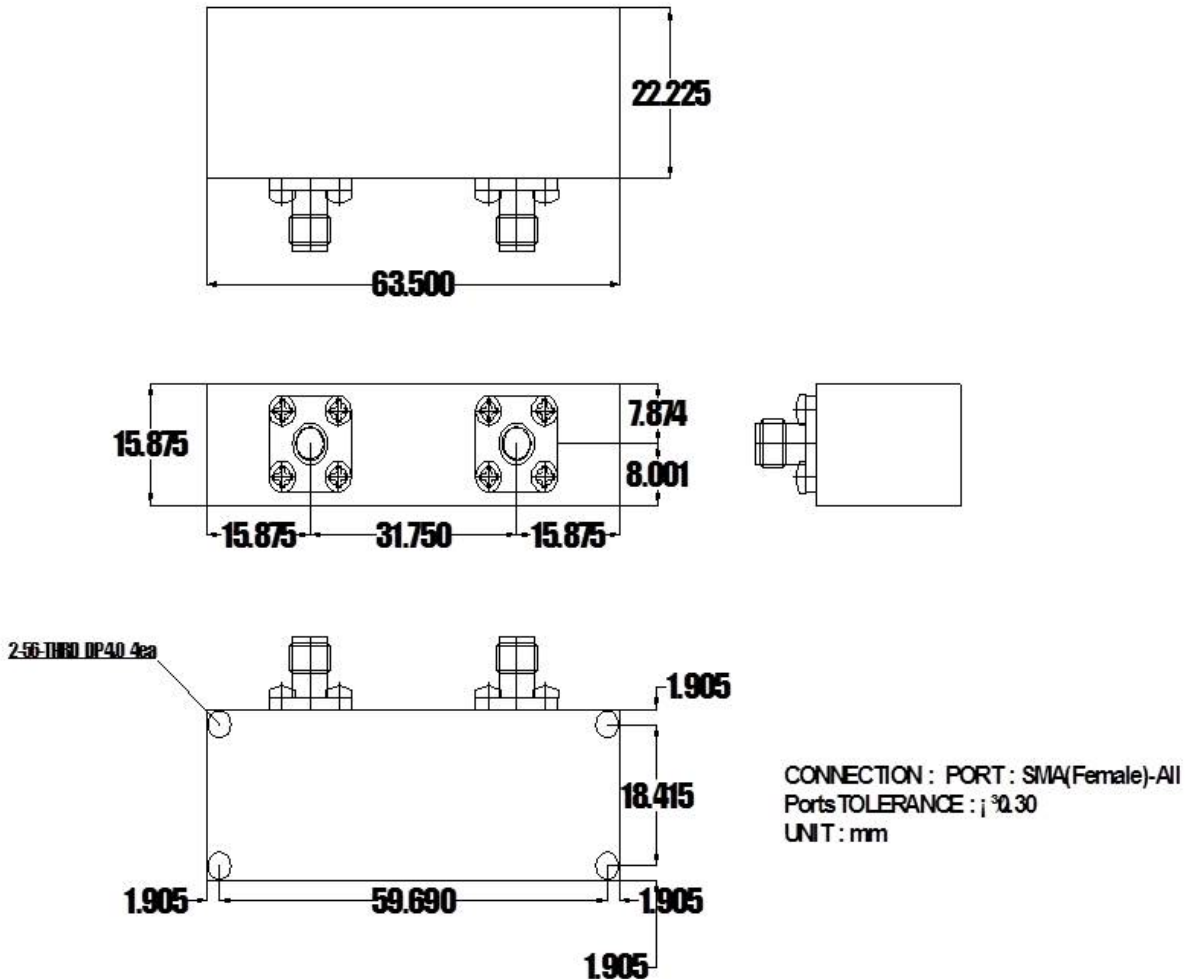

CONNECTION : PORT : SMA(Female)-All
 Ports TOLERANCE : ±0.30
 UNIT : mm