


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE		COLOR	MAX. WIRE INSULATION DIAMETER	DIMENSIONS in. [mm]			TOOL CHART	
		ENGLISH AWG	METRIC mm ²			L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	PRESSES: CP-861, CP-862, CP-871	APPLICATOR DIES: CA9, CA-800EZ
DNF18250FIBX	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.21 [5,4]	.93 [23,6]	.35 [8,9]	.22 [5,5]	CD-800-6 CD9-6B	
DNF18205FIBX	.205/.187 X .032 [5,2/4,8 X 0,8]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF18206FIBX	.205/.187 X .020 [5,2/4,8 X 0,5]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF14250FIBX	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.24 [6,1]	.93 [23,6]	.35 [8,9]	.22 [5,5]	CD-800-8 CD9-8B	
DNF14205FIBX	.205/.187 X .032 [5,2/4,8 X 0,8]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF14206FIBX	.205/.187 X .020 [5,2/4,8 X 0,5]					.87 [22,1]	.31 [7,9]	.22 [5,5]		

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
 - 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
 - STAMPING: CDA 260 BRASS, TIN PLATED
 - HOUSING: TYPE 66 NYLON
- WIRE STRIP LENGTH: 9/32" ^{+1/32} [7,1 ^{+0,8}]
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- COLORS ARE TRANSLUCENT

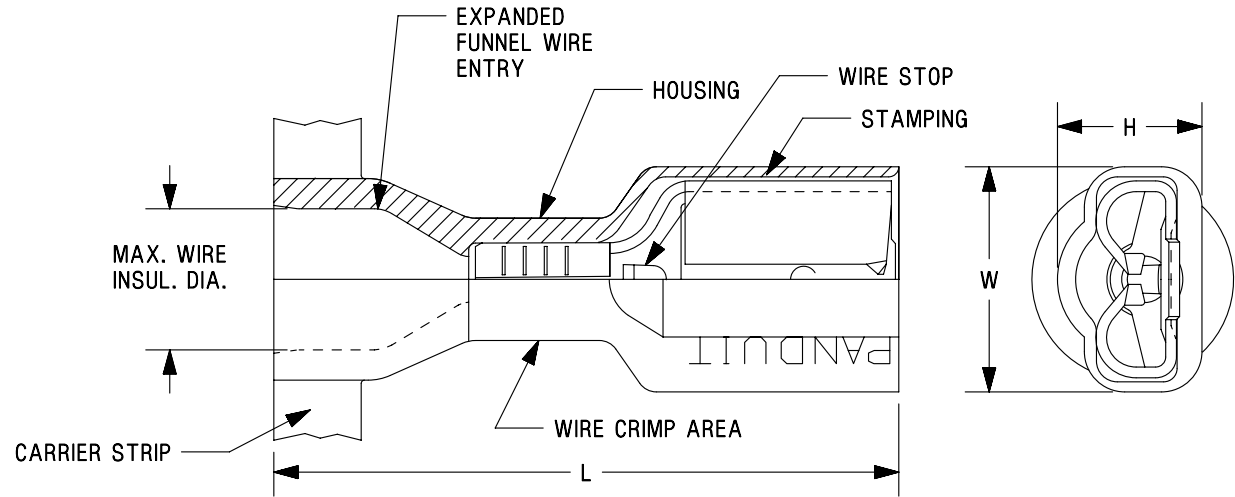

TITLE FEMALE DISCONNECTS, NYLON FULLY INSULATED - EXPANDED WIRE ENTRY		CUSTOMER DRAWING	
ITEM REVISION NAME N41167BA/05		PANDUIT	
DATASET FILE NAME N41167BA_DC/05A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER: A41167	
THIRD ANGLE PROJECTION		SHT 1 OF 1	
DRAWN BY DSM	DATE -	CHK -	SCALE N.T.S.

05	10.10.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. REVISED INSTALLATION TOOLS NOTE. UPDATED DRAWING TO CURRENT STANDARDS.	A41167
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/15