



902.5 MHz / 947.5 MHz Connectorized Ceramic Duplexer



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM902-947D1165-C

Parameter	Frequency (MHz)	Specification at 25°C
Low Band Response (S21)		
Pass Band Insertion Loss	890-915	-2.40
Pass Band Ripple	890-915	1.30
Pass Band Return Loss at Port 2	890-915	-12.00
Pass Band Return Loss at Ant	890-915	-12.00
Attenuation	870	-18.00
	925	-17.00
	935-960	-52.00
High Band Response (S13)		
Pass Band Insertion Loss	935-960	-2.40
Pass Band Ripple	935-960	-1.30
Pass Band Return Loss at Port 3	935-960	-12.00
Pass Band Return Loss at Ant	935-960	-12.00
Attenuation	925	-17.00
	890-915	-52.00
Isolation (S32)		
Rejection at Low Band	890-915	-55.00
Rejection at Mid Band	915-935	-40.00
Rejection at High Band	935-960	-55.00
Power into any port		6 W Max
Mechanical Specifications		
Mounting Method	Thru Hole Mounting	
Connectors	SMA Female	
Dimensions	65 x 40 x 20 mm	
Environmental Specifications		
Operating Temperature	-40°C to +85°C	
Storage Temperature	-50°C to +95°C	




902.5 MHz / 947.5 MHz Connectorized Ceramic Duplexer



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM902-947D1165-C

Mechanical Drawing:

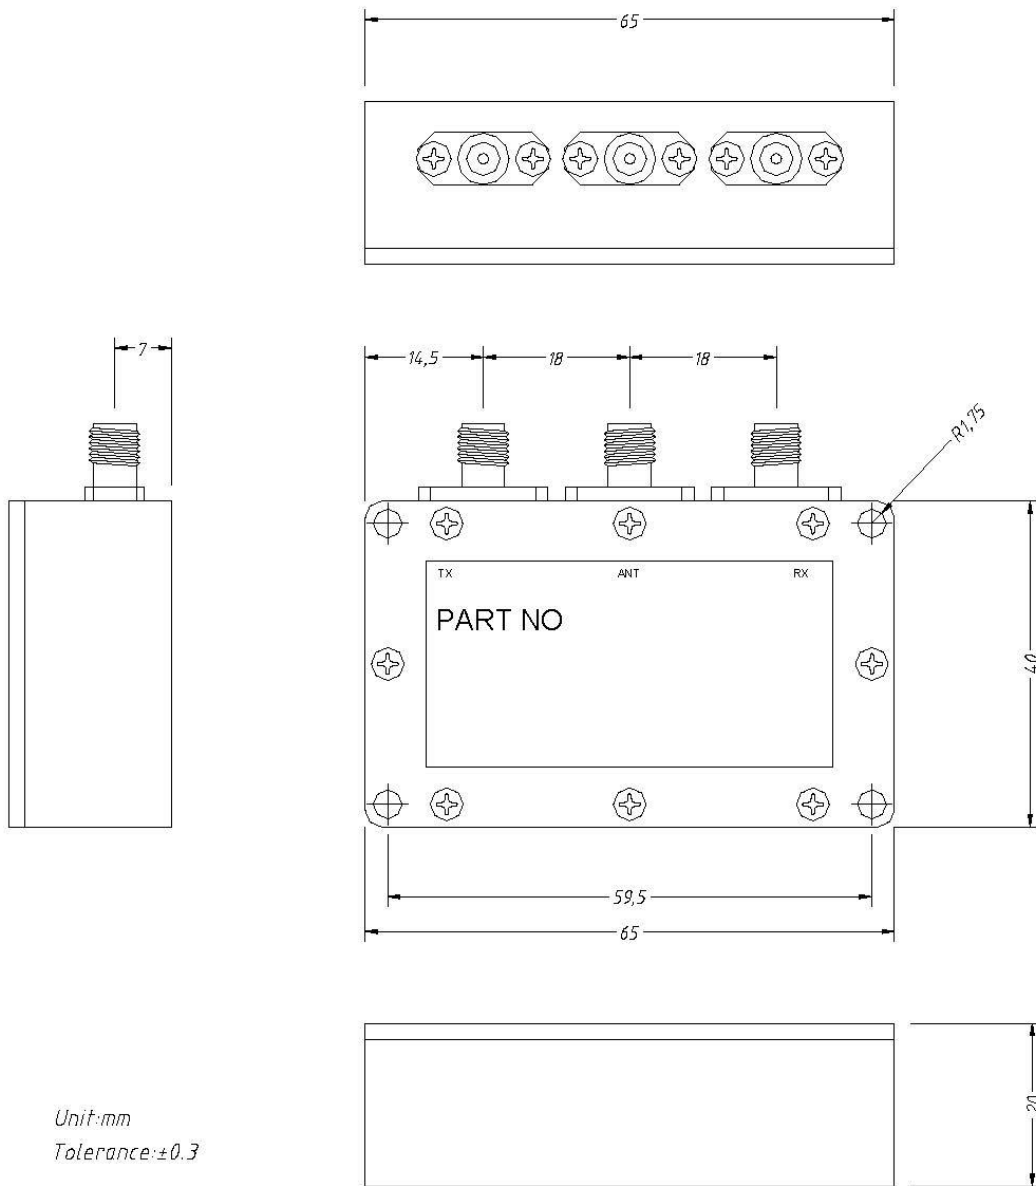

Unit:mm
Tolerance:±0.3