

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Master cable, application: Sensor/actuator box Metal, number of slots: 10, number of positions: 14, slot assignment: single, status display: No; master cable connection: M16 plug connection, PUR/PVC, cable length: 30 m, shielding: no, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1260739

## Commercial data

Item number	1622093
Packing unit	1 pc
Minimum order quantity	2 pc
Note	Made to order (non-returnable)
Sales key	AB37
Product key	ABRDAB
GTIN	4055626009926
Weight per piece (including packing)	3,713.8 g
Weight per piece (excluding packing)	3,641 g
Customs tariff number	85444290
Country of origin	DE

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

## Technical data

### Product properties

Product type	Master cable, assembled
Number of positions	14
Application	Sensor/actuator box
Number of slots	10

### Electrical properties

Nominal voltage $U_N$	48 V AC
	60 V DC

### Signaling

Status display present	No
------------------------	----

### Material specifications

Material	PUR
	Cu alloy
Seal material	NBR
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	TPU
Material of contact surface, master cable side	gold-plated

### Connector

#### Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M16

#### Connection 2

Head design	free cable end
-------------	----------------

### Cable/line

Cable length	30 m
--------------	------


PUR/PVC black [PUR]

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

Dimensional drawing	
Cable weight	111.1 kg/km
UL AWM Style	20549
Number of positions	12
Shielded	no
Cable type	PUR/PVC black [PUR]
Conductor structure signal line	19x 0.15 mm
AWG signal line	22
Conductor cross section	10x 0.34 mm <sup>2</sup> (Signal line) 2x 0.75 mm <sup>2</sup> (power line)
Wire diameter incl. insulation	1.3 mm ±0.1 mm (Signal line) 1.8 mm ±0.1 mm (power line)
External cable diameter	8.6 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, blue, white, green, yellow, gray, pink, red, black, violet, white/pink, pink/brown
Inner sheath thickness	≥ 0.15 mm
Thickness, outer sheath	≥ 0.38 mm
Overall twist	Wires twisted in layers
Nominal voltage, cable	300 V
Test voltage	2000 V
Minimum bending radius, fixed installation	7.5 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	1500000
Flame resistance	DIN EN 50265
Resistance to oil	according to VDE 0472 Part 803
Other resistance	Highly resistant to acids, alkaline solutions and solvents
Special properties	Silicone-free
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation) 80 °C (in acc. with UL)

## Environmental and real-life conditions

Ambient conditions

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 90 °C (cable, fixed installation)

## Mounting

Connection method	Fixed connection
-------------------	------------------

# SAC-14P-30,0-PUR/M16FR - Master cable




1622093

<https://www.phoenixcontact.com/us/products/1622093>

## Drawings

Circuit diagram

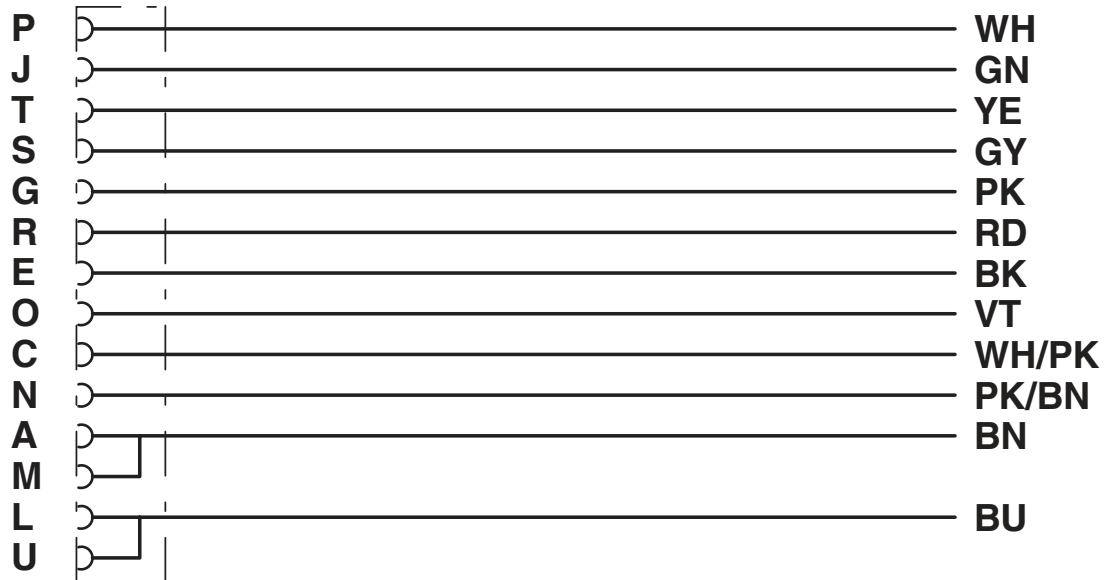

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1622093>



**EAC**

Approval ID: 19060508

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

### ETIM

ETIM 8.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# SAC-14P-30,0-PUR/M16FR - Master cable



1622093

<https://www.phoenixcontact.com/us/products/1622093>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)