SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 60939-3

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 1.0 AMP/90°C, 480 VAC 50-60Hz

1.0 AMP/90°C, 480 VDC

MAXIMUM LEAKAGE CURRENT,

FREQUENCY

MHz

COMMON

dВ

DIFF

dΒ

SHEET SI

.03 | .05

3 | 6 | 11 | 15 | 21 | 24 | 28 | 35 | 40 | 48 | 61

0 | 0

EACH LINE TO GROUND: 0.28 mA @ 277V 60Hz 0.21 mA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -40°C TO +90°C @ RATED CURRENT, I_r . In an ambient, I_0 , Higher than 90°C, the maximum operating current, I_0 , is as follows: $I_0 = I_0 - \sqrt{100 - I_0}$

2.0

5.0 | 10 | 20 | 30

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUSSIDIANCES AND AFFILIATES. IT HAY NOT BE DISCUSSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION.

HARRISBURG, PENNSYLVANIA USA.

53

60 | 78

.15 | .5 | 1.0

5

10 | 15 | 18

.1

0

0

 $I_0 = I_r - \sqrt{\frac{100 - T_0}{10}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +100°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES I_r FOR 8 SECONDS

CATALOG # 1FBH3 ECN# APPRVD DATE

TE TE Connectivity

N□. 2-1609028-8

1FBH3

A

FILTER

290CT19

RFI

TYCO ELECTRONICS PART NO.

DRIG:

1:1

I.In

TEST SPECIFICATIONS:

INDUCTANCE: 0.51 mH NOMINAL

0.51 mH NOMINAL

CAPACITANCE: (MEASURED @ 1 kHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044uF ± 20 % LINE TO LINE: 0.011uF ± 20 % DISCHARGE RESISTOR: 20 MEGOHM

L/G AND L/L L.R.


NO DISCHARGE RESISTOR: 6000MEGOHM (MIN.) 100VDC 20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 2775 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

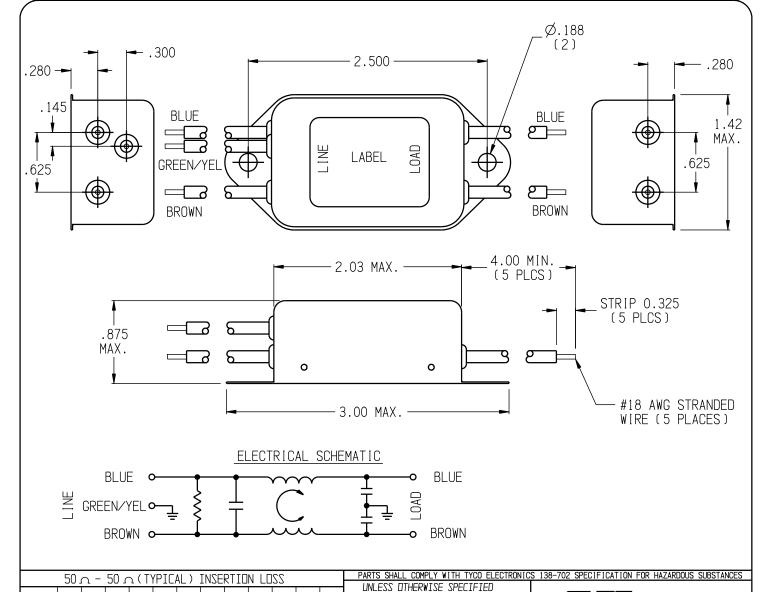

TOLERANCE TO BE ±0.025

NOTES:

1FBH3-A.ckd

MATERIAL & FINISH: AS SUPPLIED