
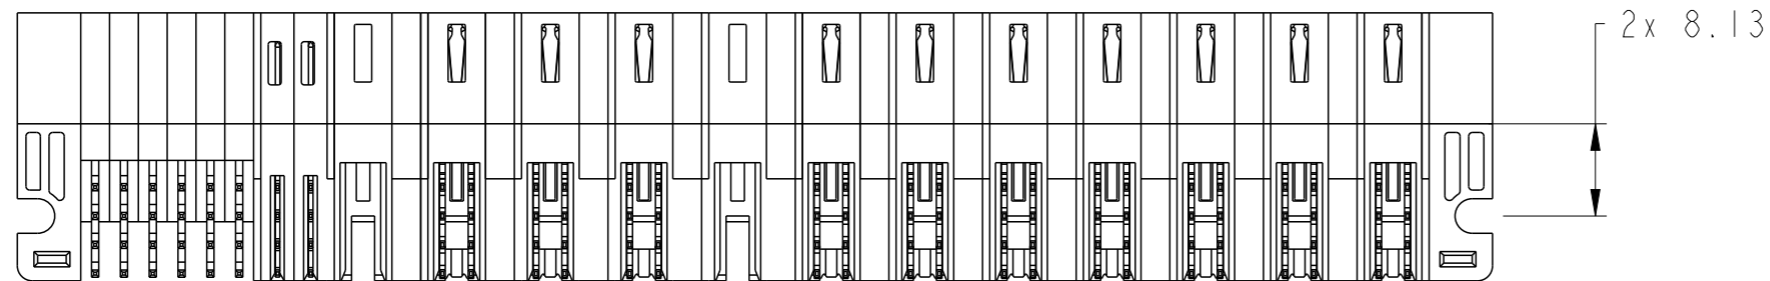
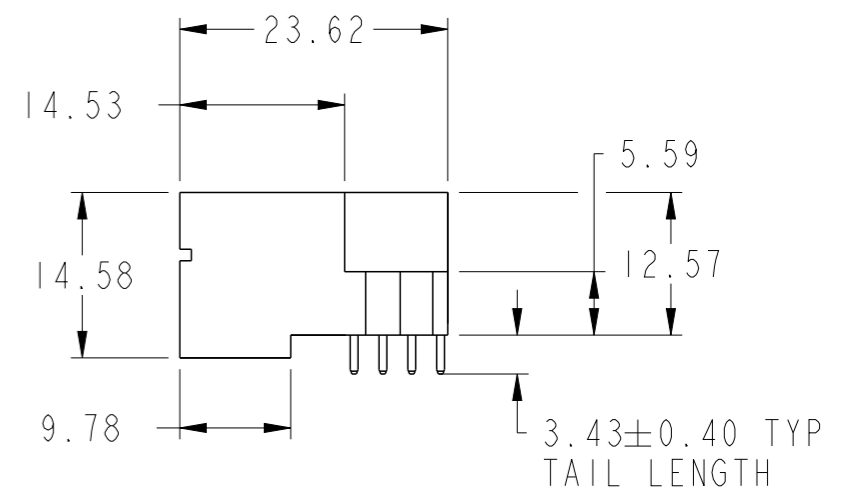
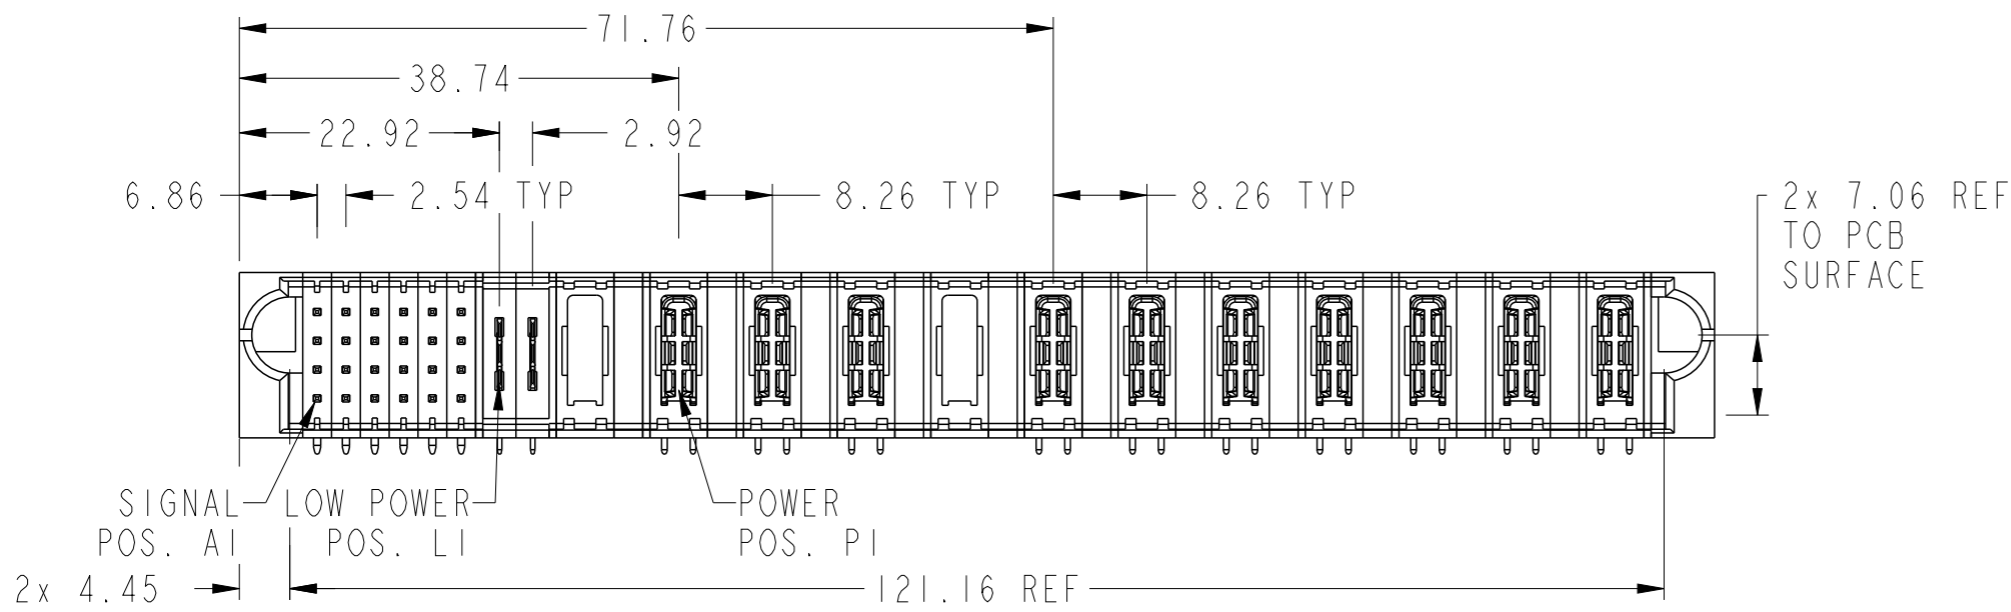



PRODUCT NUMBER SEE SHEET 2

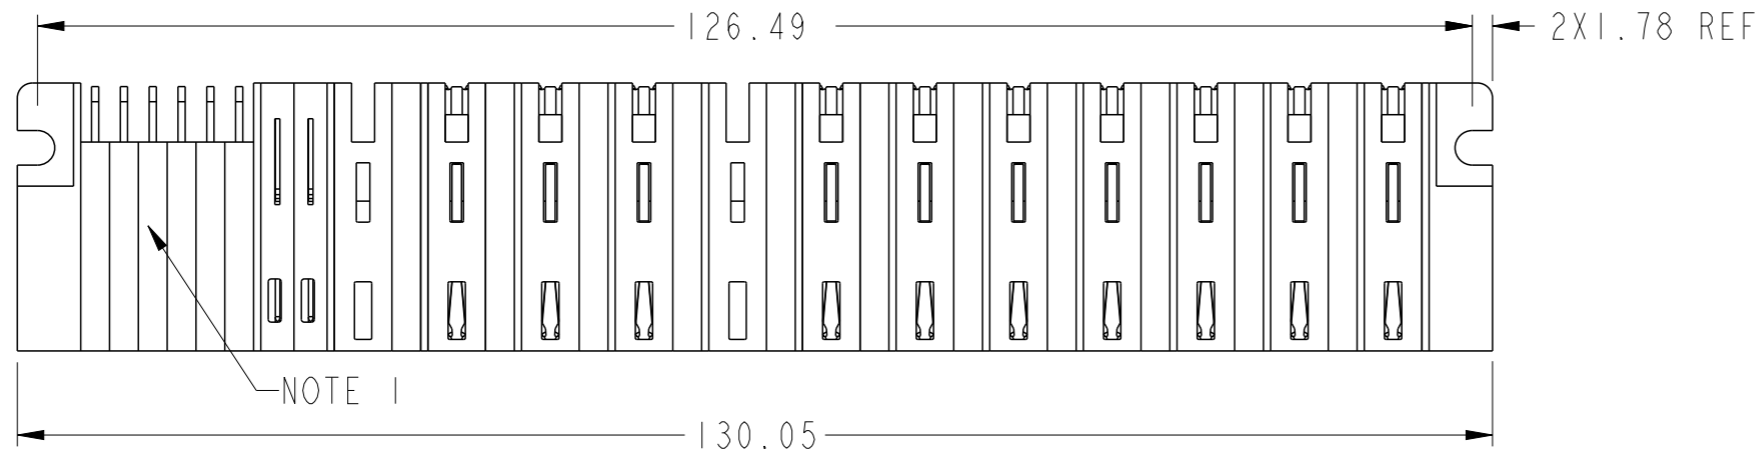

Copyright FCI.

spec ref	*	dr	Rainbow Zhan	2015/10/15	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Vicking Liu	2015/11/30			ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/11/30			product family	PwrBlade+	rel level	Released
surface	<input checked="" type="checkbox"/> linear <input type="checkbox"/> angular	appr	Pei-Ming Zheng	2015/11/30			title 24S+2LP+12ACP RA STB HEADER	dwg no 10106262-C206001	rev A	cat. no. Product - Customer Drw
ASME Y14.5	linear 0.X ±0.5 0.XX ±0.25 0.XXX ±0.10 angular 0° ±2°	www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3		

PRODUCT NO.	ROWS	SIGNAL						LP		HIGH POWER														E2
		E1	1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14		
10106262-C206001LF	DCBA	U	U	U	U	U	U	L	L	L	X	H1	H1	H1	X	H1	H1	H1	H1	H1	H1	H1	H1	

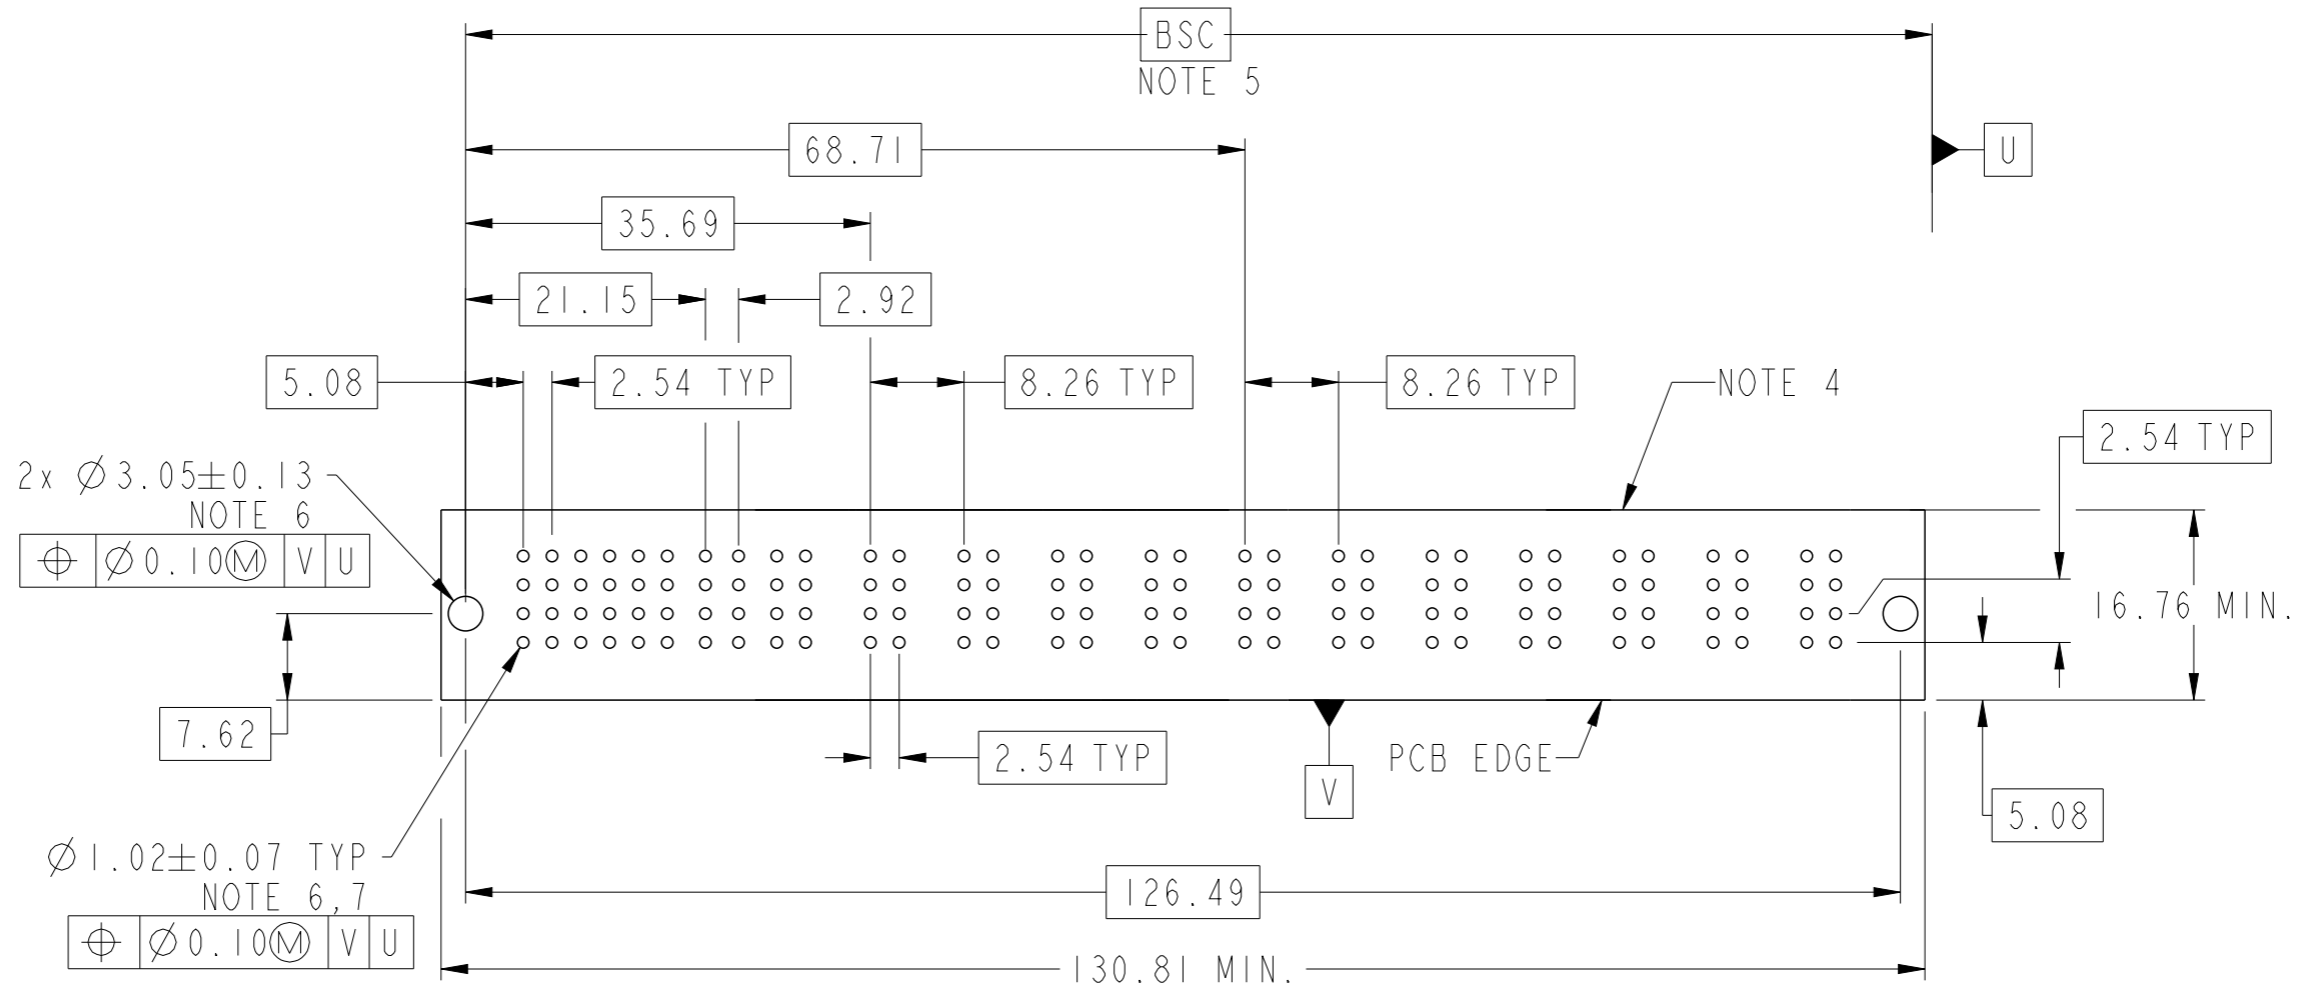

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Rainbow Zhan	2015/10/15	projection	MM	size	A3	scale	3:2
eng	Vicking Liu	2015/11/30			ecn no		-	
chr	Fancy Zhang	2015/11/30			rel level		Released	
appr	Pei-Ming Zheng	2015/11/30	product family		PwrBlade+			
			24S+2LP+12ACP RA STB HEADER			dwg no 10106262-C206001		rev A
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3




Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.



Copyright FCI.

dr	Rainbow Zhan	2015/10/15	projection 	MM 	size	A3	scale	3:2
eng	Vicking Liu	2015/11/30			ecn no	-		
chr	Fancy Zhang	2015/11/30			rel level	Released		
appr	Pei-Ming Zheng	2015/11/30	product family	PwrBlade+				
		24S+2LP+12ACP RA STB HEADER		dwg no 10106262-C206001	rev A			
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			