

Specifications:

Current Rating: 1.5A AC/DC (VBS&GND)
0.25A AC/DC (Others)

Voltage Rating: 30V AC/DC

Contact Resistance: 30m ohm. Max. (VBS&GND)
50m ohm. Max. (Others)

Insulation Resistance: 100M ohm. Min.

Withstanding Voltage: 100V AC For One Minute
Operating Temperature Range: -40°C to +105°C

Material and Finish


Insulator: PBT (UL94V-0)

Insulator Color: Blue

Contact: Phosphor Bronze

Plating: 15u" Gold Plated on Contact Area,
Tin Plated on Solder Tail.

Shell: Brass, Nickel Plated

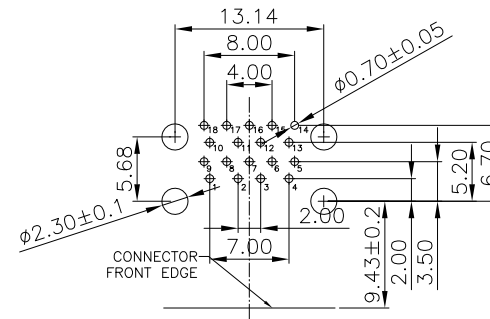

PCB layout (TOP VIEW)

RoHS Compliant

				DRAWN: JAMIE	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED: JERRY	UNIT: MM			DESCRIPTION: USB 3.0 AF Double Rows Right Angle Dip Type, 15u"
				APPROVAL: RORY	SHEET: 1 / 2	PART NO:	A4	
REV	DATE	FILE	BY		PROJECTION:	1003-004-01010		