


P1: M-003


P2: M-028A

Customer No.: No.: 2

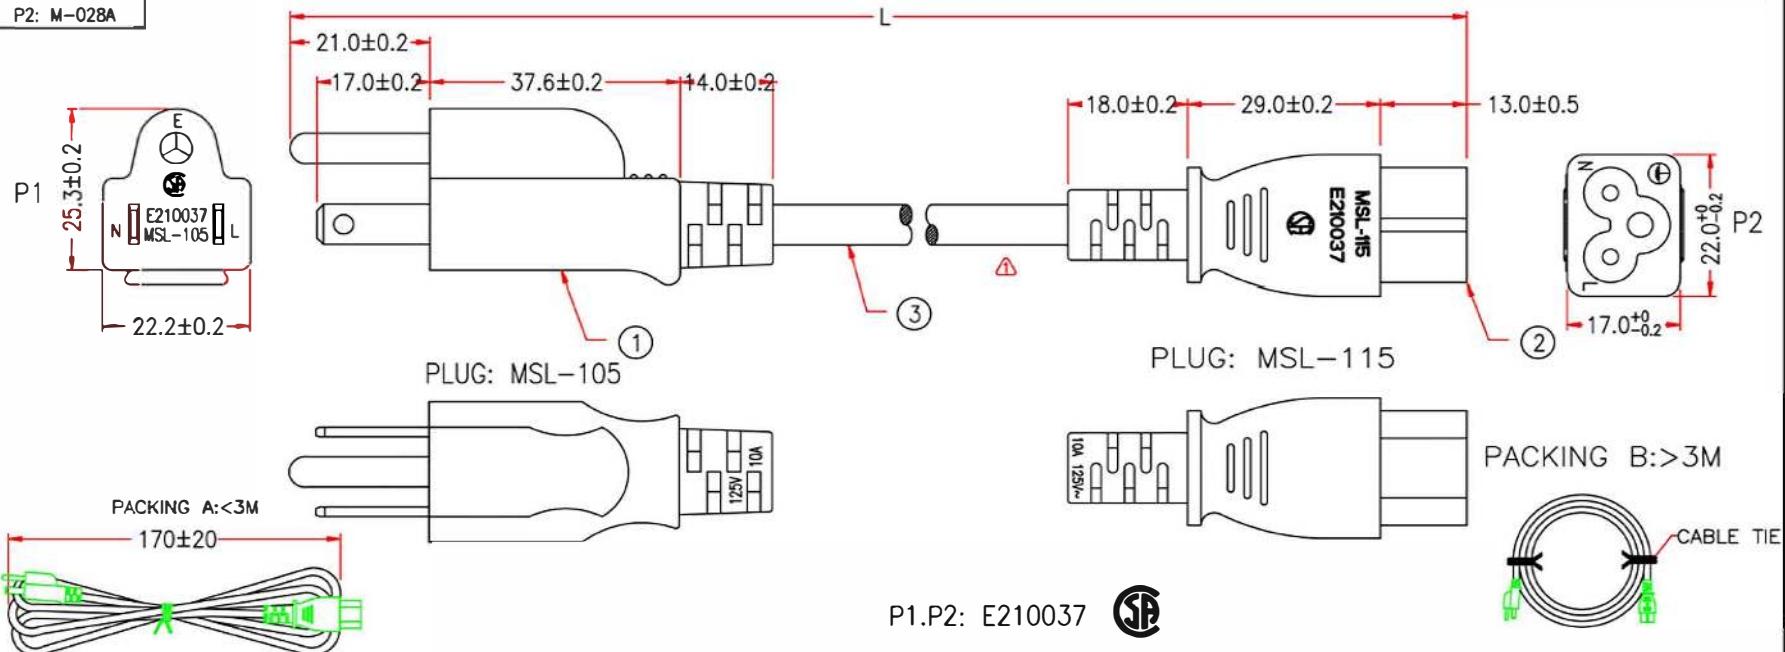

MARKING:  
 (UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978  
 CSA SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

P1.P2: E210037   
 NOTE: All relevant materials are complied with RoHS directive .

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-008	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-008	1	M767
	TERMINAL: 98732PS-0	1	M257
1	TERMINAL: 98714PS-0	2	M257
	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: $\phi$ 4.75mm 321203	1	M769
No.	DESCRIPTION	Q'TY	Supplier

Part # PWCD-515PC5-10A-XXF-BLK

RE.1 2009.10.29 TAKE OFF LABEL

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT  $\pm$ 25mm; Another  $\pm$ 50mm

APPROVED  
 CHECKED DHU 29/OCT/09  
 DRAWING LI 29/OCT/09



UNIT: mm