

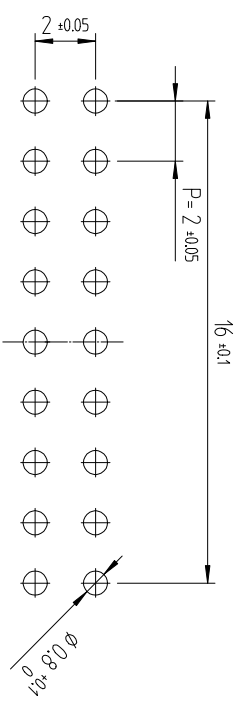
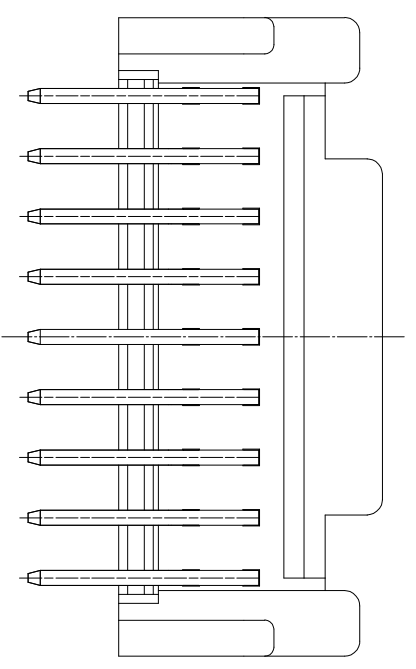
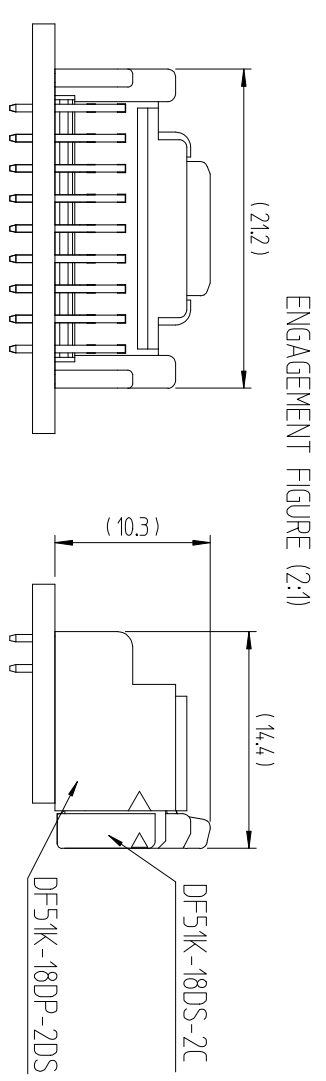
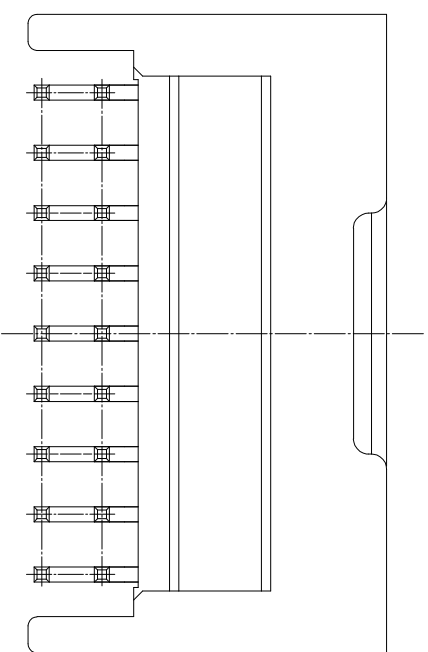


△数	訂正事項	檢圖	年月日	△数	訂正事項	檢圖	年月日
COUNT	DESCRIPTION OF REVISIONS	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	CHKD	DATE
1	RE-6-1150	K.I.Y	18. 07. 04				
1	RE-6-1579	K.I.Y	20. 01. 23				

RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)

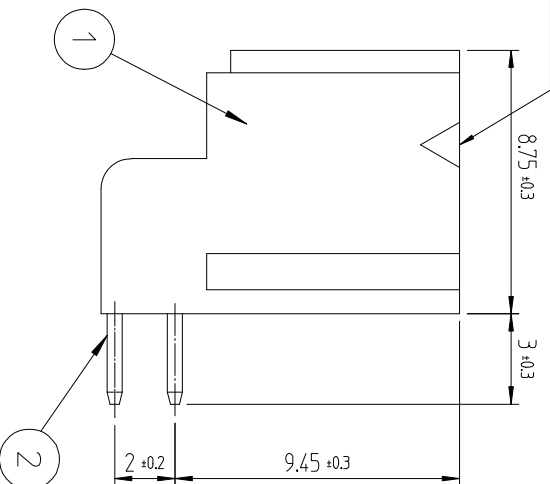

POLARIZATION MARK

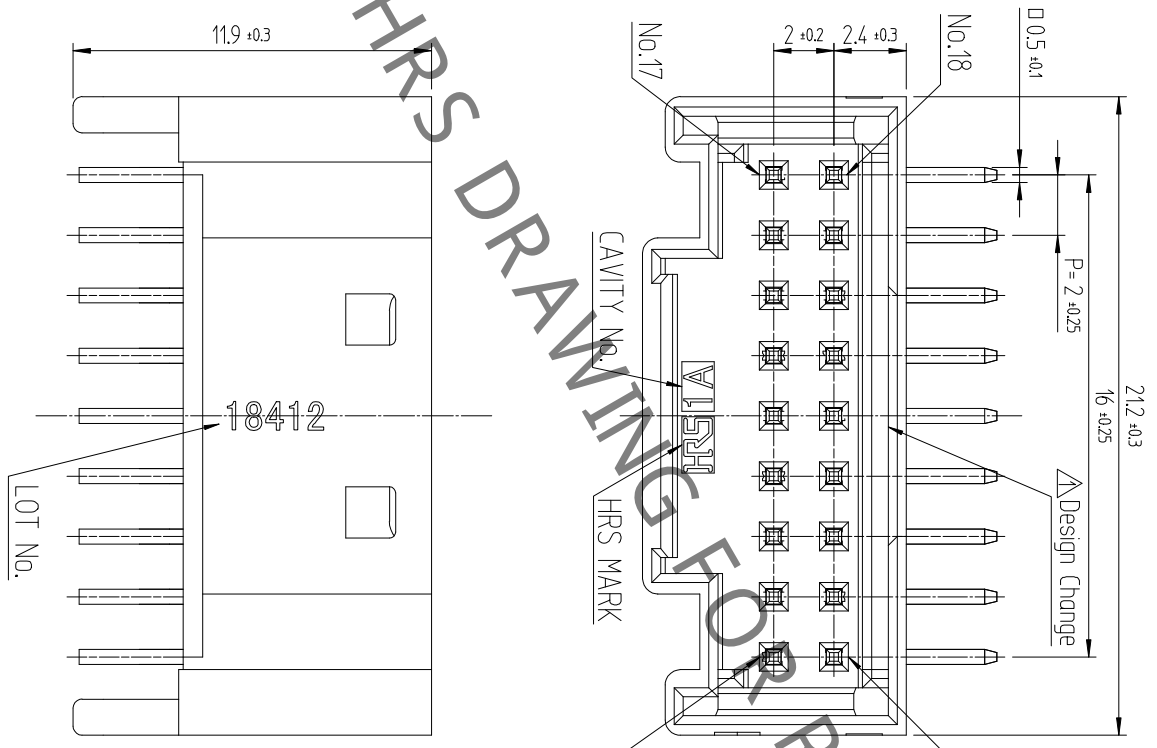

NOTE 1. 1PACK CONTAINS 140PCS.

2. () DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(IE File No. E132750) AUTHORIZATION ARTICLE.

C-UL(IE File No. E132750) AUTHORIZATION ARTICLE.



NO. 1	PBT	UL94V-0, BLACK	NO. 2	BRASS	TIN PLATING 1 μ m MIN, OVER NICKEL 0.5 μ m MIN
MATERIAL		FINISH/REMARKS	MATERIAL		FINISH/REMARKS
CODE NO. (OLD)			CODE NO.		
DRAWN		CHOI (18.03.02) J.S	DESIGNED		CHOI (18.03.02) J.S
CHECKED		LIM (18.03.02) S.M	APPROVED		KANG (18.03.02) T.S
RELEASED			RELEASED		ENG (20.02.12) DEPT
DRAWING NO.		EDC3-632483	PART NO.		DF51K-18DP-2DS (800)
SCALE		4:1	CODE NO.		CL 6652-0051-0-800
UNITS		mm			

1/1