


P.C. solder pin angled with threaded mounting brackets .370

Directive 2002/95/EC  
"RoHS"  
Compliant

( click on the schematic(s) for a more detailed view )

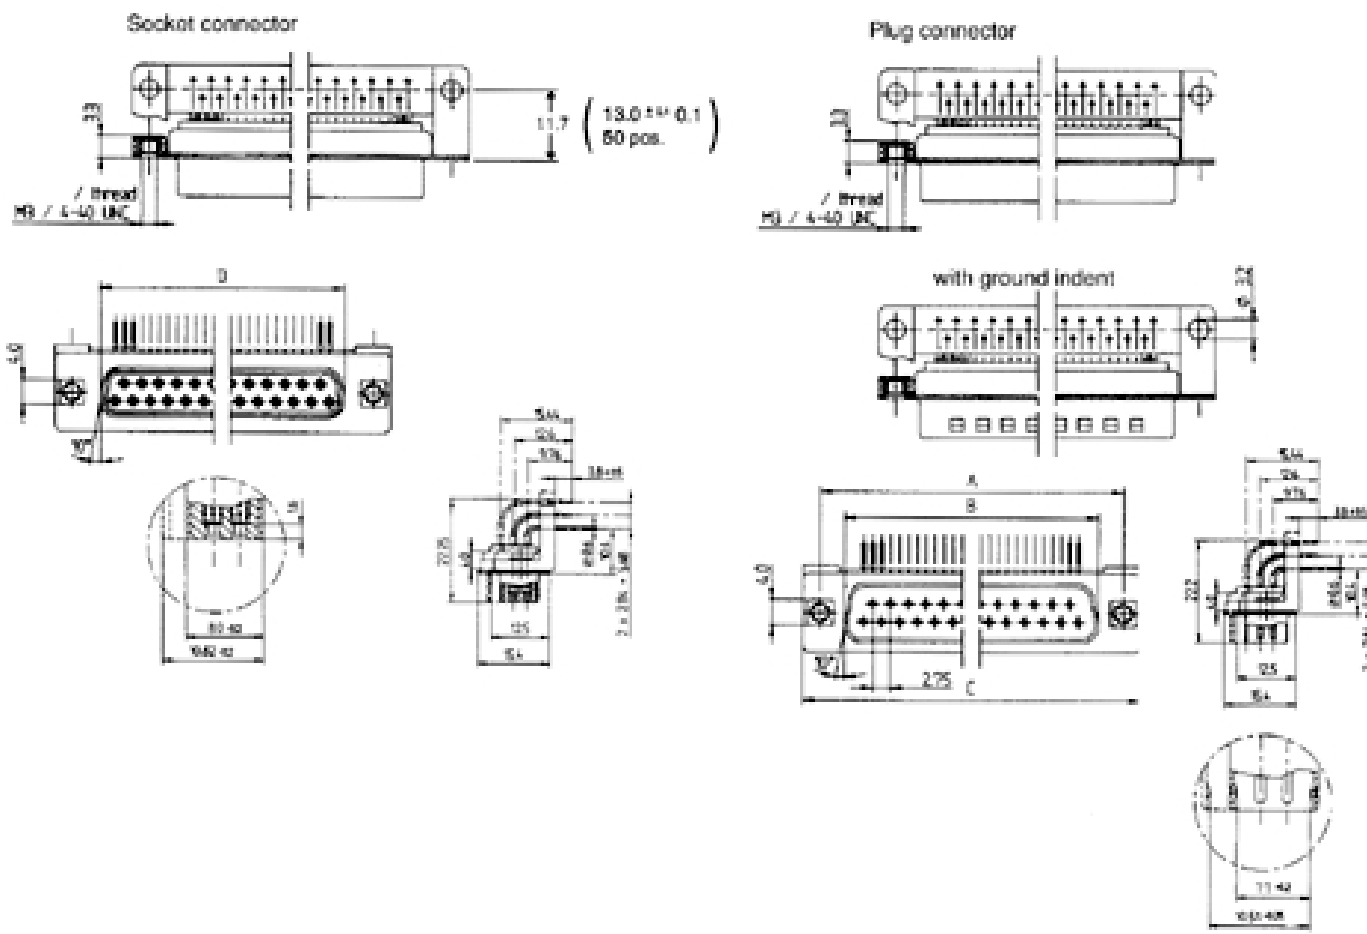

Socket connector:

No. of pos.	A -0,76	B-0,25	C
9	31,19	16,46	25,00 <sup>+0,12</sup> <sub>-0,13</sub>
15	39,52	24,79	33,30 <sup>+0,15</sup> <sub>-0,10</sub>
25	53,42	38,50	47,04 <sup>+0,13</sup>
37	69,70	54,96	63,50 <sup>+0,13</sup>
50	67,31	52,55	61,10 <sup>+0,14</sup> <sub>-0,11</sub>

Plug connector:

No. of pos.	A -0,76	B+0,25	C	D -0,30
9	31,19	16,79	25,00 <sup>+0,12</sup> <sub>-0,13</sub>	6,12
15	39,52	25,12	33,30 <sup>+0,15</sup> <sub>-0,10</sub>	6,12
25	53,42	38,84	47,04 <sup>+0,13</sup>	5,99
37	69,70	55,30	63,50 <sup>+0,13</sup>	5,99
50	67,31	52,68	61,10 <sup>+0,14</sup> <sub>-0,11</sub>	5,99

Part Numbers

No. of Pos.	Socket connector tin - plated	
	UNC 4 - 40	M 3
9	164 A 10719 X	164 A 10769 X
15	164 A 10729 X	164 A 10779 X
25	164 A 10739 X	164 A 10789 X
37	164 A 10749 X	164 A 10799 X
50	164 A 10759 X	164 A 10809 X

No. of Pos.	Plug connector tin - plated with ground indent	
	UNC 4 - 40	M 3
9	163 A 11769 X	163 A 11819 X
15	163 A 11779 X	163 A 11829 X
25	163 A 11789 X	163 A 11839 X
37	163 A 11799 X	163 A 11849 X
50	163 A 11809 X	163 A 11859 X