

т	<u>م</u>	г	п	0



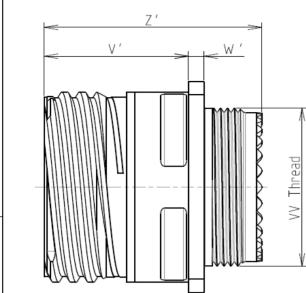

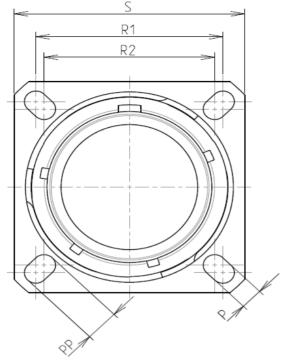

CHARACTERISTICS

4

ω

 \sim

_

ם ד ו	т (П	D	0	₿ >		
Z'			<image/> <image/>	AMPLE		4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Keying Shown as example Connector dimension Dim Nominal					
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max		SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati Country FR	ch does not comply with the Parties or by a third party on, technical notice.)		2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C	VV THREAD M18x1-6g		PN: 8D013N	103PD		_
-Salt Spray : 2000 hours		A 15-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	
BASIC SERIES: 8D 0 - 13 M SHELL TYPE : Square Flange Receptacle	1 03 P D	SCALE	General linear Tolerances:	Receptacle 8D series NPRDS / PROJECT 859		- 1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	CONTACT TYPE : PIN(500			communicated without p	uced or permission	
PLATING : M = Nickel	F E	D	SOURIAU 8D013M0 C		SHEET	

r	<u>т</u>	G	г	m	D	0	
		Contact Layout					Panel Cutou
4		03 ())) 3#16				SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					
ω						ØA ØAA R1 ØT	A
	F						
						SOURIAU shall not be I due to a use of the I the Specifications issued (professional re	Products wh by either of
N							Countr FR
						PN: 8	D013N
					A 15-1	0-2016 First Release	
					ISS D Designed By:	ATE Latest modification - by Date:	
					TITL	E Co	omposite
<u> </u>					SCALE		neral linear plerances: ±
					SOUR	IAU WWW.SOU	JRIAU.C
					FORMAT A3		URIAU 0013M
L	Н	G	F	E	D	C	

