
### SPECIFICATION CONTROL DRAWING

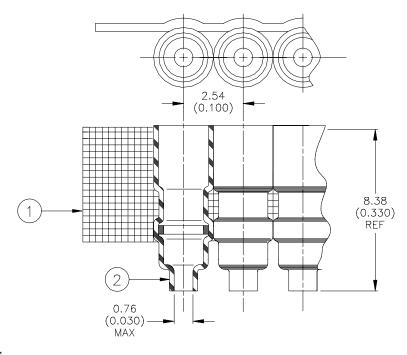

### **MATERIALS**

- 1. SOLDERSLEEVE: D-141-07. Quantity Per Assembly: 1000
- 2. CARRIER STRIP: Adhesive Coated High Temperature Tape


## **APPLICATION**

- 1. This part is designed for used on Cinch "Tykon" miniature connector 255-20-30-200.
- 2. Sleeves are to be installed using Rayclad AD-1309 wire assembly fixture and IR-1005 infrared heater.
- 3. The carrier strip is to be removed upon completion of termination.


  Sleeve and Terminal Assembly

# STRIP LENGTH: 4.70±0.38 (0.185±0.015) D-141-07 SOLDERSLEEVE WIRE (0.330) 3.96 (0.156) STRIPPED WIRE BOTTOMED ON SLEEVE PIN

# **Terminal Configuration**



Untwist and Straighten Length



Electronics		Raychem		Tyco Electronic 300 Constitutio Menlo Park, Ca	onal Drive	TITLE: SOLDERPAK ASSEMBLY, CINCH "TYKON" SERIES 255-XX-30-200 ALTERNATE PINS				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: <b>D-711-00</b>				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROU	t			to amend this drawing at any luate the suitability of the ation.	DATE: 18-July-00		DO	OOC ISSUE:	
DRAWN BY: M. FORONDA		CAGE CODE: 06090		REPLACES: N/A	DCR NUMBER: D000403	PROD. REV.: D	SCALE: None		SIZE:	SHEET: 1 of 1