

### Features

- The Reference Input Voltage tolerance is 0.5%
- Sink Current Capability of 0.1mA to 100 mA
- Low Output Noise Voltage and Fast Turn On Response
- Temperature Compensated for Operation over Full Rated Operating Temperature Range
- Epoxy Meets UL 94 V-0 Flammability Rating
- Moisture Sensitivity Level 1
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)


### Maximum Ratings

Parameter	Symbol	Value	Unit
Cathode Voltage	$V_{KA}$	37	V
Cathode Current Range	$I_K$	-100~150	mA
Reference Input Current Range	$I_{REF}$	0.05~10	mA
Power Dissipation at 25 °C	$P_D$	0.77	W
Thermal Resistance junction to ambient	$R_{\theta JA}$	162	°C/W
Junction Temperature	$T_J$	0~150	°C
Operating Temperature	$T_{opr}$	0~70	°C
Storage Temperature Range	$T_{STG}$	-65~150	°C

### Recommended Operating Conditions


Parameter	Symbol	Min	Max	Unit
Cathode Voltage	$V_{KA}$	$V_{REF}$	36	V
Cathode Current Range	$I_K$	1	100	mA

Marking Code: TL431

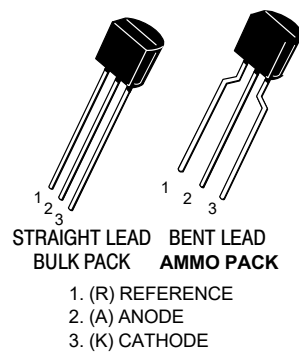

# Programmable Precision Regulator

## TO-92

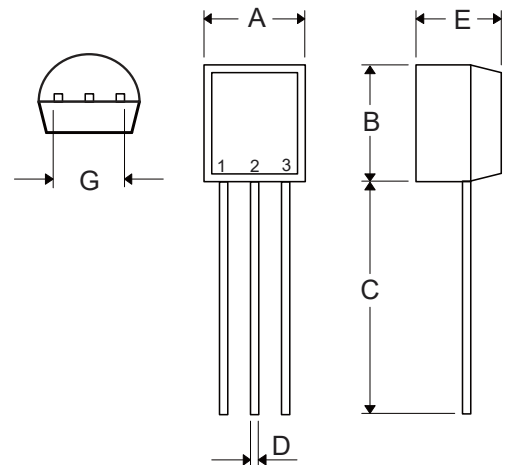

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	0.169	0.185	4.30	4.70	
B	0.169	0.185	4.30	4.70	
C	0.500	-----	12.70	-----	
D	0.015	0.022	0.38	0.55	
E	0.130	0.146	3.30	3.70	
G	0.095	0.105	2.42	2.67	Straight Lead
	0.173	0.220	4.40	5.60	Bent

**Electrical Characteristics @ 25°C (Unless Otherwise Specified)**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reference Input Voltage	$V_{ref}$		2.4875	2.5	2.5125	V
Deviation of reference Input Voltage	$V_{ref(dev)}$	$T_{min} \leq T_a \leq T_{max}$		4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\frac{\Delta V_{ref}}{\Delta V_{KA}}$	$\Delta V_{KA}=10V \sim V_{ref}$		-1.0	-2.7	
		$\Delta V_{KA}=36V \sim 10V$		-0.5	-2.0	
Reference Input Current	$I_{ref}$	$I_{KA}=10mA$ , $R_1=10K\Omega$ , $R_2=\infty$		1.5	4.0	$\mu A$
Deviation of Reference Input Current Over Full Temperature Range	$\frac{\Delta I_{ref}}{\Delta T}$	$I_{KA}=10mA$ , $R_1=10K\Omega$ , $R_2=\infty$ $T_A=full\ Temperature$		0.4	1.2	$\mu A$
Minimum Cathode Current for Regulation	$I_{KA(min)}$			0.45	1.0	mA
Off-State Cathode Current	$I_{KA(off)}$	$V_{KA}=36V$ , $V_{REF}=0V$		0.05	1.0	$\mu A$
Dynamic Impedance	$Z_{KA}$	$I_{KA}=10\ to\ 100mA$ , $f \leq 1.0KHz$		0.15	0.5	$\Omega$

Curve Characteristics

Figure 1. Test Circuit for  $V_{KA} = V_{ref}$




Figure 2. Test Circuit for  $V_{KA} > V_{ref}$

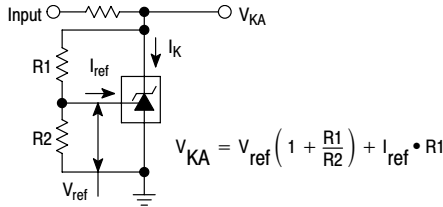


Figure 3. Test Circuit for  $I_{off}$




Figure 4. Cathode Current versus Cathode Voltage

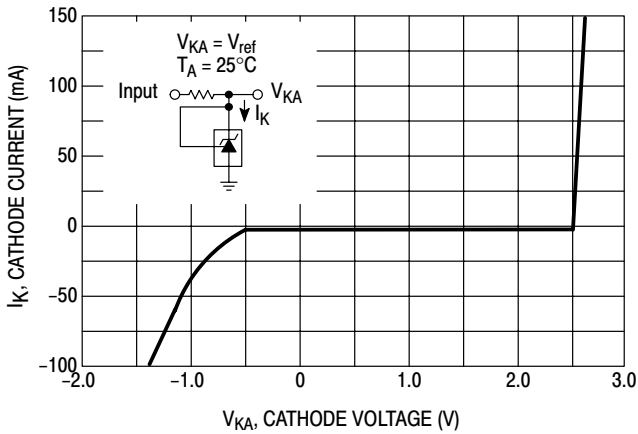


Figure 5. Cathode Current versus Cathode Voltage

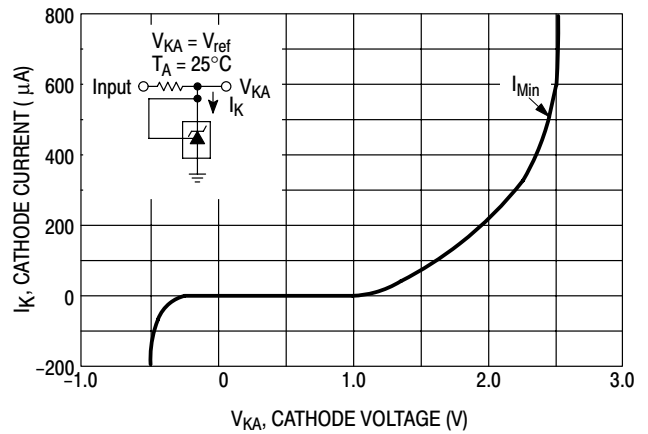


Figure 6. Reference Input Voltage versus Ambient Temperature


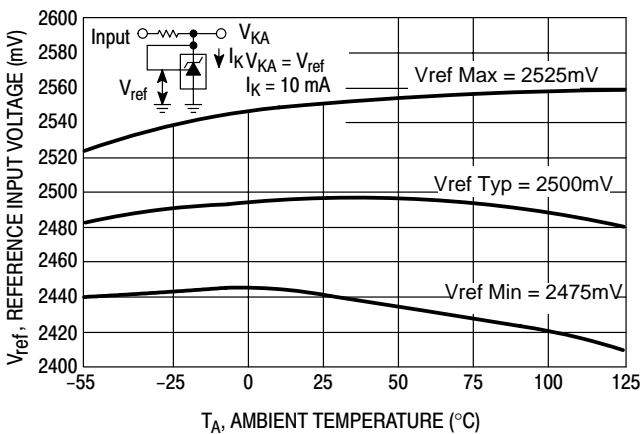


Figure 7. Reference Input Current versus Ambient Temperature

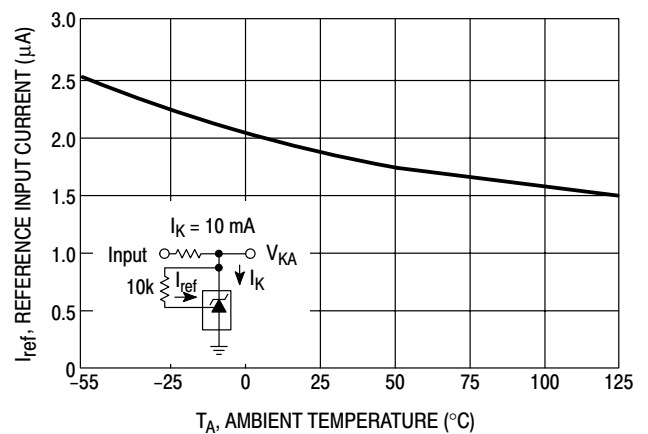

Curve Characteristics

Figure 8. Change in Reference Input Voltage versus Cathode Voltage

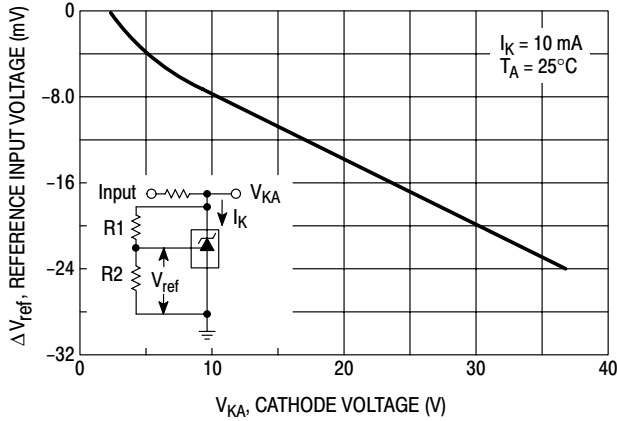


Figure 9. Off-State Cathode Current versus Ambient Temperature

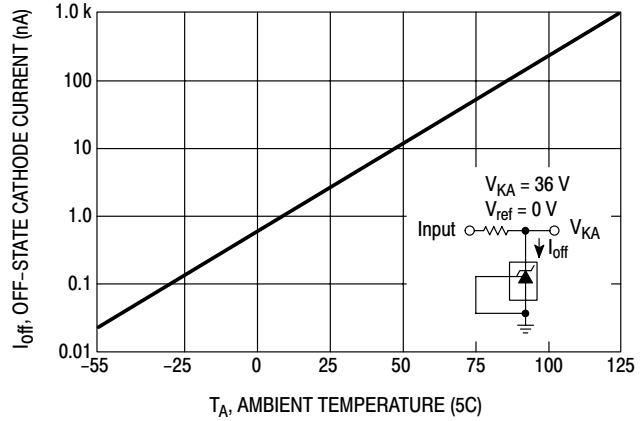


Figure 10. Dynamic Impedance versus Frequency

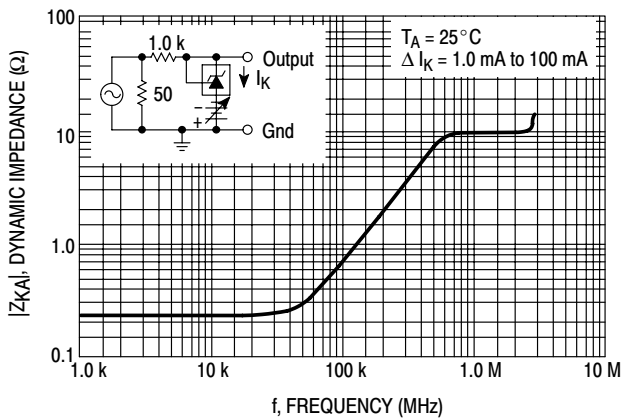


Figure 11. Dynamic Impedance versus Ambient Temperature

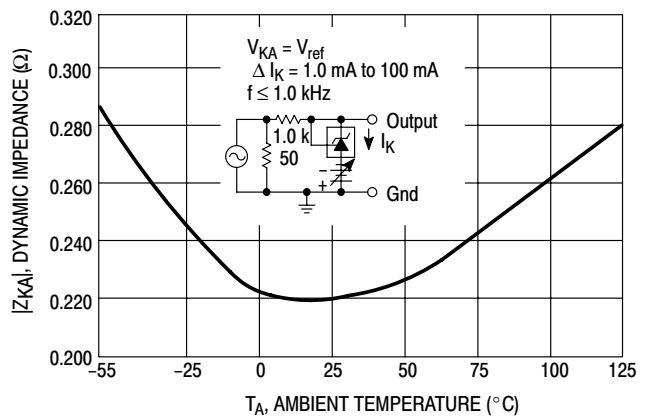


Figure 12. Open-Loop Voltage Gain versus Frequency


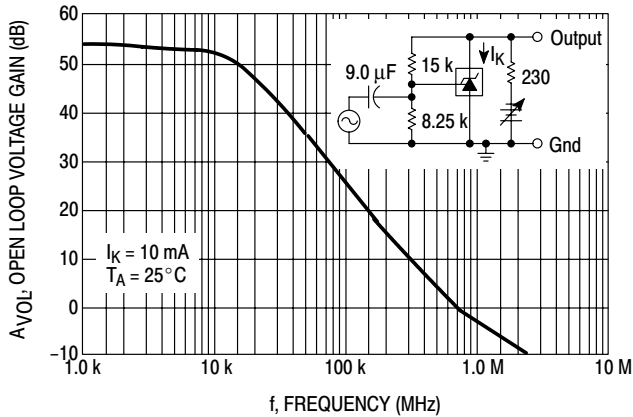


Figure 13. Spectral Noise Density

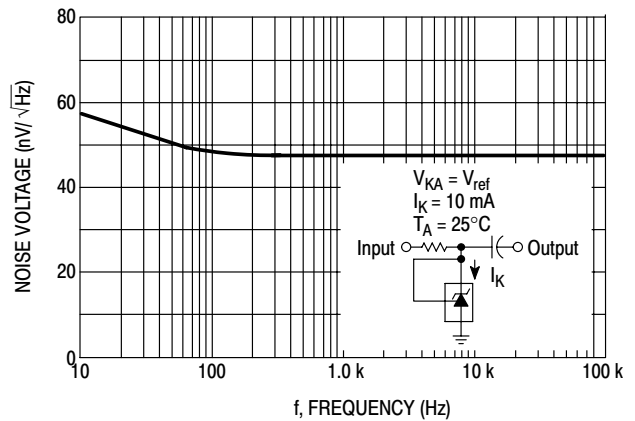

## Ordering Information

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note : Adding "-HF" Suffix for Halogen Free, eg. Part Number-BP-HF  
 Adding "-HF" Suffix for Halogen Free, eg. Part Number-AP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.