



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		C		EC 0G3C 0734 04	16DEC04	BSV	JG	

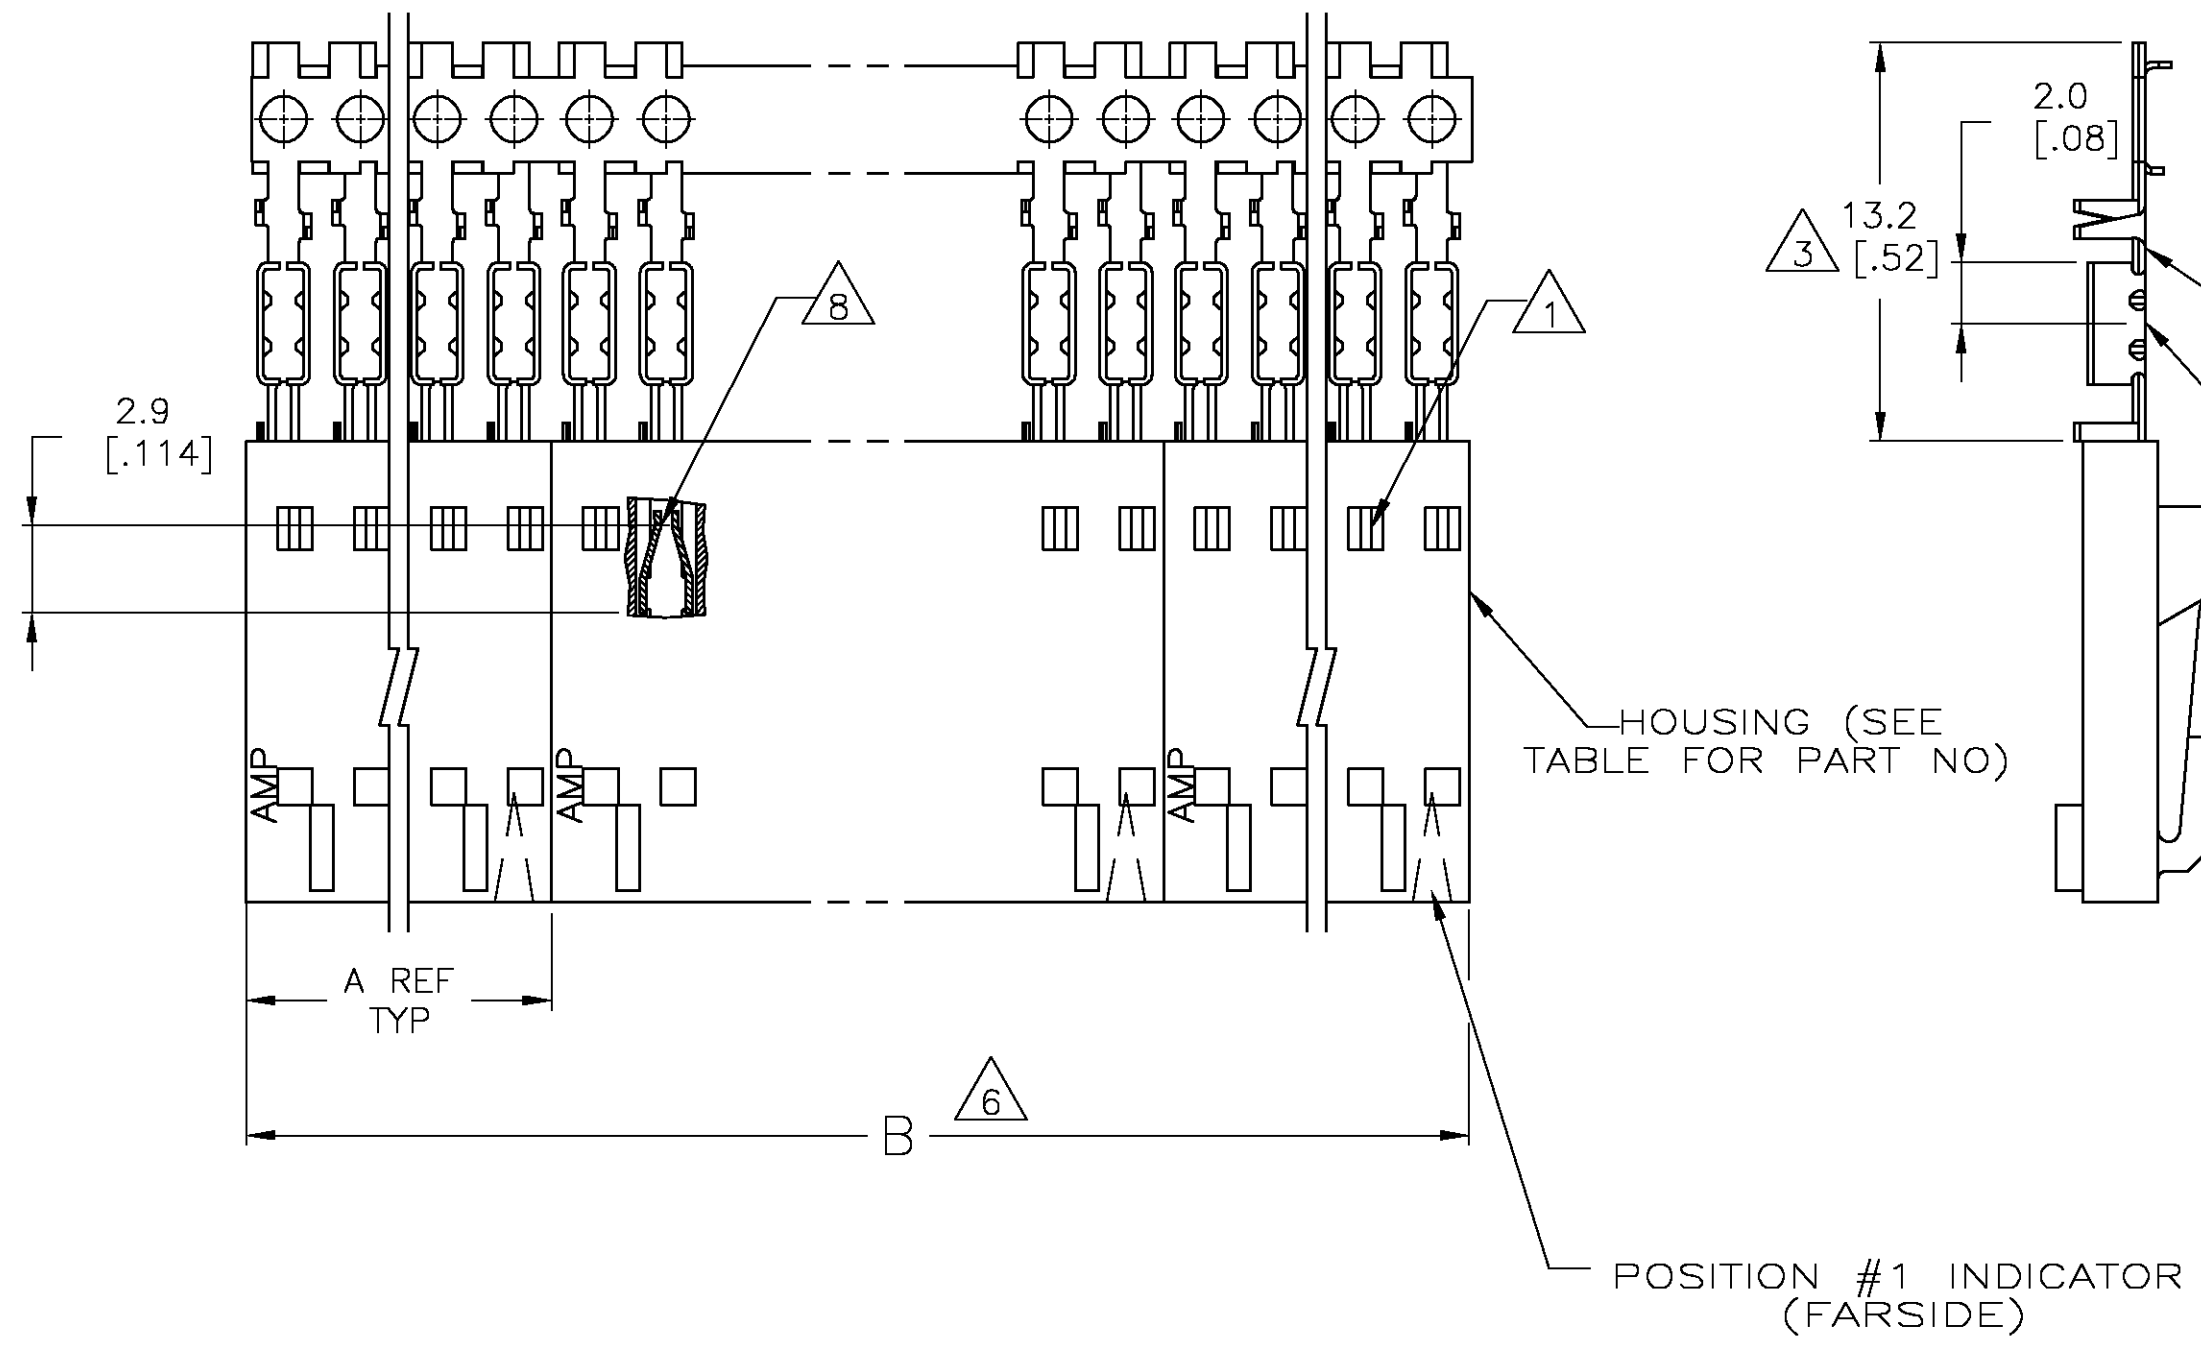

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #22-#26 AWG WIRE SIZE, 1.37[.054]/0.76[.030] INSULATION DIAMETER, 0.38[.015] MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 HOUSING MAT'L: FLAME RETARDANT POLYCARBONATE. COLOR: BLACK. CONTACT MAT'L: PHOS BRONZE.
- 7 CONTACT FINISH: 000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 8 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 9 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 10 .000100-.000200 MATTE TIN OVER .000050 NICKEL

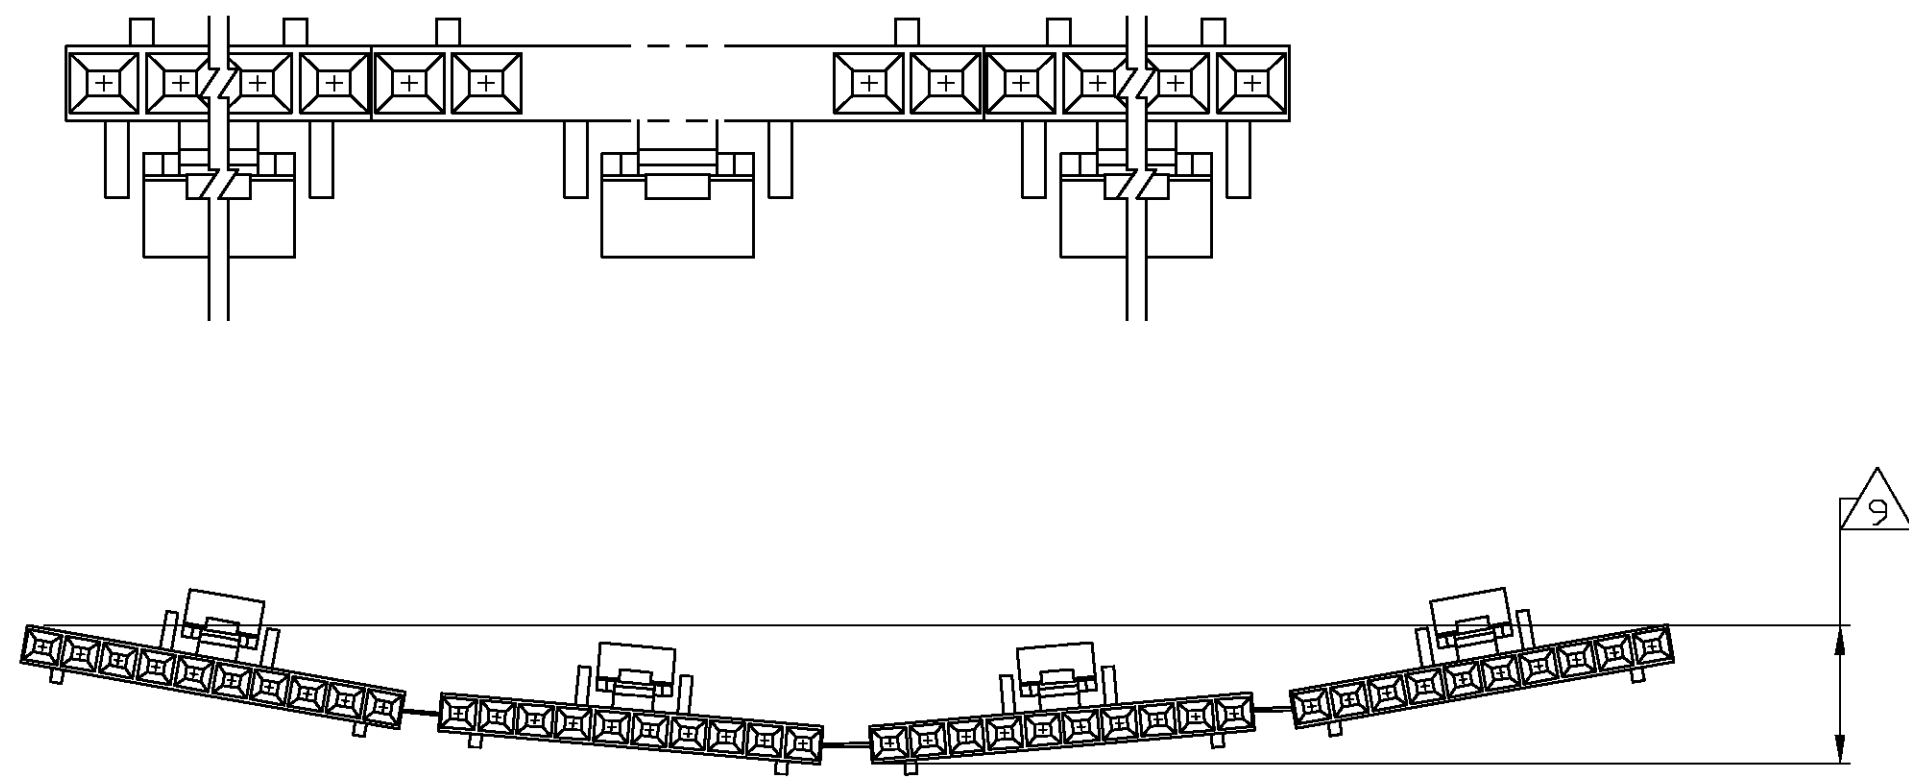

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

10	2	25.3 [.996]	12.65 [.498]	104920-4	5	5-104922-4
7	2	25.3 [.996]	12.65 [.498]	104920-4	5	104922-4
PLATING	5	B	A	HOUSING PART NUMBER	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. HERRINGTON	2-27-95	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHK	J. GESFORD	2-27-95	
APVD	D. DUPLER	2-27-95	
PRODUCT SPEC	108-25034		NAME
APPLICATION SPEC	114-25026		RCPT ASSY, AMPMODU MTE, SINGLE ROW, 2.54[.100] C/L, LATCHED & POLARIZED FOR #22-#26 AWG WIRE SIZE, STRIP FORM, SPECIAL
MATERIAL	SEE TABLE	WEIGHT	SIZE
			CAGE CODE
			DRAWING NO
			RESTRICTED TO
			A2 00779 C=104922
			SCALE
			4:1
			SHEET
			1 OF 1
			REV
			C