


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	NEW RELEASE	4MAY07	RG	DO

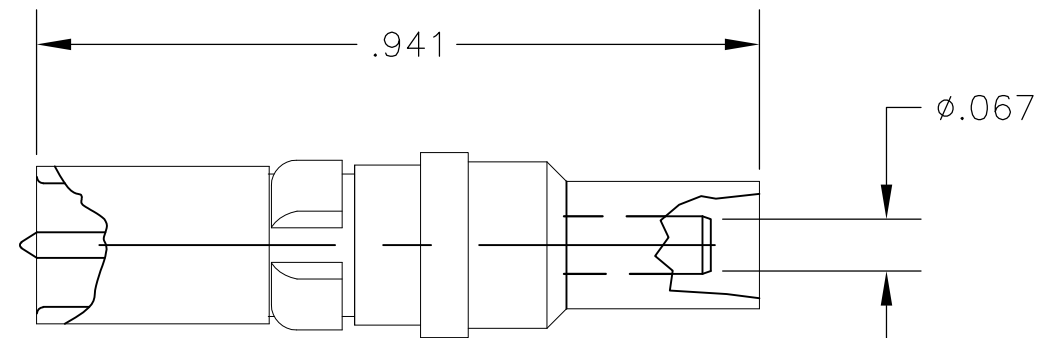

1. PART NUMBER CHANGES AND/OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

2. ITEMS PROVIDED TO THIS SPECIFICATION TO BE PERMANENTLY IDENTIFIED ON THE CONTAINER WITH THE FOLLOWING IDENTIFIER:
 YEAR WEEK

TYCO PART NUMBER DATE CODE (e.g. 0212)
 XXXXXXXX-X XXXX

3. MECHANICAL PROPERTIES:
 RETENTION IN SHELL: 15 LBS MIN.

4. ELECTRICAL CHARACTERISTICS:
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS
 OPERATING FREQUENCY RANGE: 0-900 MHz
 IMPEDANCE: 50 OHMS

AS SHOWN	1926442-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	R.GRZYBOWSKI	04MAY2007	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK	D.ORRIS	4MAY07	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S.FLICKINGER	4MAY07	CONTACT, COAXIAL, SOCKET 50 OHM STRAIGHT/SOLDER/CRIMP			
0 PLC ± -		PRODUCT SPEC	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ± -		APPLICATION SPEC	-		A3	00779	C-1926442	-
2 PLC ± .02		WEIGHT	-		CUSTOMER DRAWING			SCALE
3 PLC ± .010		MATERIAL		-		1:1		SHEET
4 PLC ± -		FINISH		-		1 OF 1		REV
ANGLES ± .5		-		-		A		