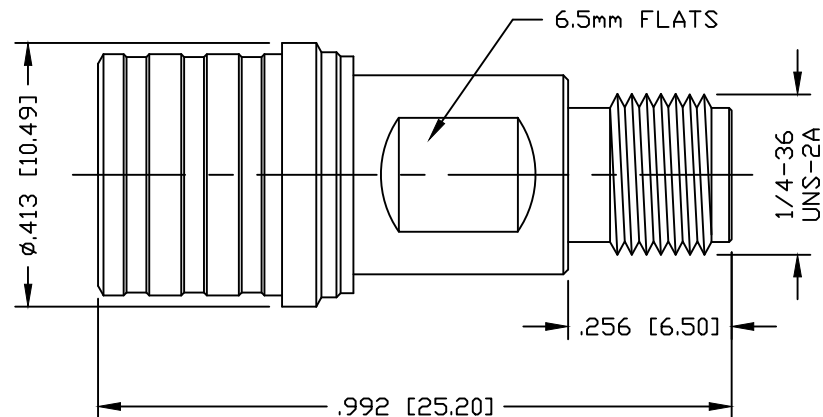


PART NO.

**ROA-5405-LP**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/26/18	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-11 GHz

VSWR:  $\leq 1.052$  @ 4 GHz;  $\leq 1.173$  @ 6GHz3rd ORDER IM:  $< -155$  dBc

DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN.

INSULATION RESISTANCE: 5000M $\Omega$ 

TEMPERATURE RANGE: -65°C TO 165°C

5	COLLET RING	1	BeCu	WHITE BRONZE
4	COUPLING NUT	1	BRASS	WHITE BRONZE
3	CONTACT	1	PHOS. BRONZE	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE

#	DESCRIPTION	QTY	MATERIAL	FINISH
---	-------------	-----	----------	--------

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]DRAWN  
C. ZUNIGA 03/26/18

CHECKED

ORJ DRAWN  
C. ZUNIGA 03/26/18**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.

**RFconnectors**7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
(858) 549-6345 FAX**QMA PLUG TO  
SMA JACK ADAPTER**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	<b>RQA-5405-LP</b>	---

SCALE:	ENGINEERING ID:	SHEET	OF
NTS	000000	1	1