

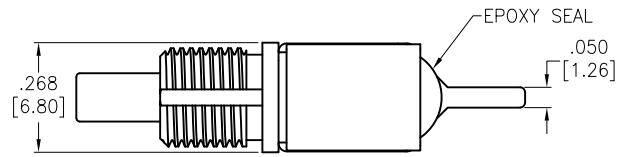
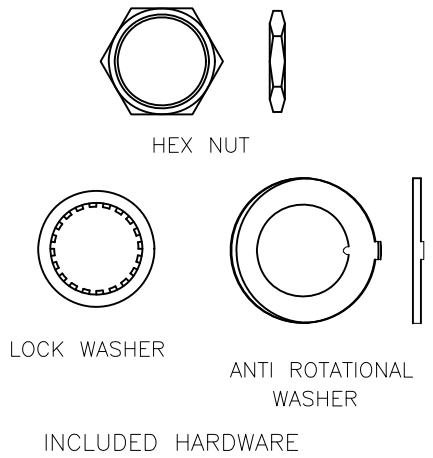

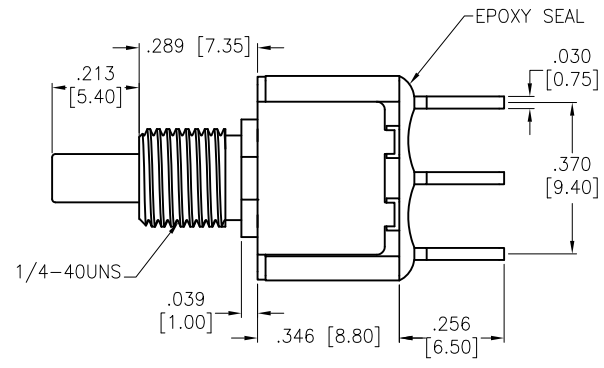


6	5	4	3	2	1		
APPROVED: _____			Rev	AWO #	Description	Date	Appr
DATE: _____ TITLE: _____			-		RELEASED	2/8/21	



SPECIFICATIONS:

Material:
Movable Contact: Copper Alloy, Silver Plated
Terminal: Copper Alloy, Silver Plated

Electrical:
Voltage rating: 120VAC or 38VDC
Current rating: 1 Amps
Contact resistance: 10 mΩ max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500V RMS @Sea level
Temperature Rating:
Operating temperature: -30°C to +85°C

Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	LH	2/8/21
CHECKED	AC	2/8/21
APPROVED		

ADAM TECH 909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SNAP-ACTING PUSHBUTTON SWITCH,
SPDT, ON-MOMENTARY, SILVER PLATED, PCB TYPE

SIZE X	PART NO. SW-PB8-AB00A2QE-1	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1