


MAG-MATE

TE Internal #: 2120745-2 Magnet Wire Terminals, Multispring Pin, .4 – .63 mm Magnet Wire, 26 – 23 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE

View on TE.com >

Terminals & Splices > Magnet Wire Terminals

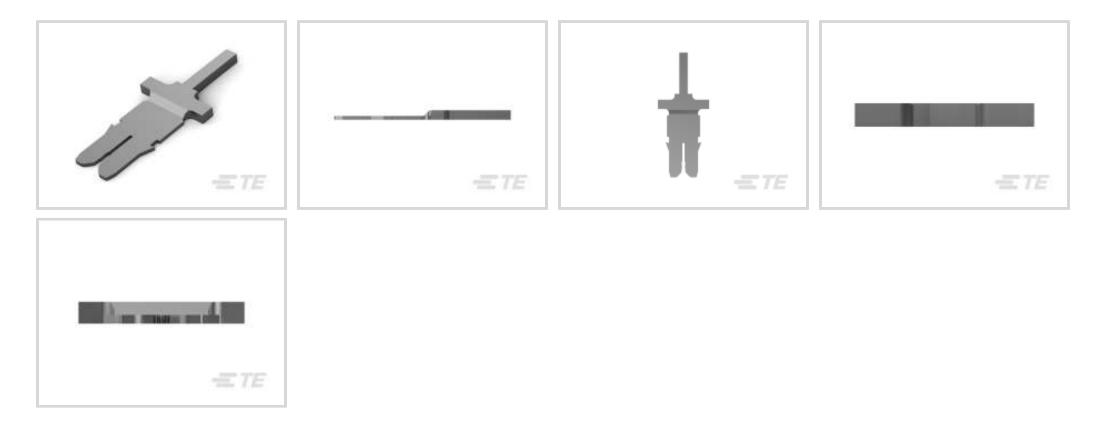

Magnet Wire Terminal Type: Multispring Pin Mating Tab Thickness: .81 mm [.032 in]

Mating Pin Diameter: .8 mm [.031 in]

Magnet Wire Size: .4 – .63 mm

Features

Product Type Features



Compatible With Discrete Wire Type	Magnet Wire, Solid	
Contact Features		
Magnet Wire Terminal Type	Multispring Pin	
Mating Tab Thickness	.81 mm[.032 in]	
Mating Pin Diameter	.8 mm[.031 in]	
Terminal Plating Material	Tin	
Terminal Orientation	Straight	
Termination Features		
Termination Method to Wire & Cable	Insulation Displacement (IDC)	
Dimensions		
Terminal Height	8.1 mm[.31 in]	
Magnet Wire Size	.4 – .63 mm	
Stock Thickness (Magnet Wire Side)	.32 mm[.013 in]	
Product Length	14.8 mm[.582 in]	

Magnet Wire Terminals, Multispring Pin, .4 – .63 mm Magnet Wire, 26 – 23 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



Usage Conditions

Insulation Option	Uninsulated	
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]	
Operation/Application		
Compatible With Wire Base Material	Copper	
Packaging Features		
Packaging Method	Reel	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Magnet Wire Terminals, Multispring Pin, .4 – .63 mm Magnet Wire, 26 – 23 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



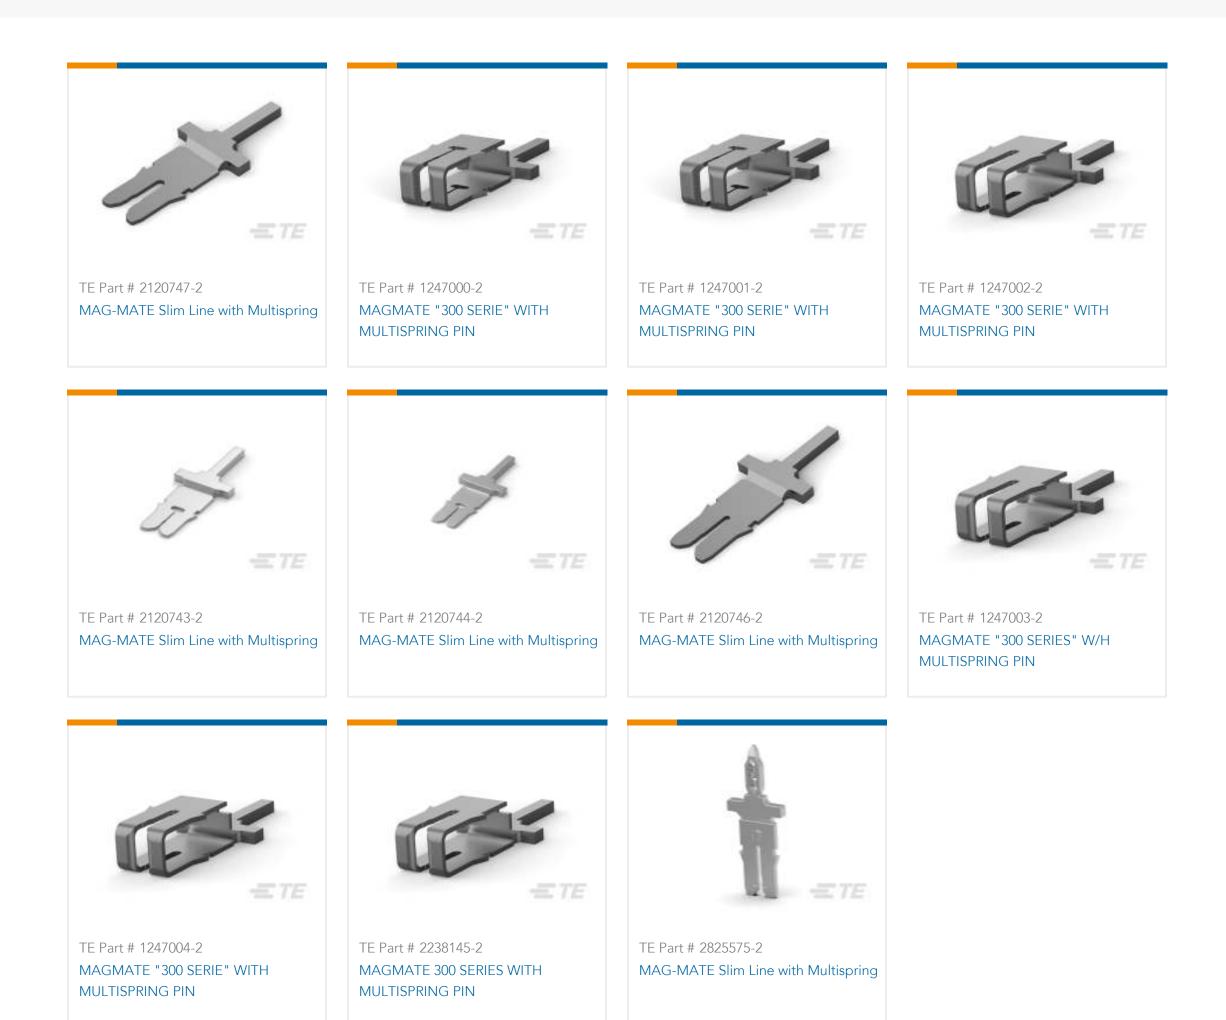

Also in the Series | MAG-MATE



Customers Also Bought



Magnet Wire Terminals, Multispring Pin, .4 – .63 mm Magnet Wire, 26 – 23 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



TE Part #2338758-4	TE Part #2338759-3	TE Part #2338759-4	TE Part #2338760-3
COAX CABLE ASSY GEM , FM BODY, E22279700	COAX CABLE ASSY GEM , GPS BODY, E1600250	COAX CABLE ASSY FAKRA AUTOMATED GMI700	COAXCABLE ASSY GEM ,ONSTAR IP, E21915700
	-ETE		
TE Doct #2220762.2	TE Dort #E 240641 2		
COAXCABLEASSY GEM , ONSTAR IP,	SPACER, SLUG BLADE (120)		
E21915600			
TE Part #2338762-2 COAXCABLEASSY GEM , ONSTAR IP, E21915600	TE Part #5-240641-2 SPACER,SLUG BLADE (120)		

Documents

Product Drawings

MAG-MATE Slim Line with Multispring

English

MAG-MATE Slim Line with Multispring

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2120745-2_A_c-2120745-2-a.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_2120745-2_A_c-2120745-2-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2120745-2_A_c-2120745-2-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance Product Compliance

English

Magnet Wire Terminals, Multispring Pin, .4 – .63 mm Magnet Wire, 26 – 23 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



Product Compliance

English