


LOC		DIST		REVISIONS			
GP	00	PL	LTR	DESCRIPTION	DATE	DWN	APVD
S				REVISED PER ECO-12-000090	30JAN2012	CJV	SLB

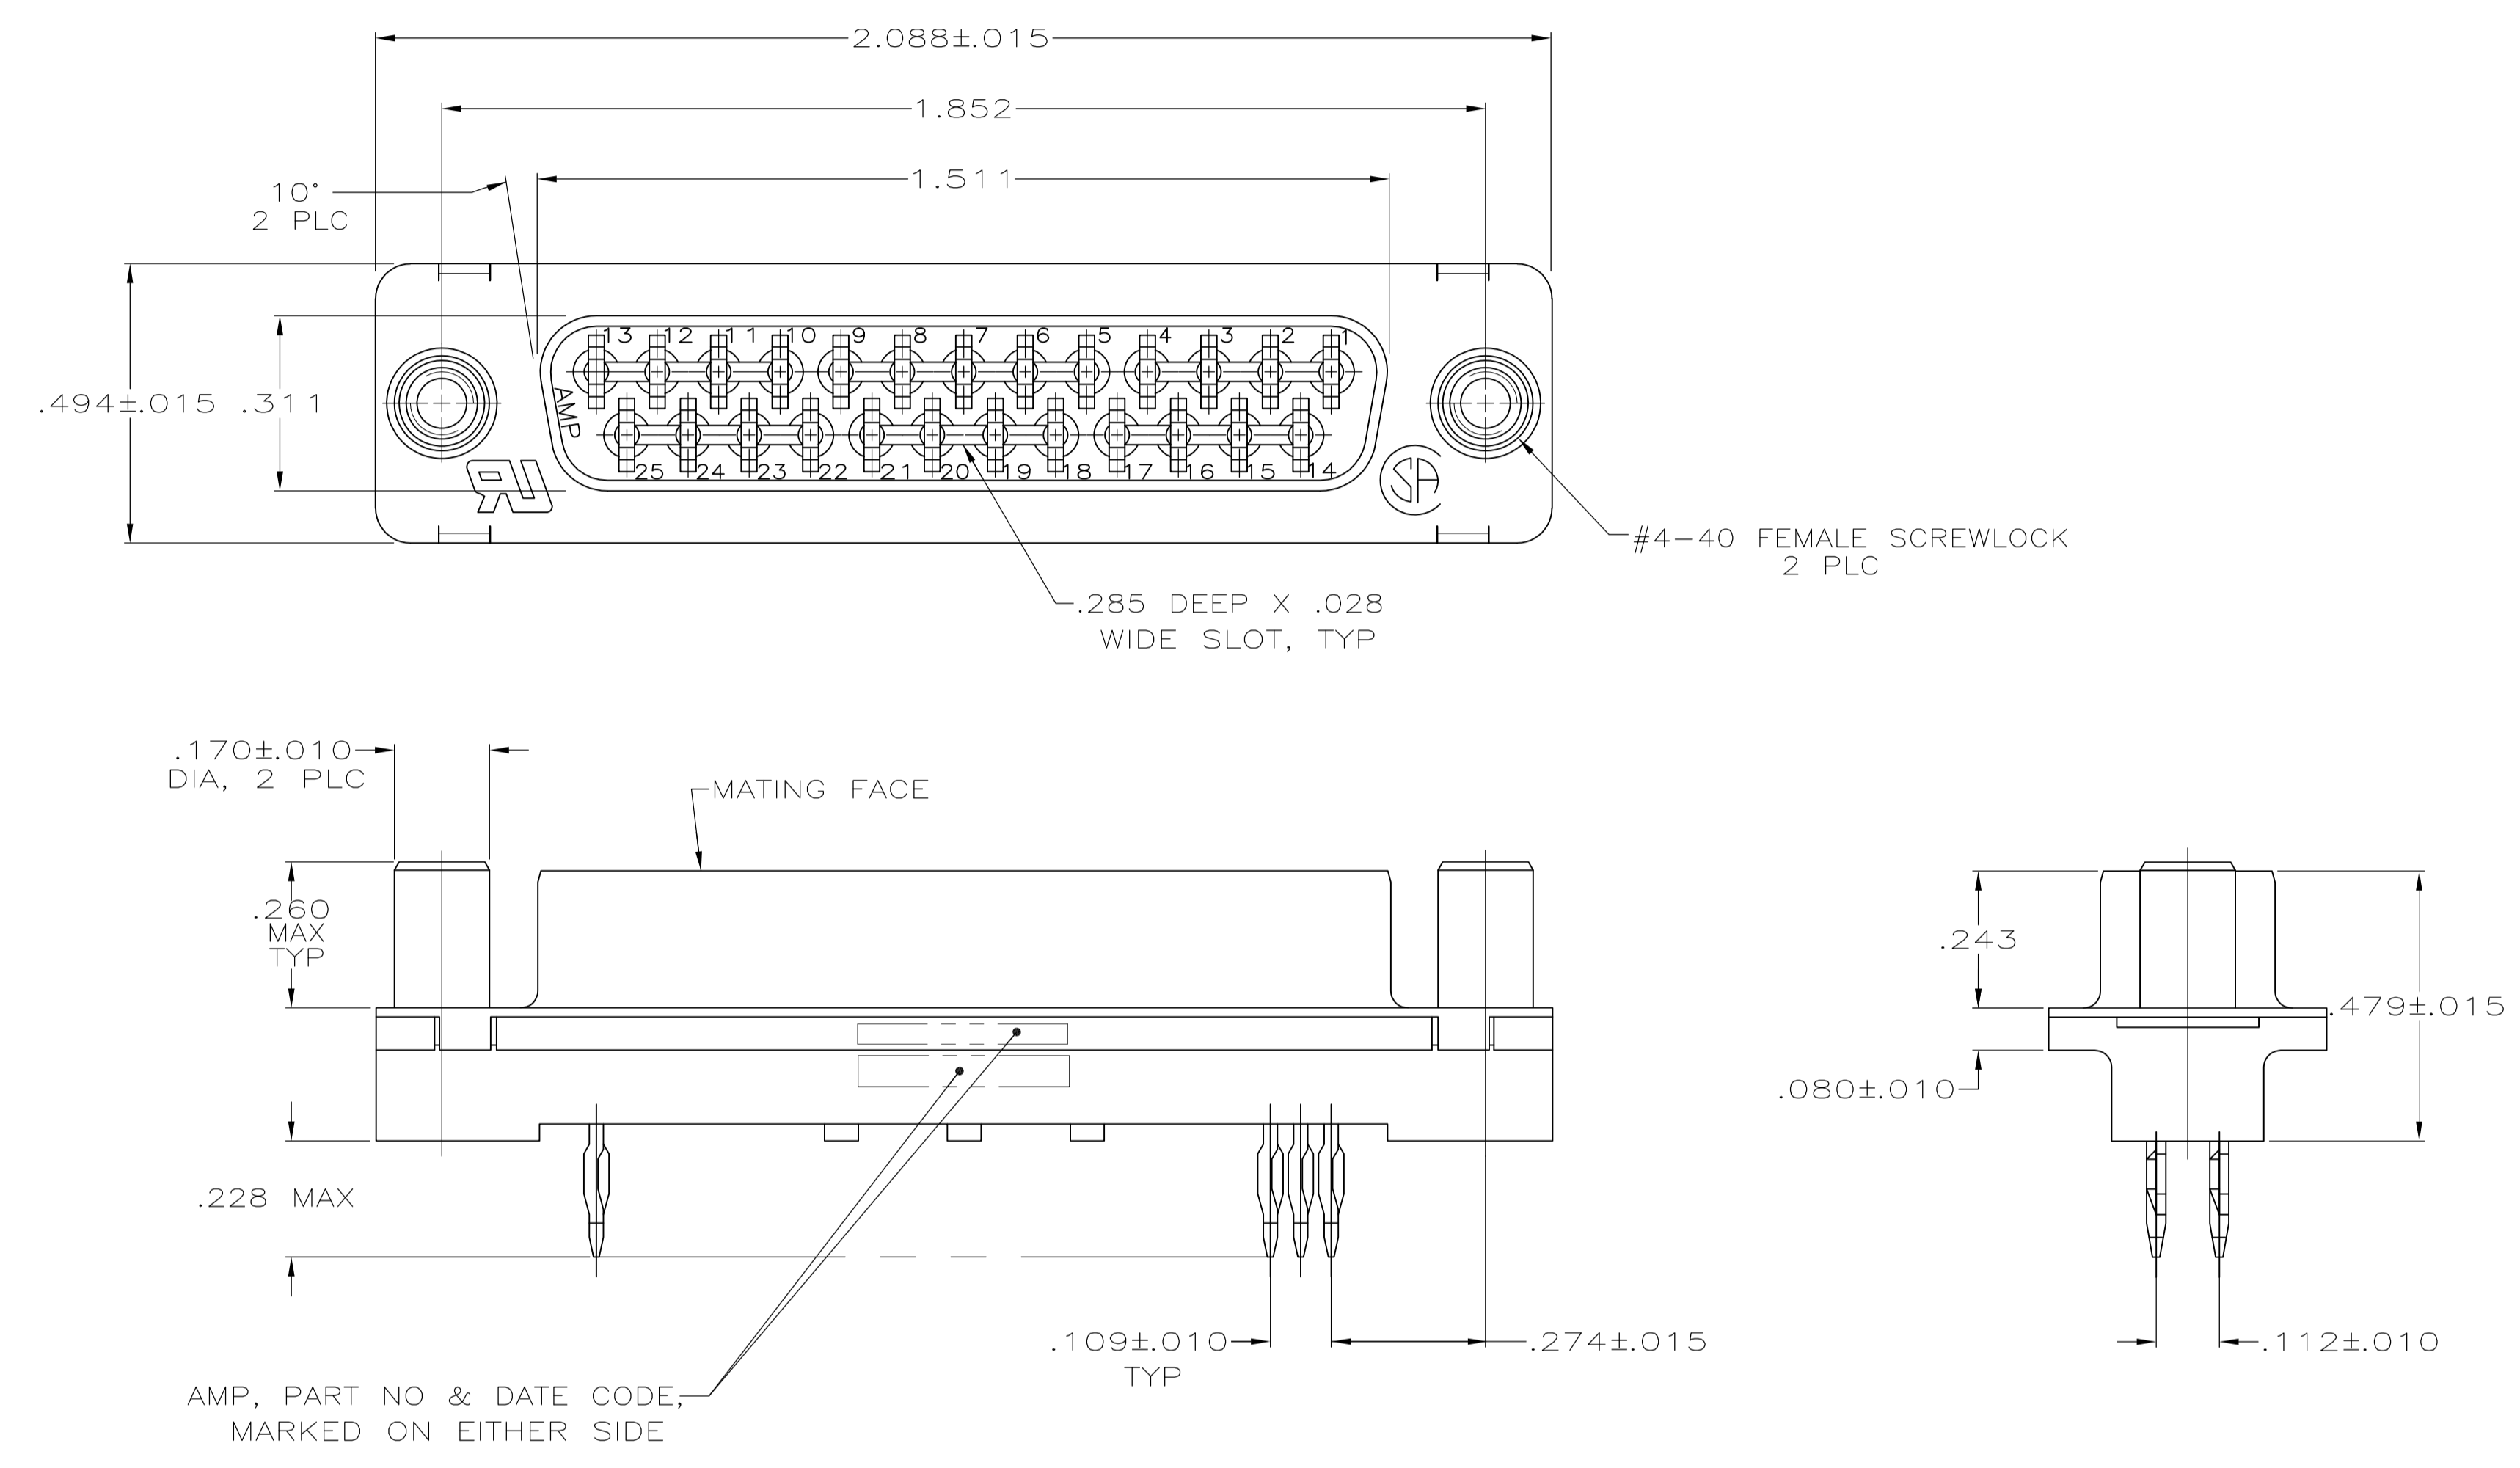

- 1 FOR USE WITH .093 MINIMUM THICK PRINTED CIRCUIT BOARD. REFER TO APPLICATION SPECIFICATION FOR PRINTED CIRCUIT BOARD LAYOUT DIMENSIONS AND FINISH RECOMMENDATIONS.
- 2 MOLDED PARTS: FLAME RETARDANT 94V-0 RATED GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK.
- 3 CONTACTS: COPPER ALLOY.
- 4 SHELL: CARBON STEEL.
- 5 HARDWARE: ZINC ALLOY
- 6 HARDWARE: SCREWLOCKS: CLEAR TRIVALENT CHROMATE COATING.
- 7 SHELL: BRIGHT TIN PLATED.
- 8 GOLD FLASH IN MATING AREA.
 .000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN.
 ALL OVER .000050 MINIMUM NICKEL.
- 9 .000030 MIN GOLD IN MATING AREA.
 .000100 MIN TIN OR TIN-LEAD ON COMPLIANT PIN.
 ALL OVER .000050 MIN NICKEL.
 OR
 GOLD FLASH OVER PALLADIUM NICKEL.
 .000030 MIN TOTAL IN MATING AREA.
 .000100 MIN TIN OR TIN-LEAD ON COMPLIANT PIN.
 ALL OVER .000050 MIN NICKEL.

OBsolete	9	745928-2
	8	745928-1
		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN W LENKER 5-31-88	APVD
0 PLC ± -	1 PLC ± -	CHK S WELDON 6-1-88	NAME
2 PLC ± -	3 PLC ± .005	PRODUCT SPEC	RECEPTACLE ASSEMBLY, SIZE 3, 25 POSITION.
4 PLC ± -	ANGLES ± °	APPLICATION SPEC	WITH ACTION PIN CONTACTS, #4-40 SCREWLOCKS, FRONT METAL SHELL, MEDIUM PROFILE.
MATERIAL	FINISH	SIZE	CAGE CODE DRAWING NO
2 3 4 5	6 7	A1	00779 C=745928
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV S

STE TE Connectivity