
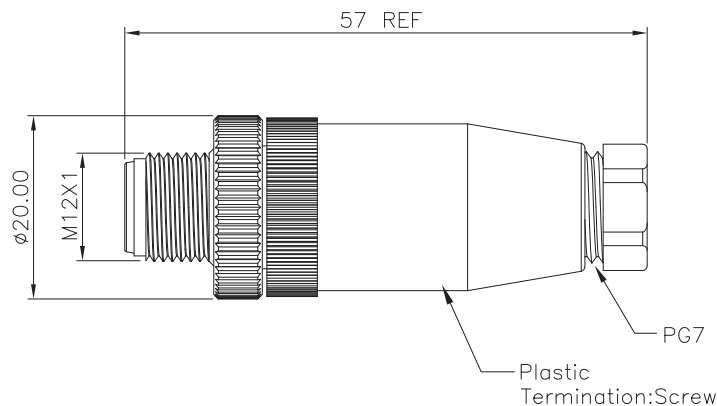




RoHS Compliant




Specifications:  
 Current Rating:4A  
 Voltage Rating:250V AC/DC  
 Contact Resistance:10m ohm. Max.  
 Insulation Resistance:100M ohm. Min.  
 Operating Temperature Range:-25°C ~ +85°C  
 Material and Finish  
 Insulator:Nylon (UL94V-0)  
 Contact:Brass,Gold Plated  
 Coupling Screw:Brass,Nickel Plated  
 Outer Shell:Nylon Black  
 Mechanical Performance  
 Waterproof Rate:IP67  
 Application Cable OD:4~6mm

How to Order

M12-XXP-A-AE4

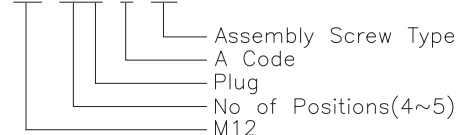

Pin Assignments Front View



4Pin



5Pin

F				DRAWN: Joy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.25
E					
D				CHECKED: Andrew	UNIT: MM
C					SCALE: 1:1
B				APPROVAL: Bill He	SHEET: 1/1
A	14-Feb-2020		Joy Liu		PROJECTION:
REV	DATE	FILE	BY		

		ON-SHORE TECHNOLOGY, INC.	
		DESCRIPTION: M12 PLUG A CODE STRAIGHT ASSEMBLY SCREW TYPE	
PART NO:		M12-XXP-A-AE4	