


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	P		EC 0G3C 0766 04	27DEC04	BSV	JLG
		P1		REVISED PER ECO-09-020932	26AUG09	KK	AEG

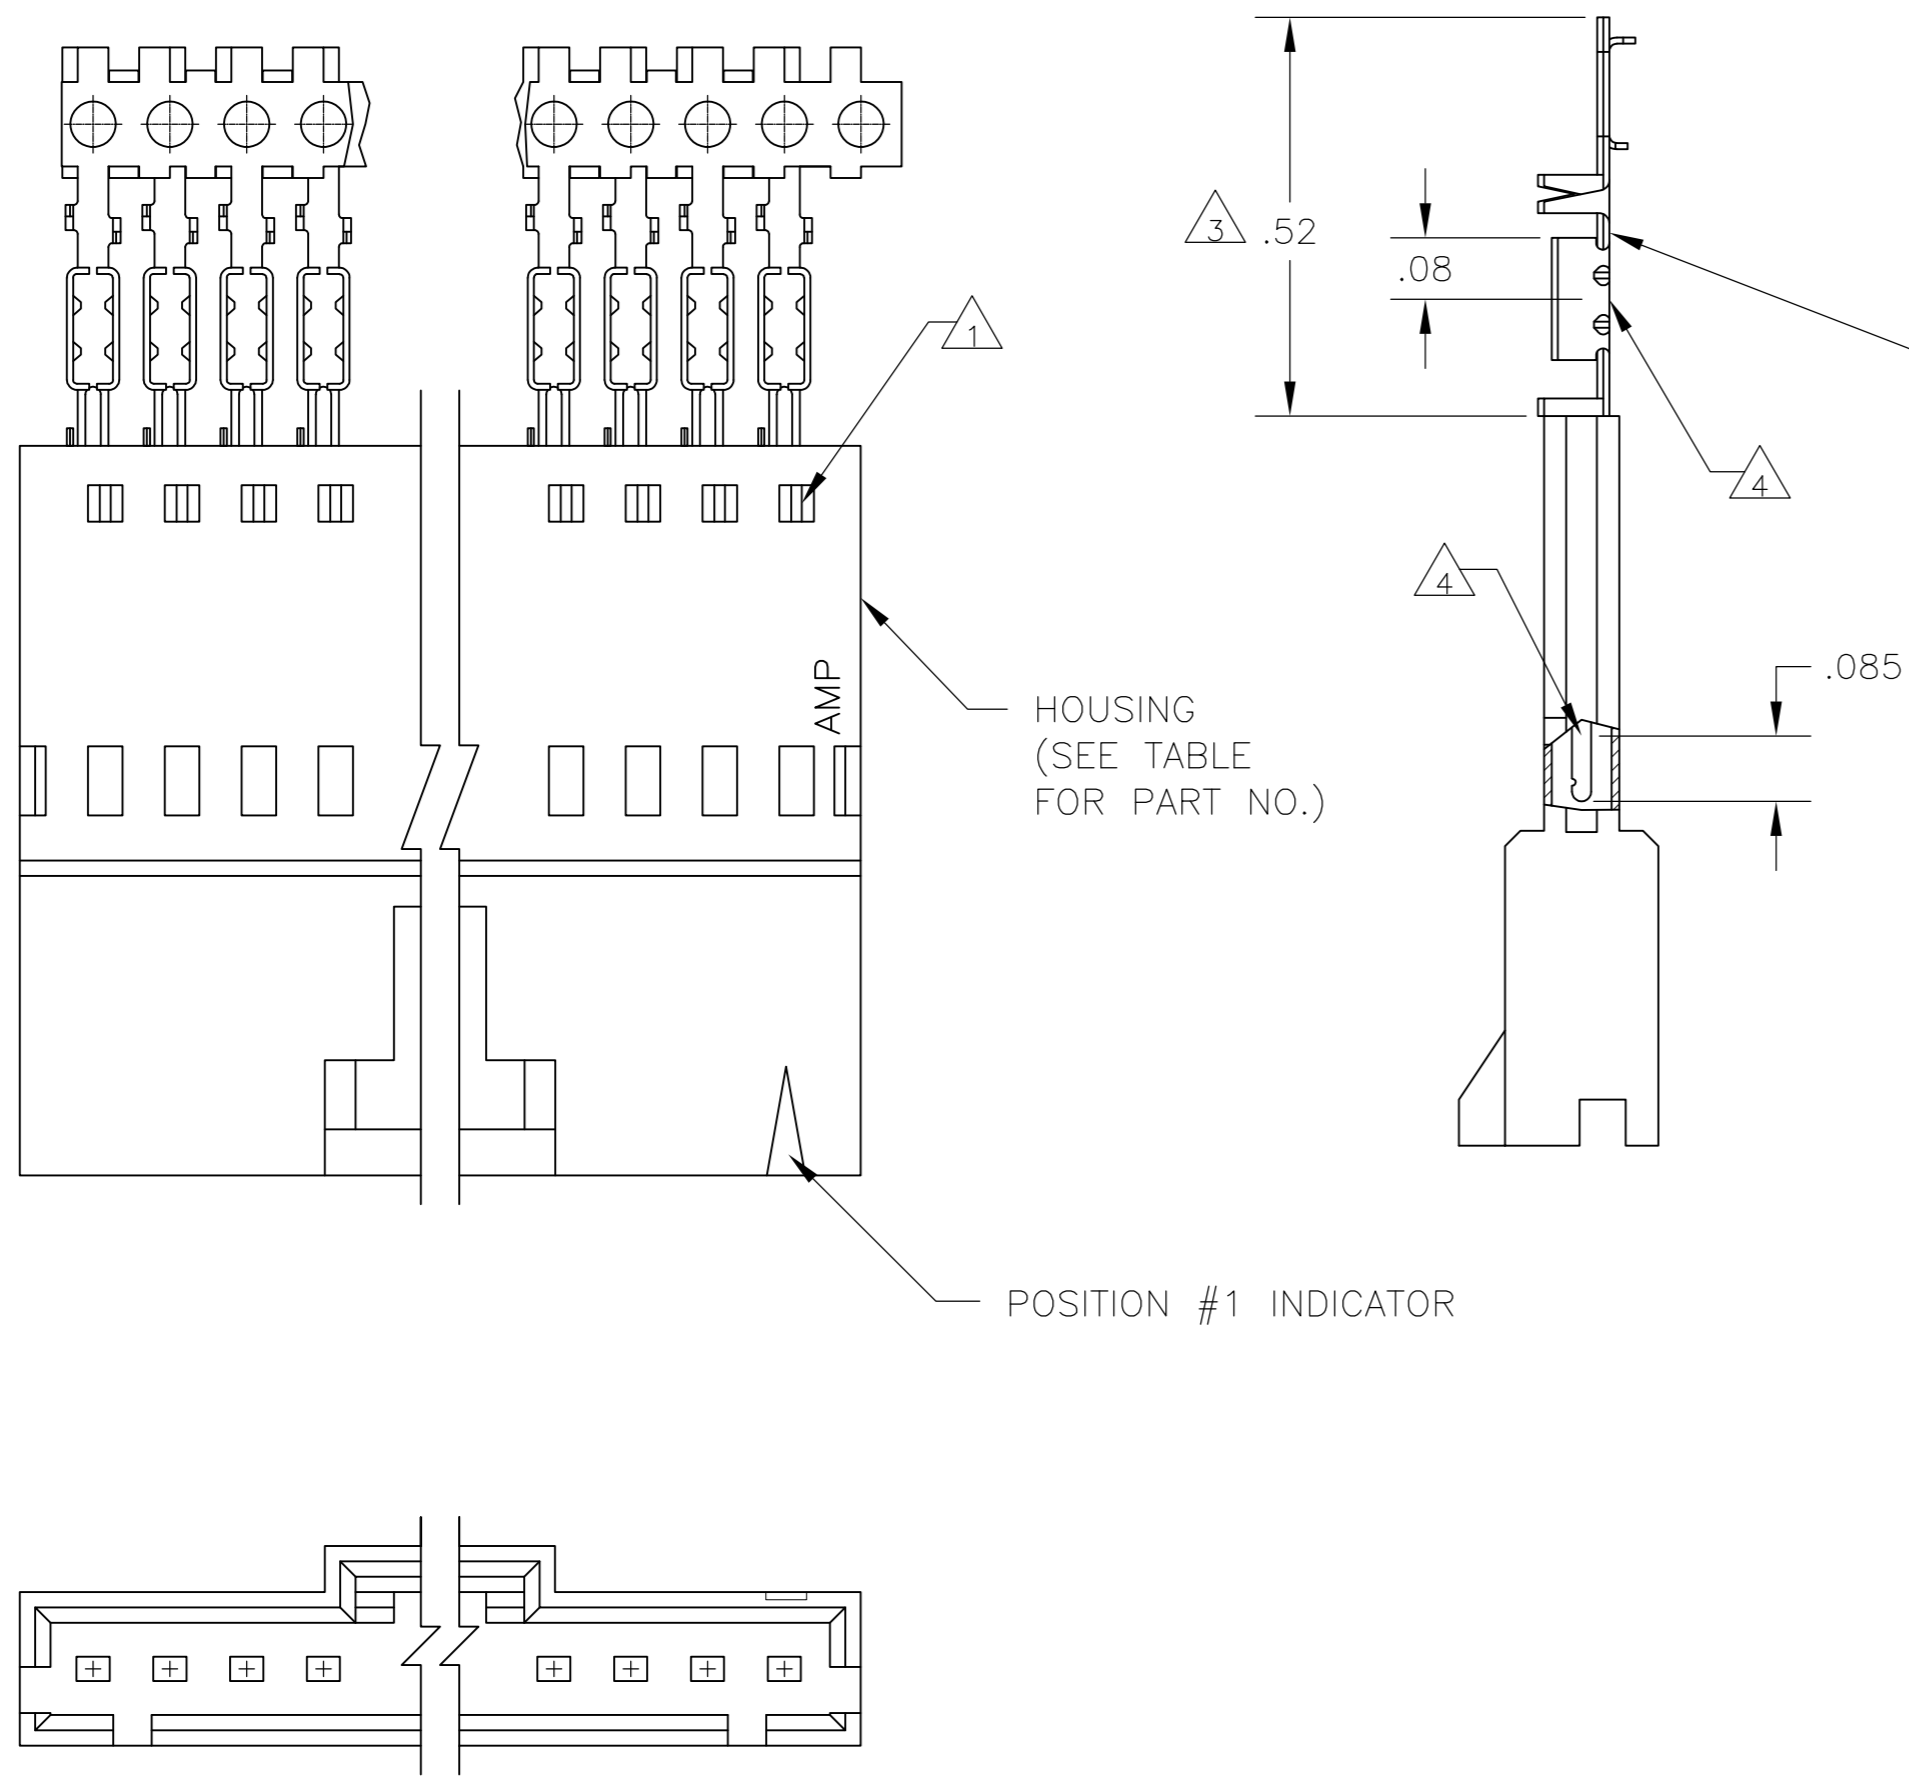

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

CALLOUT	DESCRIPTION	POS	PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
8	OBSOLETE	25				7-103660-4
8	OBSOLETE	24				7-103660-3
8	OBSOLETE	23				7-103660-2
8	OBSOLETE	22				7-103660-1
8	OBSOLETE	21				7-103660-0
8	OBSOLETE	20				6-103660-9
8	OBSOLETE	19				6-103660-8
8	OBSOLETE	18				6-103660-7
8	OBSOLETE	17				6-103660-6
8	OBSOLETE	16				6-103660-5
8	OBSOLETE	15				6-103660-4
8	OBSOLETE	14				6-103660-3
8	OBSOLETE	13				6-103660-2
7	OBSOLETE	25				2-103660-4
7	OBSOLETE	24				2-103660-3
7	OBSOLETE	23				2-103660-2
7	OBSOLETE	22				2-103660-1
7	OBSOLETE	21				2-103660-0
7	OBSOLETE	20				1-103660-9
7	OBSOLETE	19				1-103660-8
7	OBSOLETE	18				1-103660-7
7	OBSOLETE	17				1-103660-6
7	SUPERSEDED	16				1-103660-5
7	SUPERSEDED	15				1-103660-4
7	SUPERSEDED	14				1-103660-3
7	SUPERSEDED	13				1-103660-2
	SUPERSEDED BY 1-103945-1	12				1-103660-1
	SUPERSEDED BY 1-103945-0	11				1-103660-0
	SUPERSEDED BY 103945-9	10				103660-9
	SUPERSEDED BY 103945-8	9				103660-8
	SUPERSEDED BY 103945-7	8				103660-7
	SUPERSEDED BY 103945-6	7				103660-6
	SUPERSEDED BY 103945-5	6				103660-5
	SUPERSEDED BY 103945-4	5				103660-4
	SUPERSEDED BY 103945-3	4				103660-3
	SUPERSEDED BY 103945-2	3				103660-2
	SUPERSEDED BY 103945-1	2				103660-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103945
- 6 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 7 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 8 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 1-103945-1	1-103653-1	12	1-103660-1
SUPERSEDED BY 1-103945-0	1-103653-0	11	1-103660-0
SUPERSEDED BY 103945-9	103653-9	10	103660-9
SUPERSEDED BY 103945-8	103653-8	9	103660-8
SUPERSEDED BY 103945-7	103653-7	8	103660-7
SUPERSEDED BY 103945-6	103653-6	7	103660-6
SUPERSEDED BY 103945-5	103653-5	6	103660-5
SUPERSEDED BY 103945-4	103653-4	5	103660-4
SUPERSEDED BY 103945-3	103653-3	4	103660-3
SUPERSEDED BY 103945-2	103653-2	3	103660-2
SUPERSEDED BY 103945-1	103653-1	2	103660-1

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.BROWN 26JUL00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK K.WRIGHT 26JUL00	Tyco Electronics	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.WRIGHT 26JUL00	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE	
2 PLC ± -	3 PLC ± -	108-25034	SIZE	RESTRICTED TO
4 PLC ± -	ANGLES ± -	114-25026	CAGE CODE	
FINISH	SEE TABLE	WEIGHT -	DRAWING NO	
		CUSTOMER DRAWING	A2 00779	103660
			SCALE 4:1	SHEET 1 OF 1 REV P1