

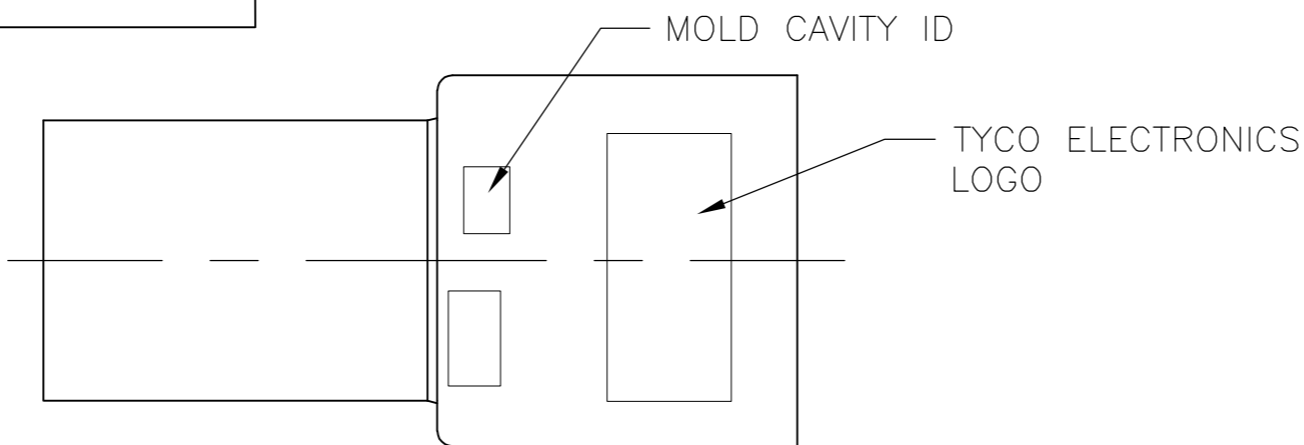
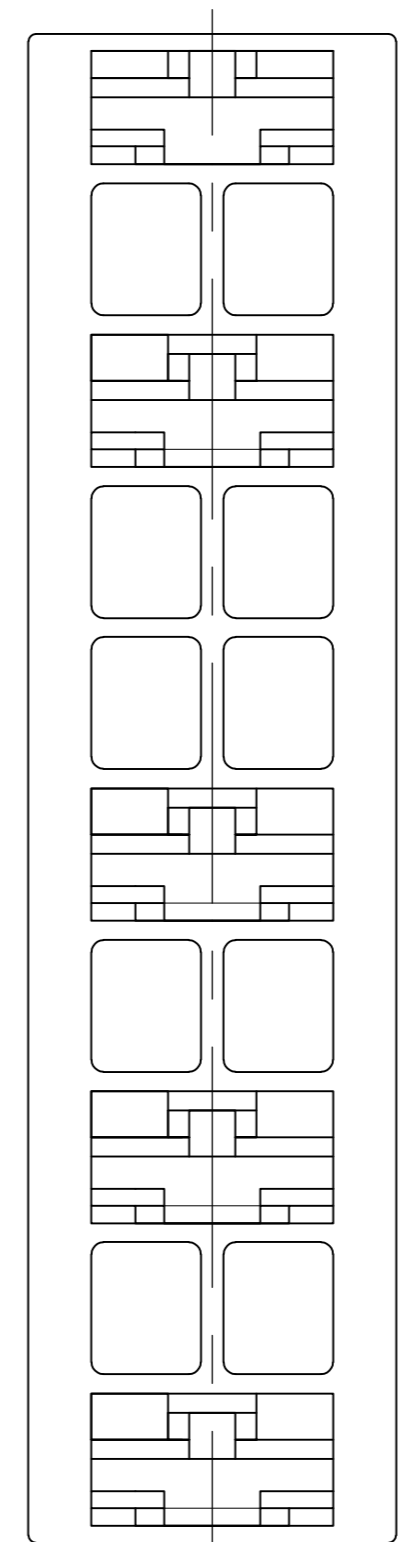


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	B	REVISED PER ECR-16-001902	22MAR2016	BW	JP		

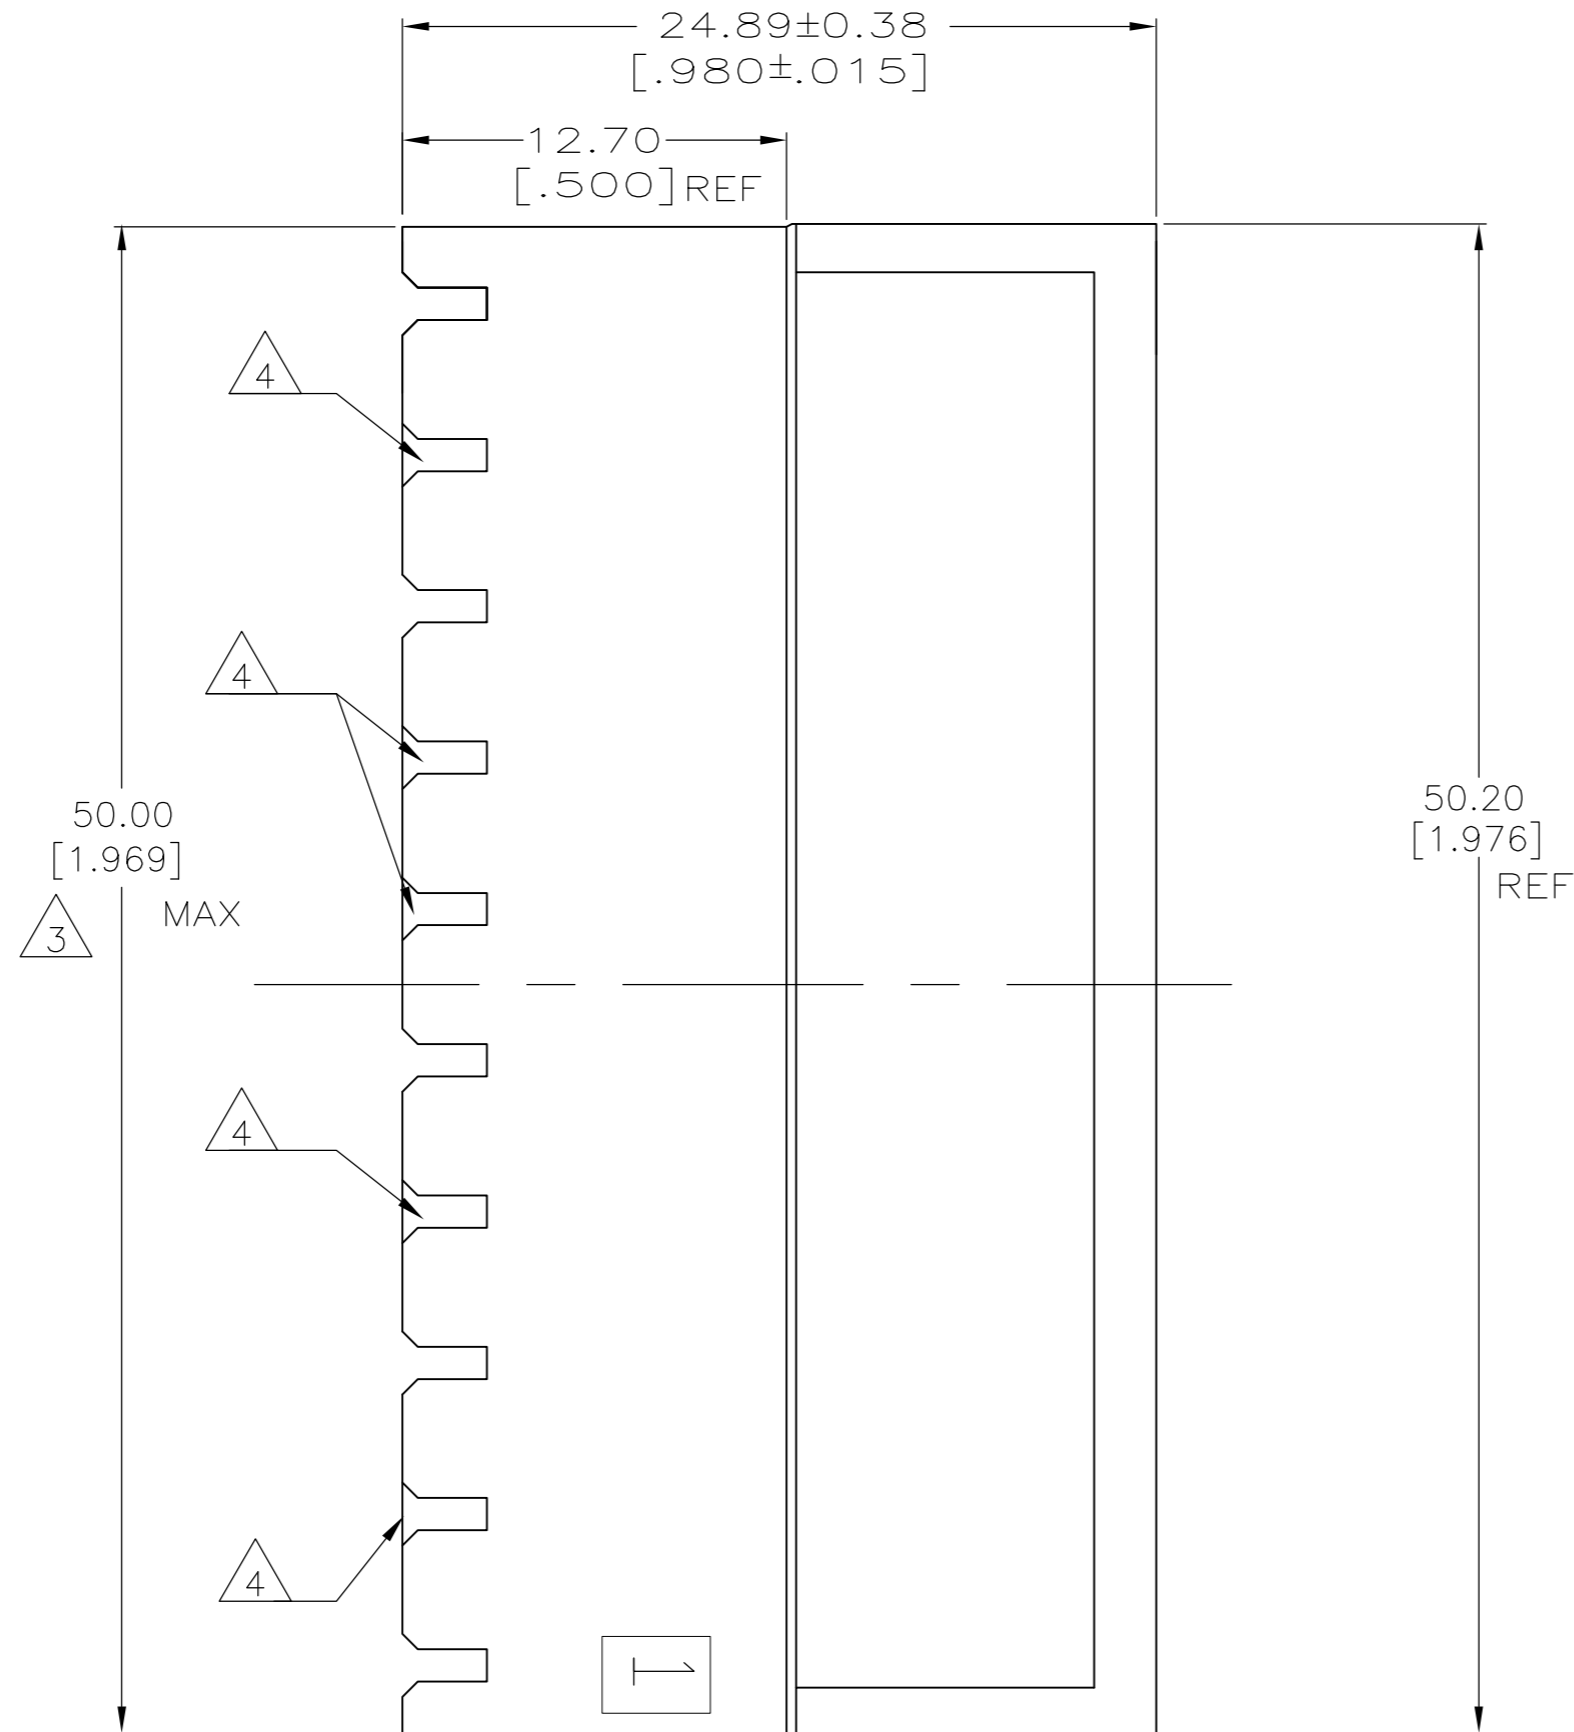

- 1 ACCEPTS RECEPTACLE CONTACTS 1217378(#18-#22 AWG SINGLE WIRE), 1217094(#18-#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).
- 2 CIRCUIT CENTERLINES 5.00 [.197]
- 3 HOUSING WIDTH MEASURED ACROSS CIRCUITS AT CENTERLINE DATUM [-A-].
- 4 RELIEF SLOTS ARE OPTIONAL FOR BLOCKED CIRCUITS
- 5 521836-1 IS SHOWN
- 6 PRELIMINARY - NOT FOR PRODUCTION

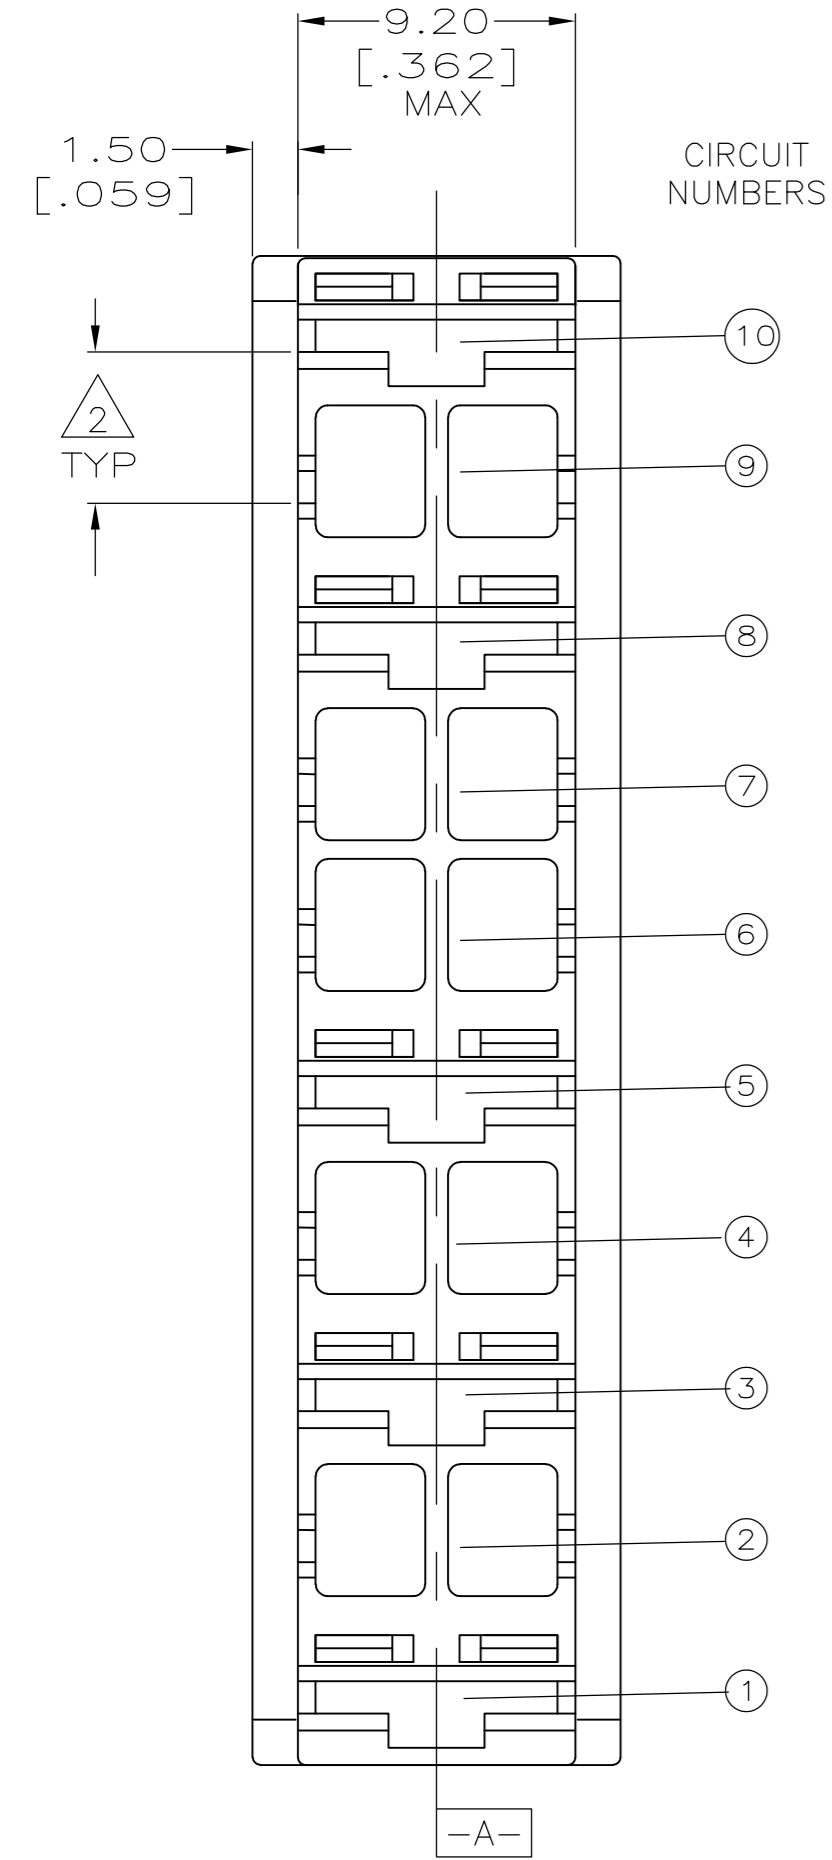

BLOCKED CIRCUITS	COLOR	PART NUMBER
6 & 7	BLUE	521836-6
6	BLACK	521836-5
6	NATURAL	521836-4
2,4,6,7 & 9	NATURAL	521836-3
2,5,6,7 & 8	BLUE	521836-2
2,4,6,7 & 9	BLUE	521836-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	JR RUTH	13JUL05
CHK	R LONDON	13JUL05
APVD	R LONDON	13JUL05
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		

STE TE Connectivity

NAME: HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35 [.250] SERIES, 10 POSITION / 5 CIRCUIT

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=521836	RESTRICTED TO	-
SCALE	4:1	SHEET	1 of 1	REV	B		

CUSTOMER DRAWING