


NOTE.

- 1. 材質及び処理 : ステンレス鋼 (≠2)
MATERIAL AND FINISH. STAINLESS STEEL
- 2. 推奨使用ケーブル外径 : 4.3±0.2
CABLE O.D
- 3. 推奨ケーブルクランプカシメ外径 :
SHIELD CAULKING O.D

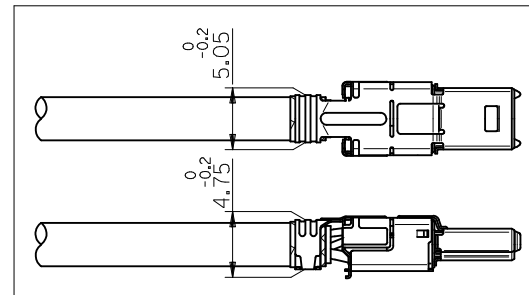

- 4. 本製品のケーブルクランプ部のグラッドはフレームグラッドを目的としており、シグナルグラッドとしての機能は保証致しません。
- 5. メッキ仕様 : ニッケルメッキ 1~3 μm
PLATING SPEC NICKEL

59744-1411	59744-1411
MATERIAL NO.	MODEL NO.

59744-1411
TRAY PACKAGE
オーダー番号 ORDER NO.

RELEASED EC NO: J2010-2025 DRWNR: KAKATA CHKD: JMARONEY APPR: MYAGI	2010/04/08	2010/04/09	2010/04/13	DESCRIPTION REV 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
	10 UNDER	±0.2	DRAWN BY		DATE	TITLE		0.5 I/O CONN REC 14PIN SHIELD MOLEX INCORPORATED SD-59744-002 1 OF 1						
	10 OVER 30 UNDER	±0.25	CHECKED BY		DATE	APPROVED BY						DATE		
	30 OVER	±0.3	JMARONEY		2010/04/09	MYAGI						2010/04/13		
ANGULAR ±3 °					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.					
SEE CHART					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							