

6

5

4





3

2

1

NOTES:

1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL.
3. PRODUCT SPECIFICATION: PS-45424-001.
4. PACKAGING SPECIFICATION: PK-45481-001.

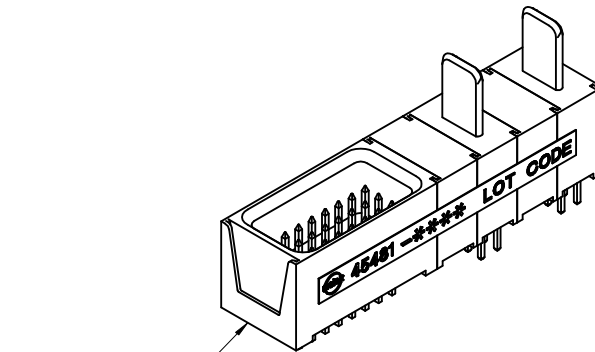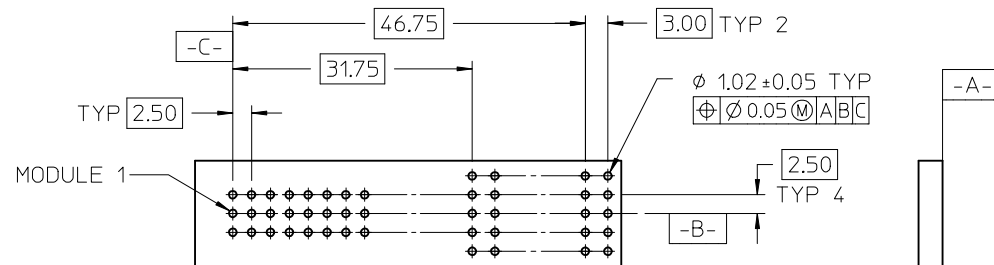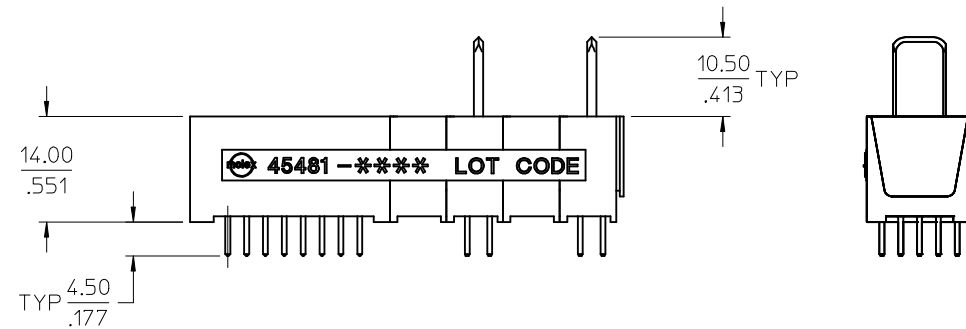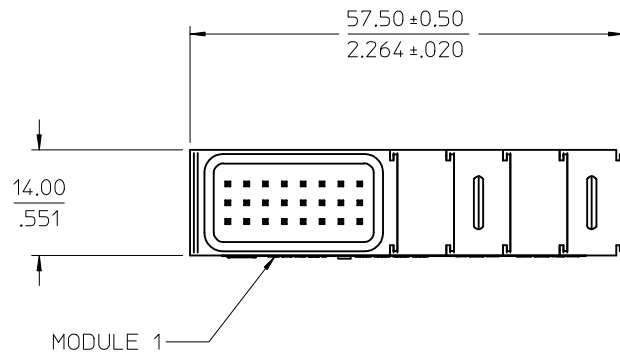

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: 3.18/.125
PCB TOLERANCE: ±0.05/.002

ADDED STANDOFFS	DESCRIPTION
EC NO: UCP2006-0519	2005/09/12
DRWN: ADRATNOL	2005/09/15
CHKD: KSAWIEC	2005/09/15
APPR: APATEL	2005/09/15
REV	

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
ADRATNOL	2005/07/07
CHECKED BY	DATE
JSCHAFFER	2005/07/07
APPROVED BY	DATE
APATEL	2005/07/07

MATERIAL NO.
45481-0192

SIZE
A

SCALE
1:1DESIGN UNITS
METRICTHIRD ANGLE
PROJECTION

TITLE
POWER DOCK ASSEMBLY POWER VERTICAL SOLDER TAIL MOLEX INCORPORATED

DOCUMENT NO.	SHEET NO.
SD-45481-192	1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

5

4

3

2

1