


| – 1 | ц т | | |
|------------|------------|--------------|--|
| <u> </u> | | <u> </u> | |

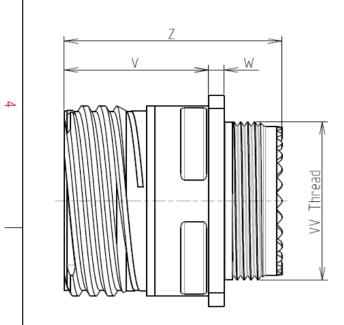

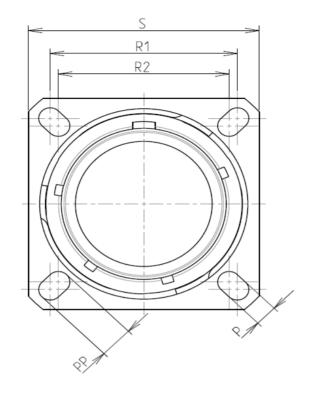



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

| <pre></pre> | | | |
|-------------|------------------------|--|---|
| | -Shell Material | : Aluminium | ┢ |
| | -Shell Plating | : Nickel | ┢ |
| | -Insulator | : Thermoplastic | |
| | -Contacts | : Copper Alloy | ┢ |
| | -Seals & Grommet | : Silicon Elastomer | ┢ |
| N | -Contact Plating | : Gold over copper Alloy 0.8µm minimum | F |
| | -Durability | : 500 Mating cycles | L |
| | -Delivered without Sou | uriau contacts | |
| | -Temperature Range | : -65°C to +200°C | |
| | -Salt Spray | : 48 hours | |
| | -Mass | : 14.72 g ± 10% | |
| | | | |
| | | | |

8D 0

G

13

F

26

Ρ

F

D

L

| Connector dimension | | | |
|---------------------|---------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 23.01 | | |
| R2 | 20.62 | | |
| S | 28.6±0.3 | | |
| V | 20.83+0/-1.25 | | |
| W | 2.1/2.5 | | |
| Z | 31.5 Max | | |
| VV THREAD | M18x1-6g | | |


Delivered W/O Contacts

CONTACT LAYOUT : 13-26

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : D





| | ω | | А | | |
|-------------------|---|--|-----------|--------|---|
| A | | | | | 4 |
| | | | | | |
| AS EXA | AMPLE | | | | 3 |
| s whic er of t | non-conformit ch does not co he Parties or t on, technical n | mply with by a third par otice.) | | | |
| untry FR | Jurisdiction & Control List Not Listed | | | | 2 |
| 3F2 | 6PDL | | | | |
| | | | | | |
| | | CUSTOME | R DRAWING | MOD N° | |
| um | Receptacl | | | | |
| ar | NPRDS / PROJECT | | | | |
| | | | 59 | | 1 |
| J.CC | COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | |
| | U DRG N° SHEET | | | | |
| F26 | SPDL-C | | ٨ | 1/2 | J |
| | В | 1 | А | | |
| | | | | | |

| _ | Т | ۵ | г | m | D | 0 |
|---|---|---|-----|---|--|---|
| | | Contact Layout | | | | Panel Cutou |
| 4 | | 26 | | | Â | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | | 2#12 6#22D | - | | * * | |
| ŝ | Ctc A B C D E F 1 2 | 13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0 | | | | Dim ØA ØAA R1 ØT |
| | _ | | | | | SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat |
| N | | | | | | PN: 8D013F |
| _ | | | | | A 14-10-20 ISS DATE Designed By: | 16 First Release Latest modification - by Date: |
| _ | | | | | TITLE SCALE NA | General linear Tolerances: |
| | | | | | SOURIAI | |
| | | | - | | FORMAT A3 | SOURIAU 8D013F2 |
| | Н | G | F F | E | D | C |

