



## Features

- 60Watts peak pulse power ( $t_p = 8/20\mu s$ )
- SOD-882 Package
- Bidirectional configurations
- R2R + Zener technology
- Low clamping voltage
- Low leakage current
- Ultra low capacitance ( $C_j=0.3pF$  typ.)
- Protection one data/power line to:
  - IEC 61000-4-2 ±10kV contact ±15kV air
  - IEC 61000-4-4 (EFT) 40A (5/50ns)
  - IEC 61000-4-5 (Lightning) 3A (8/20μs)

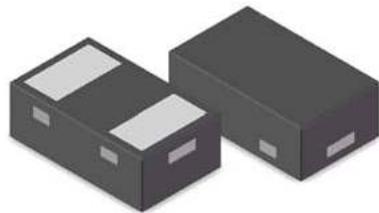

Package: SOD-882



Schematic Diagram

## Applications

- USB3.0, Firewire, DVI, HDMI, S-ATA
- Thunderbolt, Display Port
- Mobile HDMI Link, MDDI, MIPI, SWP / NFC

## Absolute Maximum Ratings ( $T_A=25^\circ C$ unless otherwise specified)

| Parameter   | Symbol    | Value       | Unit |
|---|-----------|-------------|------|
| Peak Pulse Power ( $T_P=8/20\mu s$ )                | $P_{PP}$  | 60          | W    |
| ESD contact/air discharge (IEC-61000-4-2)           | $V_{ESD}$ | 10/15       | kV   |
| Peak Pulse Current ( $t_p = 8/20\mu s$ )            | $I_{PP}$  | 3           | A    |
| Junction Temperature                                | $T_J$     | -55 to +125 | °C   |
| Storage temperature                                 | $T_{STG}$ | -55 to +150 | °C   |
| Maximum Lead Solder Temperature(10 second duration) | $T_L$     | 260         | °C   |

## Electrical Characteristics ( $T_A=25^\circ C$ unless otherwise specified)

| Parameter                        | Symbol    | Conditions       | Min | Typ | Max  | Unit |
|----------------------------------|-----------|------------------|-----|-----|------|------|
| Reverse stand-off Voltage        | $V_{RWM}$ |                  | -   | -   | 5.0  | V    |
| Reverse Breakdown Voltage        | $V_{BR}$  | $I_T=1mA$        | 6.5 | 8.5 | -    | V    |
| Reverse Leakage Current          | $I_R$     | $V_R=5.0V$       | -   | 5   | 100  | nA   |
| Clamping Voltage (IEC 61000-4-5) | $V_C$     | $I_{PP}=3A$      | -   | -   | 20.5 | V    |
| Trigger Voltage (IEC 61000-4-2)  | $V_T$     | $V_{ESD}=8kV$    | -   | 135 | -    | V    |
| Clamping Voltage (IEC 61000-4-2) | $V_C$     | $V_{ESD}=8kV$    | -   | 20  | -    | V    |
| Junction Capacitance             | $C_J$     | $V_R=0V, f=1MHz$ | -   | 0.3 | 0.35 | pF   |

## Typical Characteristic Curves

Fig.1 Peak Pulse Power Rating Curve

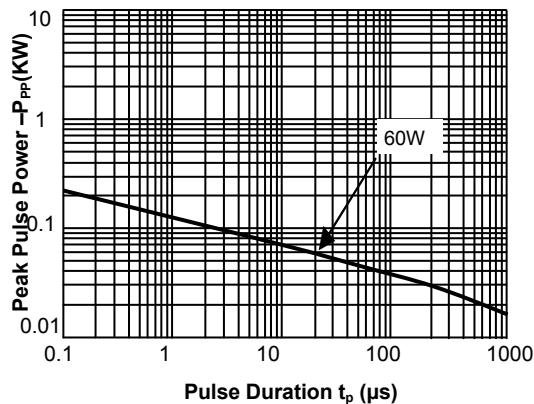


Fig.2 Pulse Derating Curve

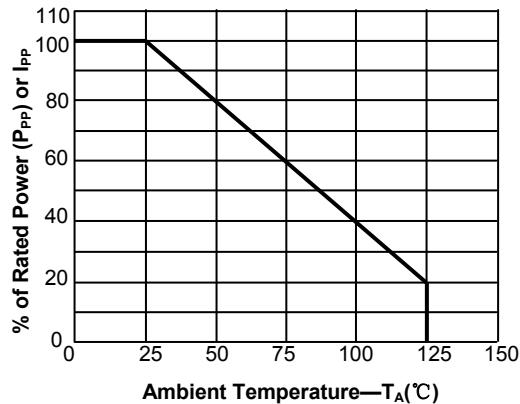


Fig.3 Pulse Waveform-8/20 $\mu\text{s}$

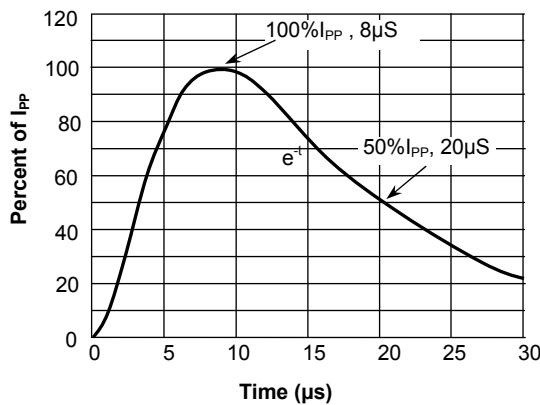


Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

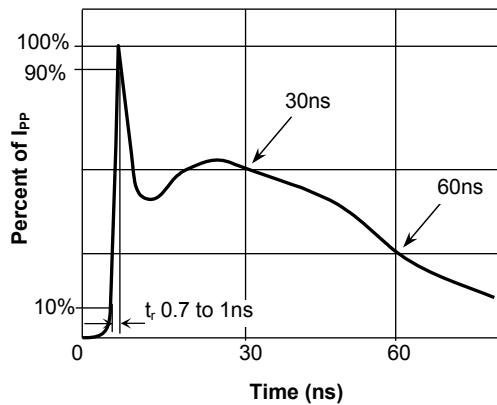


Fig.5 IEC61000-4-2 +8kV Contact Discharge





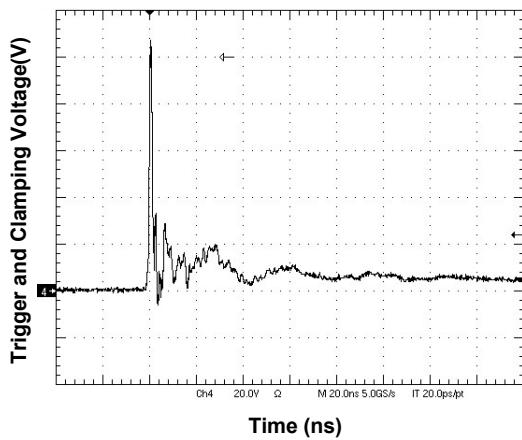


Fig.6 IEC61000-4-2 -8kV Contact Discharge

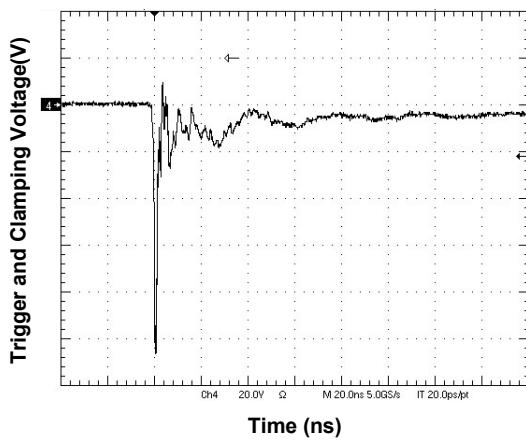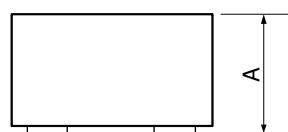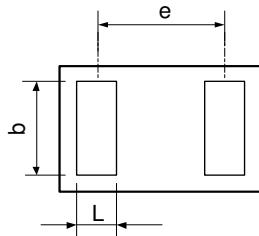


### Package Outline Dimensions

SOD-882

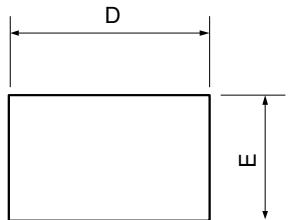

| Symbol | Milimeter |      |      |
|--------|-----------|------|------|
|        | min       | nom  | max  |
| D      | 0.95      | 1.00 | 1.05 |
| E      | 0.55      | 0.60 | 0.65 |
| A      | 0.45      | 0.50 | 0.55 |
| b      | 0.45      | 0.50 | 0.55 |
| L      | 0.20      | 0.25 | 0.30 |
| e      | 0.65BSC   |      |      |

### Recommended Pad Layout

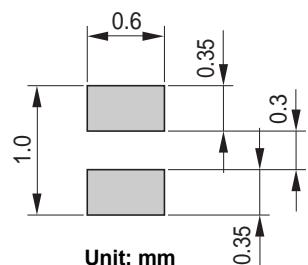

### Order Information

| MPN        | Package | Marking | Quantity         | HSF Status     |
|------------|---------|---------|------------------|----------------|
| GSEWT5B003 | SOD-882 | P       | 10,000pcs / Reel | RoHS Compliant |